



## Box Header 2.0mm SMT / Right Angle / Straight / Elevated Type


### Specifications

Current Rate: 2 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C


### Material

Insulator: LCP or Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated


## ORDER INFORMATION

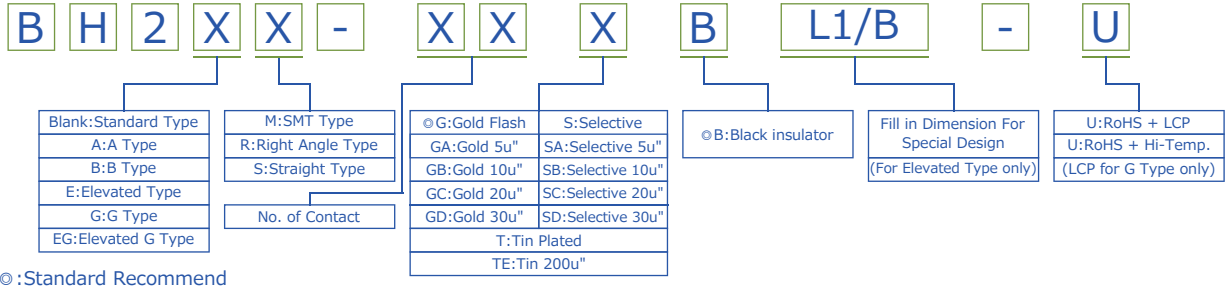

## Box Header 2.0mm H=5.6mm SMT / Right Angle / Straight Type

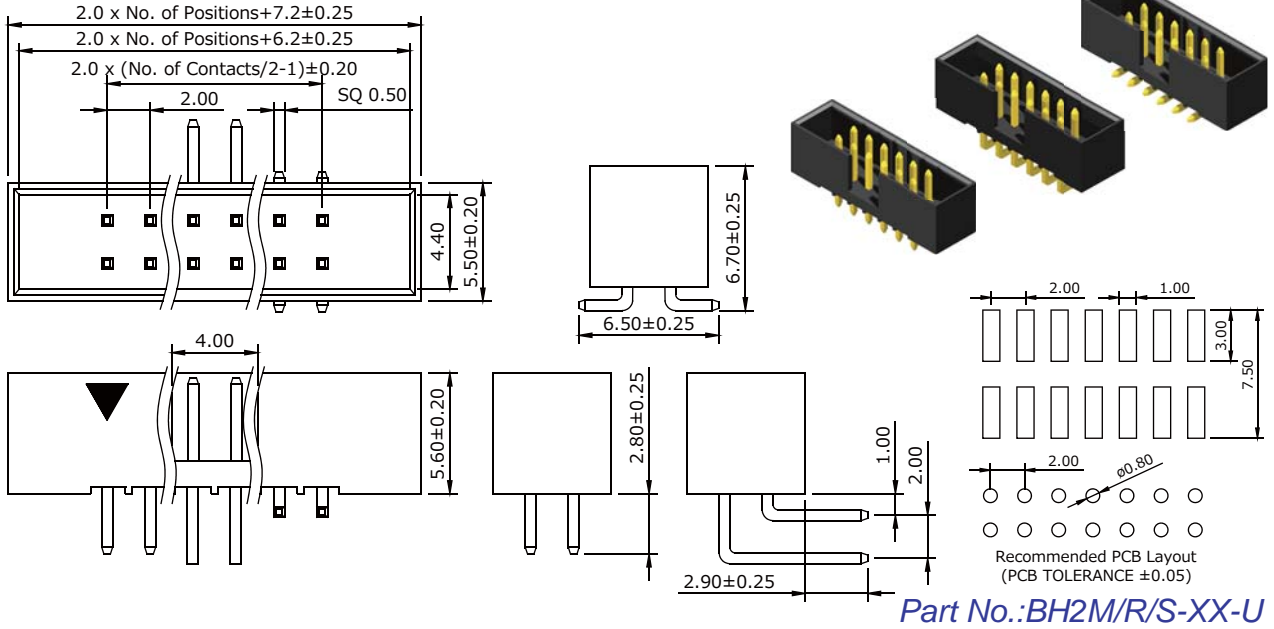

## Box Header 2.0mm H=5.6mm Elevated SMT / Straight Type

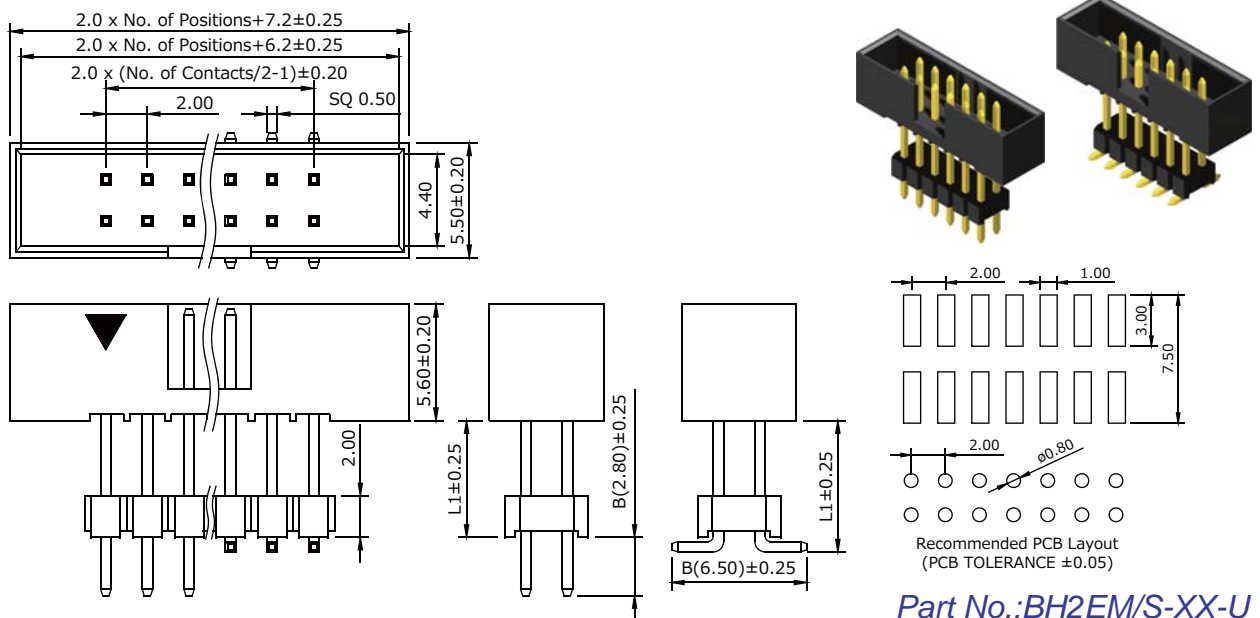

Box Header 2.0mm



ROHS

AMTEK CONNECTOR MANUFACTURER