

## Box Header 1.27x1.27mm SMT / Right Angle / Straight Type


### Specifications

Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated

## ORDER INFORMATION

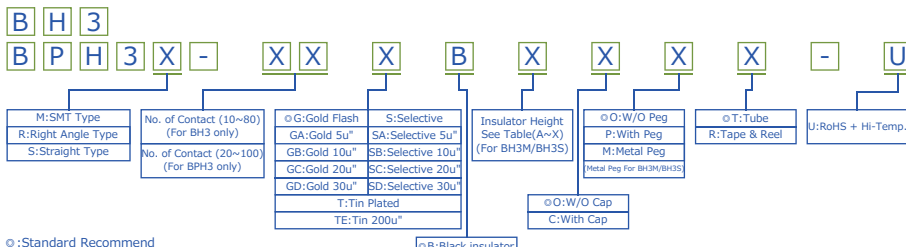

## Box Header 1.27x1.27mm SMT / Straight Type

| Plastic Height<br>(Code: G For Straight Only) |        |      |        |      |        |      |        |      |        |      |        |
|---|--------|------|--------|------|--------|------|--------|------|--------|------|--------|
| Code  | Height | Code | Height | Code | Height | Code | Height | Code | Height | Code | Height |
| A   | 5.70   | E    | 10.30  | I    | 12.20  | M    | 17.30  | R    | 10.40  | V    | 17.60  |
| B   | 7.30   | F    | 11.00  | J    | 13.50  | N    | 3.80   | S    | 10.70  | W    | 18.60  |
| C   | 9.40   | G    | 11.20  | K    | 14.20  | P    | 9.00   | T    | 14.10  | X    | 18.90  |
| D   | 9.60   | H    | 11.50  | L    | 15.20  | Q    | 10.20  | U    | 15.60  |      |        |

Part No.: BH3M/S-XX-U

## Box Header 1.27x1.27mm SMT / Right Angle / Straight Type

Part No.: BPH3M/R/S-XX-U