



Box Header 1.0mm SMT Type


Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C





Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

ORDER INFORMATION

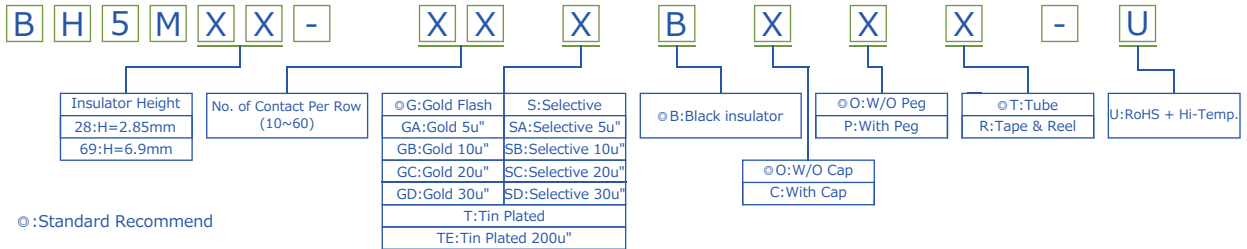





Box Header 1.0mm H=2.85mm SMT Type

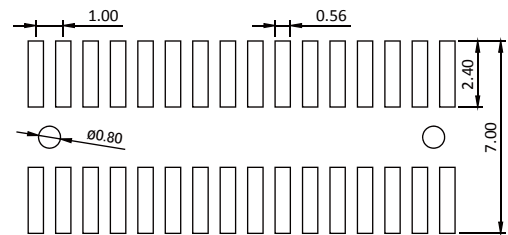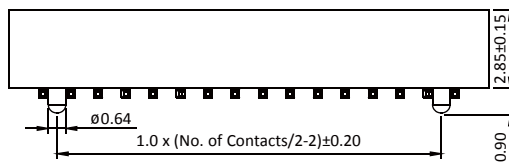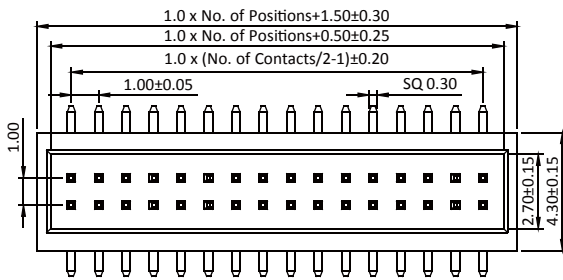

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.: BH5M28-XX-U

Box Header 1.0mm H=6.9mm SMT Type

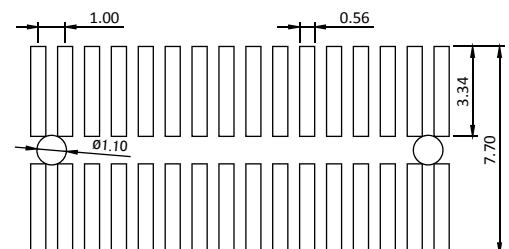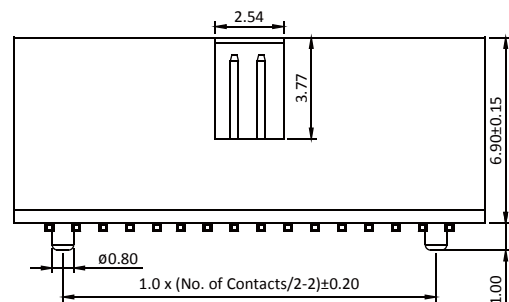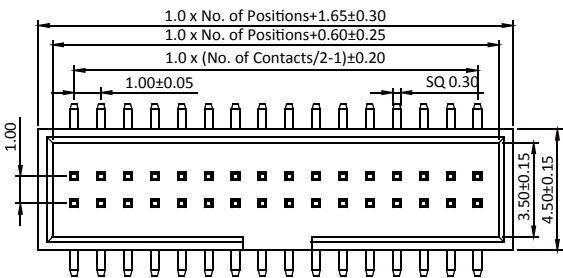

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.: BH5M69-XX-U

Box Header 1.0mm



ROHS