

Gas Discharge Tube (GDT) Data Sheet

Features


- Provide ultra-fast response to surge voltage from slow-rising surge of 100V/s to rapid-rising surge of 1KV/μs.
- Stable breakdown voltage.
- High insulation resistance.
- Low capacitance (≤2pF)
- High holdover voltage
- Large absorbing transient current capability.
- Micro-Gap Design
- Size: 8.0mm*10.5mm
- Storage and operational temperature: -40°C ~ +85°C
- Meets MSL level 1, per J-STD-020
- Safety certification: UL: E244458
- Tin plating, suitable for PCB soldering.



Applications

- Repeaters, Modems.
- Telephone Interface, Line cards.
- Data communication equipment.
- Line test equipment

Part Number Code

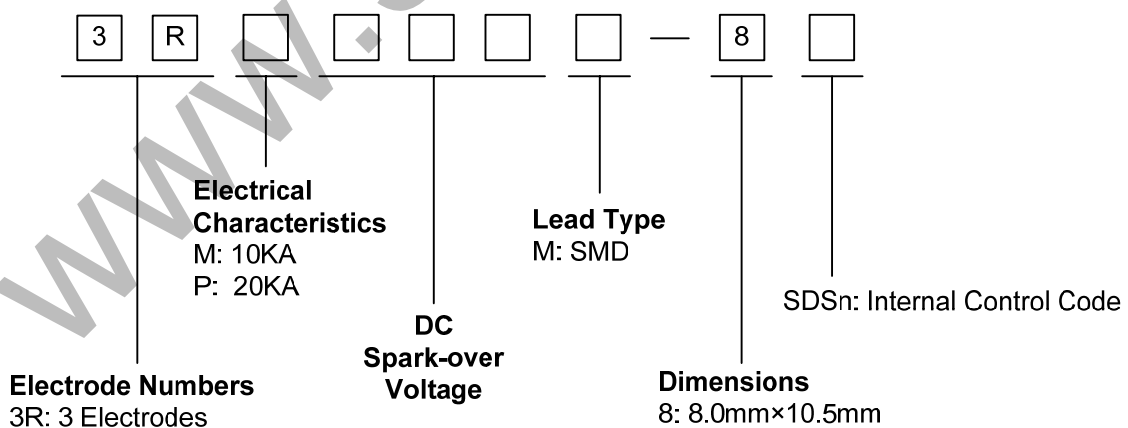

Marking

B : BrightKing Logo
 3RM090-8 : Device Marking Code
 YXXX : Date Code

Dimensions


	Dimension (mm)	
	Spec.	Tolerance
D	8.0	+0.2, -0.8
D1	7.6	±0.2
T	10.5	±0.5
B	0.5	±0.1
B1	2.0	±0.2

Electrical Characteristics


Part Number	Type ①	DC Spark-over Voltage	Maximum Impulse Spark-over Voltage	Nominal Impulse Discharge Current	Alternating Discharge Current	Impulse Life	Minimum Insulation Resistance		Maximum Capacitance	Device Marking Code
		100V/s	1000V/μs	8/20μs 10times	50Hz, 1sec	10/1000μs 100A	Test Voltage	(GΩ)	1MHz	
		(V)	(V)	(KA)	(A)	(times)	DC(V)		(pF)	
3RM075M-8	SDSn	75±20%	700	10	10	300	25	1.0	2.0	3RM075-8
3RM090M-8	SDSn	90±20%	700	10	10	300	50	1.0	2.0	3RM090-8
3RM150M-8	SDSn	150±20%	700	10	10	300	100	1.0	2.0	3RM150-8
3RM200M-8	SDSn	200±20%	700	10	10	300	100	1.0	2.0	3RM200-8
3RM230M-8	SDSn	230±20%	700	10	10	300	100	1.0	2.0	3RM230-8
3RM350M-8	SDSn	350±20%	850	10	10	300	100	1.0	2.0	3RM350-8
3RM400M-8	SDSn	400±20%	850	10	10	300	100	1.0	2.0	3RM400-8
3RM470M-8	SDSn	470±20%	950	10	10	300	250	1.0	2.0	3RM470-8
3RM600M-8	SDSn	600±20%	1300	10	10	300	250	1.0	2.0	3RM600-8
3RM800M-8	SDSn	800±20%	1500	10	10	300	250	1.0	2.0	3RM800-8
3RP075M-8	SDSn	75±20%	700	20	20	300	25	1.0	2.0	3RP075-8
3RP090M-8	SDSn	90±20%	700	20	20	300	50	1.0	2.0	3RP090-8
3RP150M-8	SDSn	150±20%	700	20	20	300	100	1.0	2.0	3RP150-8
3RP200M-8	SDSn	200±20%	700	20	20	300	100	1.0	2.0	3RP200-8
3RP230M-8	SDSn	230±20%	700	20	20	300	100	1.0	2.0	3RP230-8
3RP350M-8	SDSn	350±20%	850	20	20	300	100	1.0	2.0	3RP350-8
3RP400M-8	SDSn	400±20%	850	20	20	300	100	1.0	2.0	3RP400-8
3RP470M-8	SDSn	470±20%	950	20	20	300	250	1.0	2.0	3RP470-8
3RP600M-8	SDSn	600±20%	1300	20	20	300	250	1.0	2.0	3RP600-8
3RP800M-8	SDSn	800±20%	1500	20	20	300	250	1.0	2.0	3RP800-8

Notes: ① Specific code by request.

Electrical Ratings

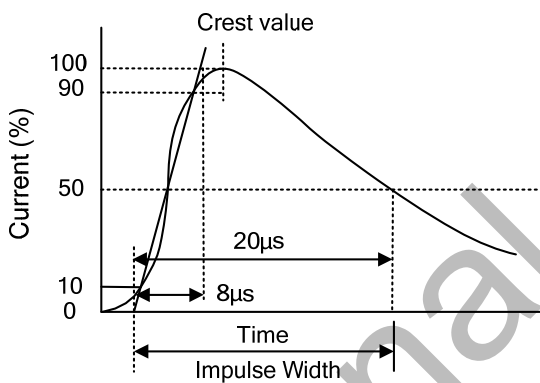Items	Test Condition/Description	Requirement
DC Spark-over Voltage	The voltage is measured with voltage ramp $dv/dt=100V/s$. Test is between each side electrode and center electrode.	
Maximum Impulse Spark-over Voltage	The maximum impulse spark-over voltage is measured with voltage ramp $dv/dt=1000V/\mu s$. Test is between each side electrode and center electrode.	
Impulse Discharge Current	<p>Maximum surge current that can be applied through center electrode with 8/20μs waveform, for 10 times with 3min interval time, which will be equally divided between each side electrode to center electrode, without causing the DC breakdown voltage to change more than 25% from its initial measured value.</p>  <p>The graph shows a current waveform starting at 0% at time 0. It rises to a crest value of 100% within 8μs. The current then decays, reaching 50% of the crest value at 20μs after the start of the impulse. The total duration of the impulse is labeled as 'Impulse Width'.</p>	To meet the specified value
Alternating Discharge Current	<p>Rated RMS value of AC current at 50Hz, 1 sec. for 10 times with interval time 3 min. DC spark-over voltage shall not change more than $\pm 25\%$ from its initial value. Test is between each side electrode and center electrode.</p> <p>$IR > 10^8$ ohms (-20%, +30% for 70~90V).</p>	
Insulation Resistance	The resistance of gas tube shall be measured between each side electrodes and center electrode.	
Capacitance	<p>The capacitance of gas tube shall be measured between each side electrodes and center electrode.</p> <p>Test frequency: 1MHz</p>	

Recommended Soldering Conditions

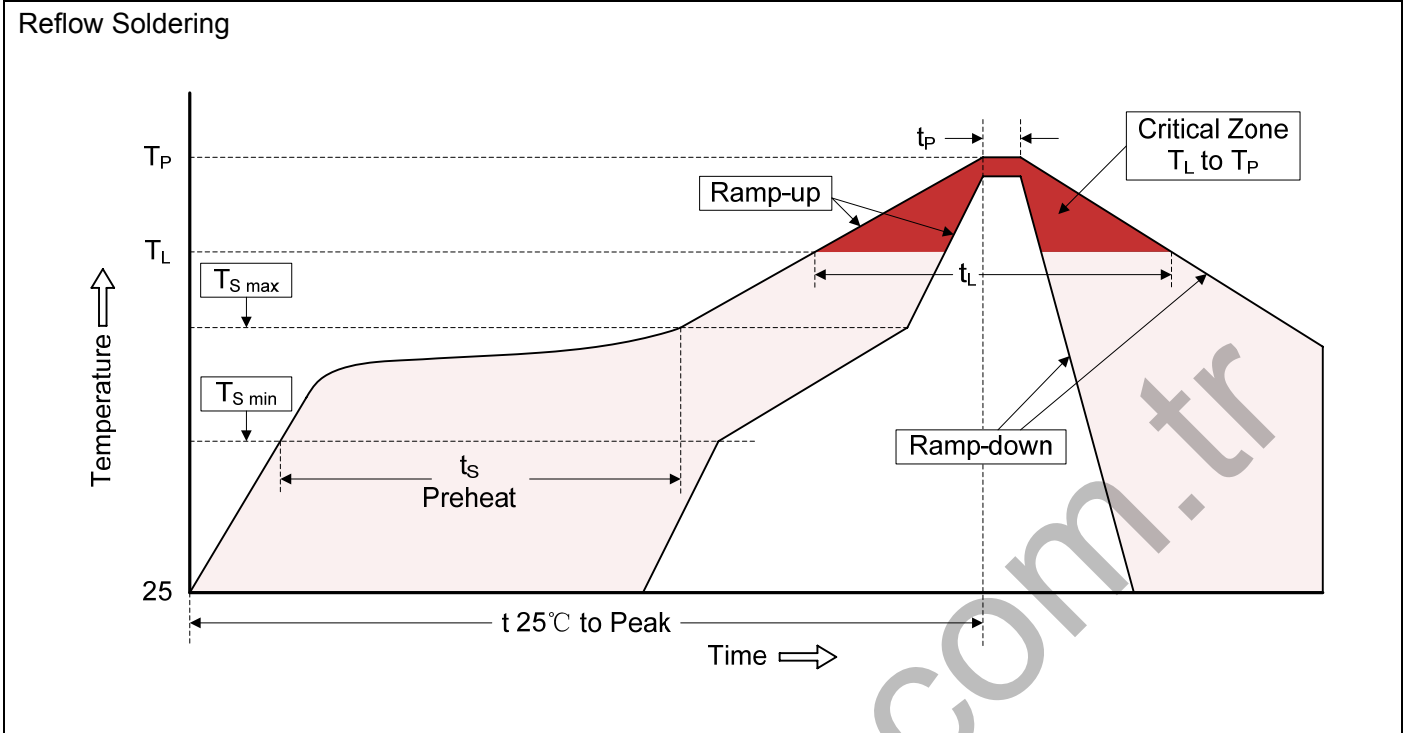

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat -Temperature Min ($T_{S\ min}$) -Temperature Max ($T_{S\ max}$) -Time (min to max) (t_s)	150°C 200°C 60-180 seconds
$T_{S\ max}$ to T_L -Ramp-up Rate	3°C/second max.
Time maintained above: -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

Packaging

Tape	Items	Dimension (mm)	
		Spec.	Tolerance
	W	16.00	±0.20
	P0	4.00	±0.10
	P1	16.00	±0.10
	P2	2.00	±0.10
	D0	1.55	±0.05
	E	1.75	±0.10
	F	7.50	±0.10
	A0	11.60	±0.10
	K0	8.90	±0.10
	B0	8.60	±0.10
	B1	10.00	±0.10
	t0	0.50	±0.05
	D	330.00	±1.00
	d	13.00	±0.50
	L	20.00	±0.50
	t	2.00	±0.20
	Quantity: 300pcs		