

LARGE CAN TYPE

HF Series

JAMICON®

- Withstanding 7000 hours application of high ripple current at 105°C.




● SPECIFICATION


Item	Characteristic						
Operation Temperature Range	-40 ~ +105°C						
Rated Working Voltage	160 ~ 450VDC						
Capacitance Tolerance (120Hz 20°C)	±20%(M)						
Leakage Current (20°C)	$I \leq 0.02CV$ or 3 (mA) *Whichever is smaller after 5 minutes I : Leakage Current(µA) C : Rated Capacitance(µF) V : Working Voltage(V)						
Surge Voltage (20°C)	W.V.	160	200	250	350	400	450
	S.V.	200	250	300	400	450	500
Dissipation Factor (tan δ) (120Hz 20°C)	Rated Voltage	160	200	250	350	400	450
	tan δ	0.15	0.15	0.15	0.15	0.15	0.15
Low Temperature Stability	Impedance ratio at 120Hz						
	Rated Voltage	160 ~ 250V			350 ~ 450V		
	-25°C / +20°C	4			6		
Load Life	After 7000 hours application of W.V. and +105°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage ≤ rate working voltage)						
	Capacitance Change	≤ ±20% of initial value					
	Dissipation Factor	≤ 175% of initial specified value					
	Leakage current	≤ initial specified value					
Shelf Life	At +105°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)						

● TERMINAL TYPE



▲ P.C.B. TERMINAL (SNAP IN) SYMBOL:W(φ22~35)

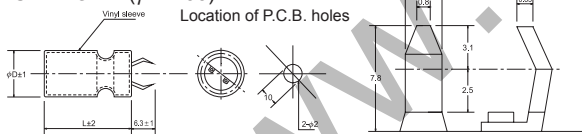



▲ LUG TERMINAL SYMBOL:G(φ22~35)

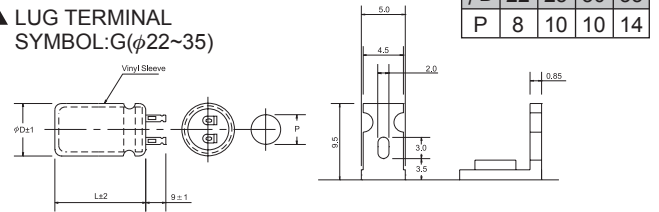

▲ P.C.B. TERMINAL SYMBOL:V(φ25~35)

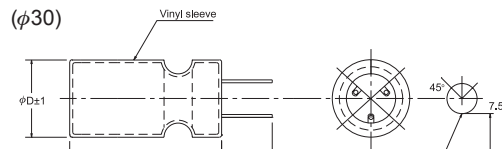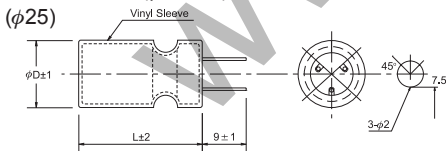

▲ P.C.B. TERMINAL SYMBOL:A(φ25~35)

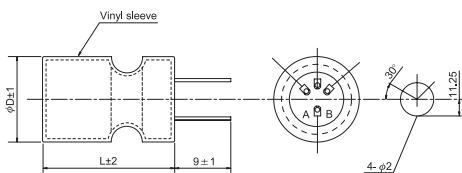

● RIPPLE CURRENT COEFFICIENTS

Temperature(°C)	40	60	70	85	105
Multiplier	2.50	2.20	2.00	1.80	1.00

Frequency(Hz)	60	120	400	1k	10k
W.V.	Multiplier				
≥160V	0.80	1.00	1.10	1.30	1.40

