
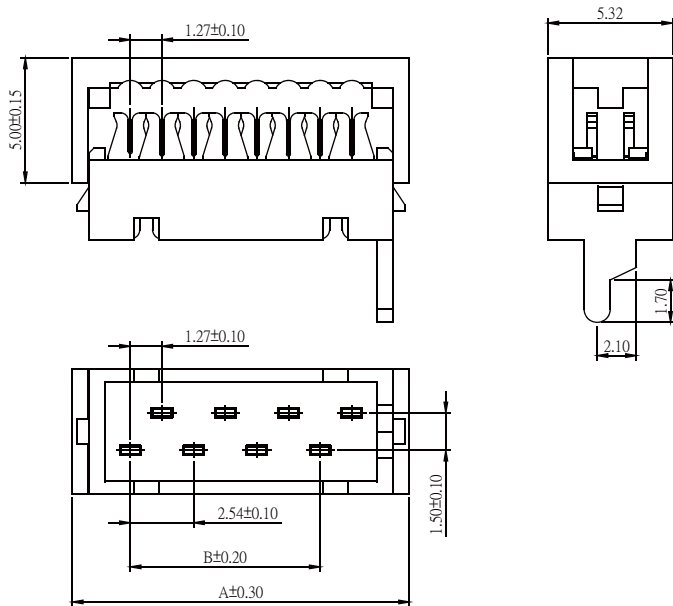


## Mini Match Box Plug IDC Type

**Specifications**  
 Current Rate: 1.0 AMP  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 20mΩ Max  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

**Material**  
 Insulator: Polyester, UL 94V-0  
 ©Standard: P.B.T  
 Terminal: Copper Alloy



©Mate with flat cable Pitch 1.27 mm



No. of Contacts	Dim. A	Dim. B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

Part No.: MIBPI3-XX-L

## Mini Match Dip Plug IDC Type

**Specifications**  
 Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 20mΩ Max  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -25°C to +85°C

**Material**  
 Insulator: Polyester, UL 94V-0  
 ©Standard: P.B.T  
 Terminal: Copper Alloy

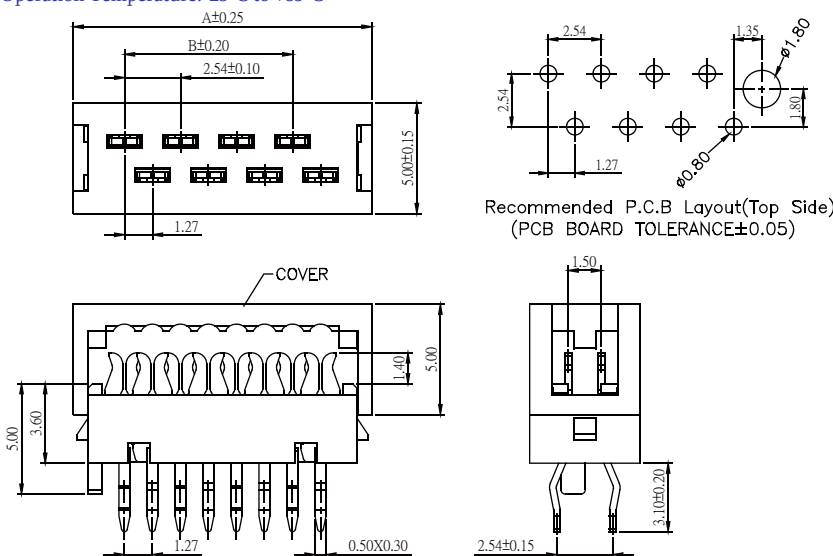

©Mate with flat cable Pitch 1.27 mm

No. of Contacts	Dim. A	Dim. B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

Part No.: MIDPI3-XX-L

## ORDER INFORMATION

