






CONNECTORS MANUFACTURER

MMCX Conn. Series


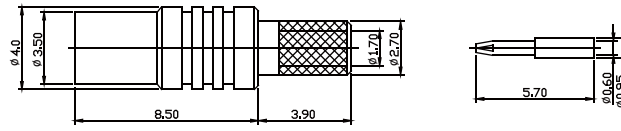


4	FERRULE	BRASS	GOLD	1
3	CENTER CONTACT	BRASS	GOLD	1
2	INSULATOR	TEFLON		1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY



IMPEDANCE	50 OHM
FREQUENCY	0-6.0 GHz
DIELECTRIC WITHSTANDING VOLTAGE	500 VRMS MIN
VOLTAGE RATING	170 VRMS MAX.
CONTACT RESISTANCE	INNER CONDUCTOR = 5.0 MILLIOHMS OUTER CONDUCTOR = 2.5 MILLIOHMS



Part No.:MMCX003-F GW-L
5:50 Ω 7:75 Ω

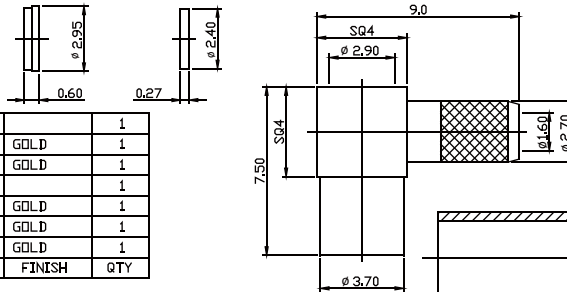

7	DIELECTRIC	DEL RIN		1
6	STOPPLE	BRASS	GOLD	1
5	FERRULE	BRASS	GOLD	1
4	DIELECTRIC	TEFLON		1
3	PIN	BRASS	GOLD	1
2	BODY	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

IMPEDANCE	50 OHM
FREQUENCY	0-6.0 GHz
DIELECTRIC WITHSTANDING VOLTAGE	500 VRMS MIN
VOLTAGE RATING	170 VRMS MAX.
CONTACT RESISTANCE	INNER CONDUCTOR = 5.0 MILLIOHMS OUTER CONDUCTOR = 2.5 MILLIOHMS



Part No.:MMCX004-F GW-L
5:50 Ω 7:75 Ω

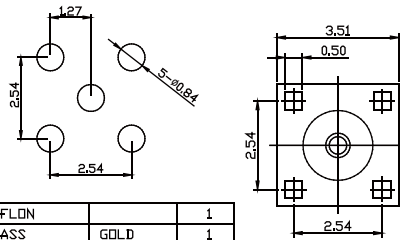

3	DIELECTRIC	TEFLON		1
2	PIN	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

IMPEDANCE	50 OHM
FREQUENCY	0-6.0 GHz
DIELECTRIC WITHSTANDING VOLTAGE	500 VRMS MIN
VOLTAGE RATING	170 VRMS MAX.
CONTACT RESISTANCE	INNER CONDUCTOR = 5.0 MILLIOHMS OUTER CONDUCTOR = 2.5 MILLIOHMS

Part No.:MMCX005-F GW-L
5:50 Ω 7:75 Ω

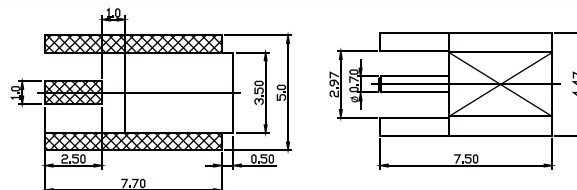

3	DIELECTRIC	TEFLON		1
2	PIN	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

IMPEDANCE	50 OHM
FREQUENCY	0-6.0 GHz
DIELECTRIC WITHSTANDING VOLTAGE	500 VRMS MIN
VOLTAGE RATING	170 VRMS MAX.
CONTACT RESISTANCE	INNER CONDUCTOR = 5.0 MILLIOHMS OUTER CONDUCTOR = 2.5 MILLIOHMS

Part No.:MMCX006-F GW-L
5:50 Ω 7:75 Ω

M MCX Conn.

Pb

ROHS