

RADIAL TYPE


NS

Series

7mmL 85°C, Non Polarity

JAMICON®

- Non polarity series with 7mm height.




● SPECIFICATION

Item	Characteristic							
Operation Temperature Range	-40 ~ +85°C							
Rated Working Voltage	6.3 ~ 50VDC							
Capacitance Tolerance (120Hz 20°C)	±20%(M)							
Leakage Current (20°C)	I ≤ 0.05CV or 10 (μA) *Whichever is greater after 2 minutes				I : Leakage Current (μA) C : Rated Capacitance (μF) V : Working Voltage (V)			
Surge Voltage (20°C)	W.V.	6.3	10	16	25	35	50	
	S.V.	8	13	20	32	44	63	
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	6.3	10	16	25	35	50	
	tan δ	0.24	0.20	0.17	0.15	0.12	0.12	
Low Temperature Stability	Impedance ratio at 120Hz							
	Rated Voltage (V)	6.3	10	16	25	35	50	
	-25°C / +20°C	4	3	2	2	2	2	
	-40°C / +20°C	10	8	6	4	3	3	
Load Life	After 1000 hours application of W.V. and +85°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage ≤ rate working voltage) (The polarity need to exchange every 250 hours)							
	Capacitance Change	≤ ±20% of initial value						
	Dissipation Factor	≤ 150% of initial specified value						
	Leakage current	≤ initial specified value						
Shelf Life	At +85°C no voltage application after 500 hours the capacitor shall meet the following limits. (with voltage treatment)							
	Capacitance Change	≤ ±20% of initial value						
	Dissipation Factor	≤ 200% of initial specified value						
	Leakage current	≤ 200% of initial specified value						

● DIMENSIONS (mm)

φD	4	5	6.3	8
F	1.5	2.0	2.5	3.5
d	0.45	0.45	0.45	0.5
α	1.0	1.0	1.0	1.0

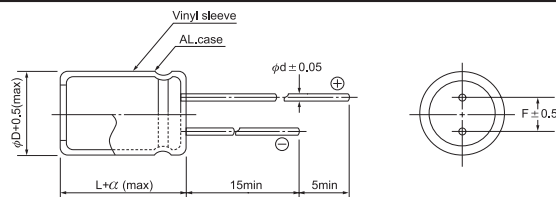

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
Max ripple current : mA(rms) 85°C 120Hz

μF	V(Code) Code	Item	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)		
			DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	
0.1	0R1										→	4x7	3		
0.22	R22										→	4x7	4		
0.33	R33										→	4x7	5		
0.47	R47										→	4x7	6		
1.0	010										→	4x7	9		
2.2	2R2								→	4x7	14	5x7	16		
3.3	3R3							→	4x7	15	5x7	19	5x7	19	
4.7	4R7						→	4x7	17	5x7	20	5x7	23	6.3x7	26
10	100		→	4x7	23	5x7	28	6.3x7	34	6.3x7	38	8x7	44		
22	220	5x7	35	5x7	38	6.3x7	47	6.3x7	50	8x7	65	8x7	65		
33	330	5x7	43	6.3x7	55	6.3x7	60	8x7	70	8x7	80				
47	470	6.3x7	60	6.3x7	65	6.3x7	70	8x7	85						
100	101	8x7	100	8x7	110	8x7	120								

All blank voltage on sleeve marking is the same voltage as " → "point to.