



Opto Plus LED Corp.
2.0" 5 x 7 Dot Matrix LED Display
OPD-M55710E-GW
OPD-M55711E-GW

● **FEATURES**

- 2.0 inch (50.72 mm) Matrix Height.
- Stackable vertically and horizontally.
- 5 x 7 array with X-Y select.
- Wide viewing angle.
- Gray face, White dot.
- Case mold type.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The OPD-M55710E-GW & OPD-M55711E-GW is a 2.0 inch (50.72 mm) 5 x 7 dot matrix display.

This device utilizes Red LED chip which are made from GaAsP on a transparent GaP substrate. The display has Gray face, White dot.

● **DEVICE**

PART NO Red	DESCRIPTION
OPD-M55710E-GW	Anode Column Cathode Row
OPD-M55711E-GW	Anode Row Cathode Column

RoHS Compliance




Pb free.





Opto Plus LED Corp.
2.0" 5 x 7 Dot Matrix LED Display
OPD-M55710E-GW
OPD-M55711E-GW

● **MECHANICAL DIMENSIONS**

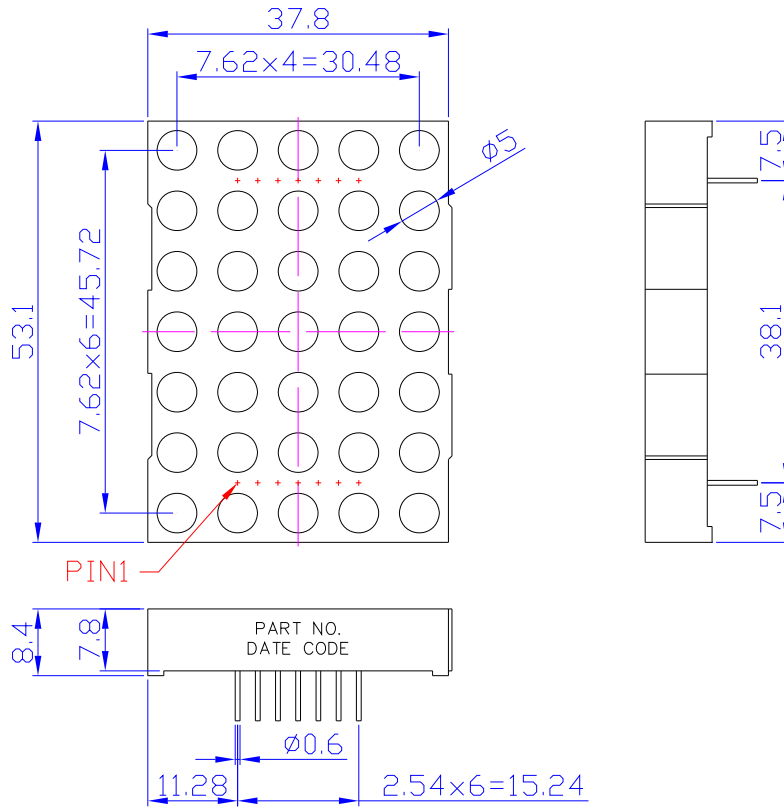

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

● **TYPICAL INTERNAL EQUIVALENT CIRCUIT**






Opto Plus LED Corp.

2.0" 5 x 7 Dot Matrix LED Display

OPD-M55710E-GW

OPD-M55711E-GW

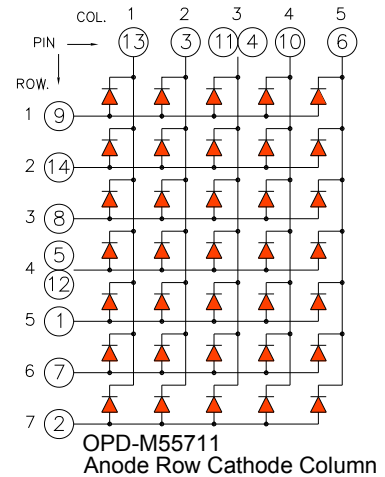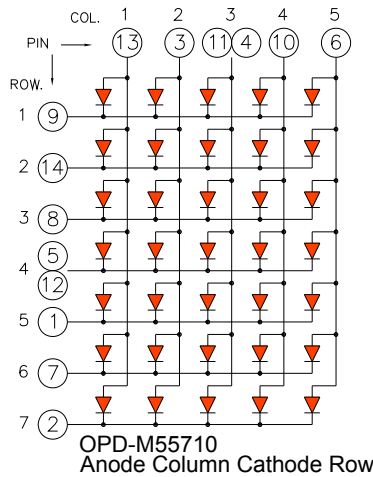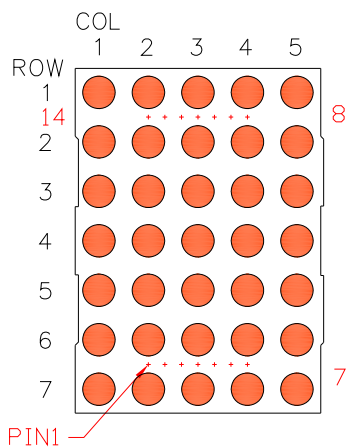

● **E: RED (GaAsP/GaP)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Red	Unit
Power dissipation per dice	P _{AD}	70	mW
Derating Liner from 25°C per dice	-	0.28	mA/°C
Continuous forward current per dice	I _{AF}	25	mA
Peak current per dice (duty cycle 1/10, 1kHz)	I _{PF}	90	mA
Reverse voltage per dice	V _R	5	V
Operating temperature	T _{OPR}	-25 to +85	°C
Storage temperature	T _{STG}	-25 to +85	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C



Opto Plus LED Corp.
2.0" 5 x 7 Dot Matrix LED Display
OPD-M55710E-GW
OPD-M55711E-GW

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V_F	$I_F = 20\text{mA}$	-	2.0	2.6	V
Reverse current	I_R	$V_R = 5\text{V}$	-	-	10	μA
Peak wavelength	λ_P	$I_F = 20\text{mA}$	-	632	-	nm
Dominant wavelength	λ_D	$I_F = 20\text{mA}$	-	620	-	nm
Luminous intensity	I_V	$I_F = 20\text{mA}$	-	15	-	mcd
Spectral radiation bandwidth	$\Delta\lambda$	$I_F = 20\text{mA}$	-	35	-	nm

● **E: RED (GaAsP/GaP) CURVE**

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)



Opto Plus LED Corp.

2.0" 5 x 7 Dot Matrix LED Display

OPD-M55710E-GW

OPD-M55711E-GW

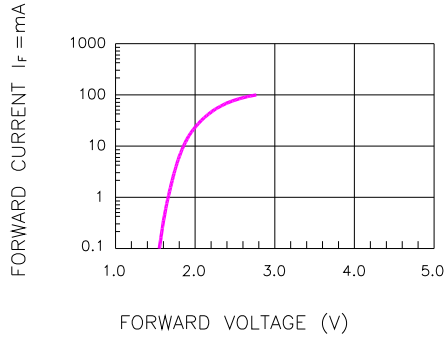


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

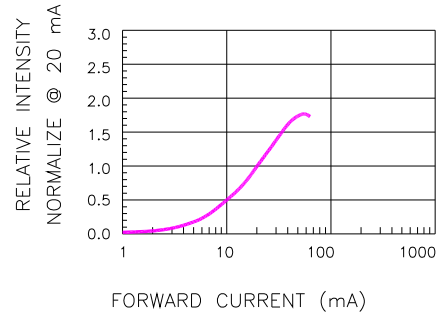


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

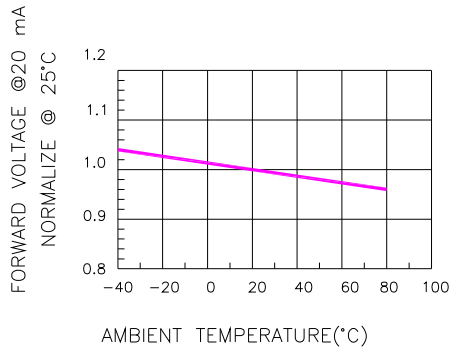


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

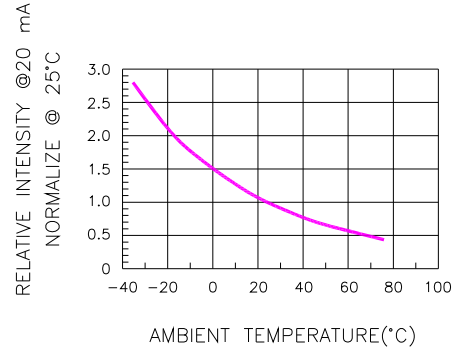


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

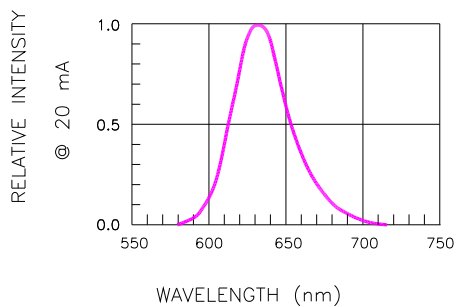


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

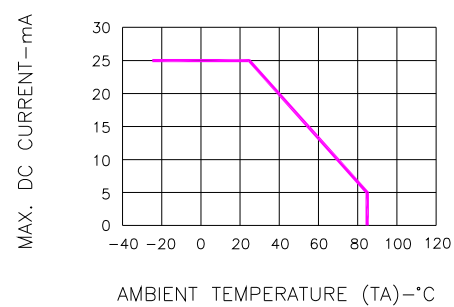



Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

● RECOMMEND SOLDERING PROFILE



Opto Plus LED Corp.
2.0" 5 x 7 Dot Matrix LED Display
OPD-M55710E-GW
OPD-M55711E-GW

WAVE SOLDER PROFILE

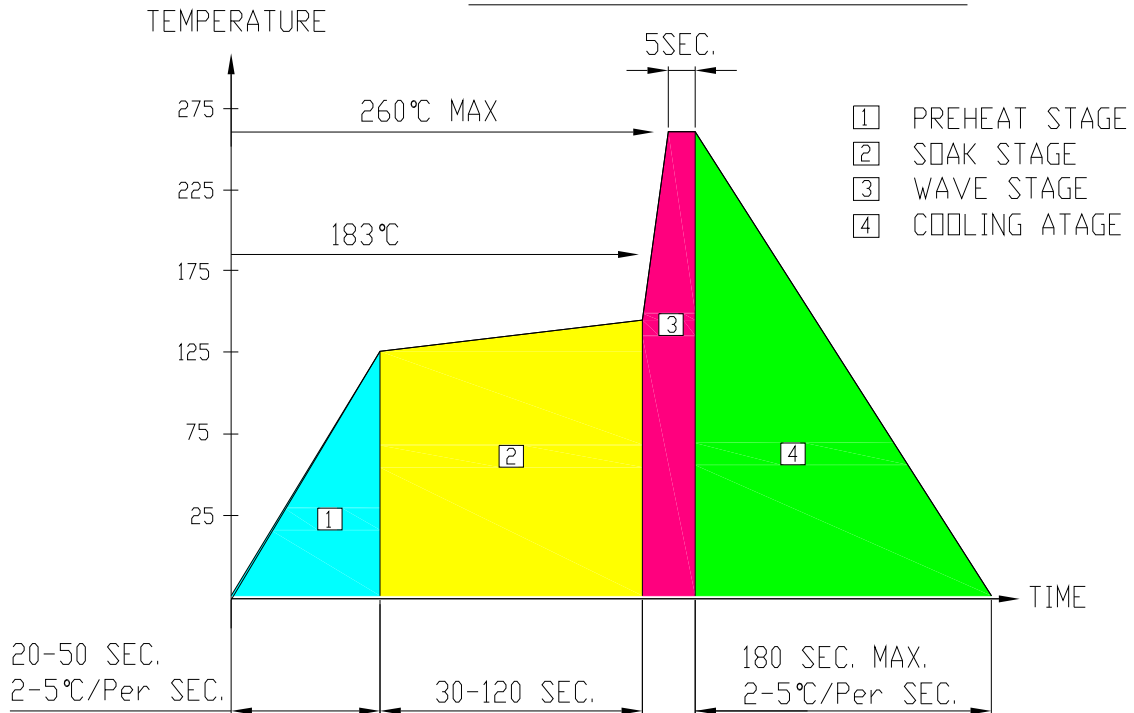

● **SOLDERING IRON**

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C→1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

Customer must finish rework within ≤ 4 sec under 245°C.