



# CONNECTORS MANUFACTURER

## Pin Header 2.54mm SMT / Stack SMT / SMT R/A / Mixed Technology Pin Type


### Specifications

Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -40°C to +105°C



### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated

## ORDER INFORMATION


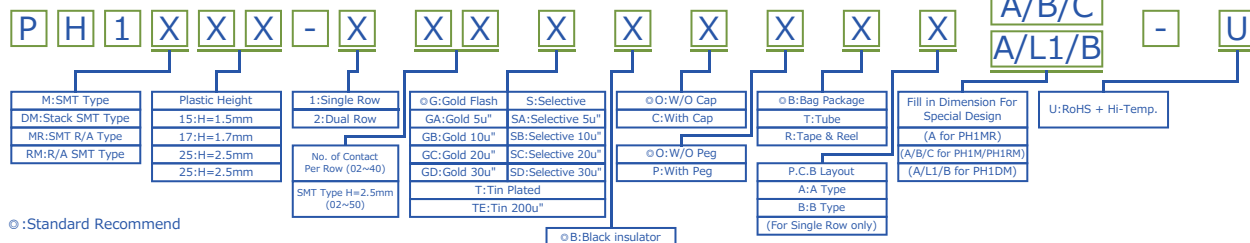


## Pin Header 2.54mm 1 Row H=1.5/1.7/2.5mm SMT / Stack SMT Type

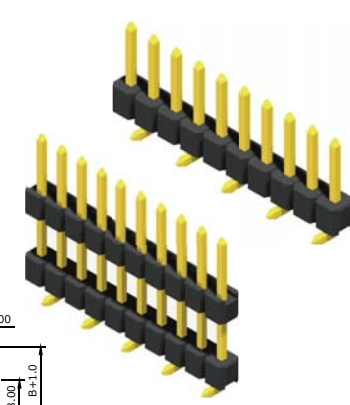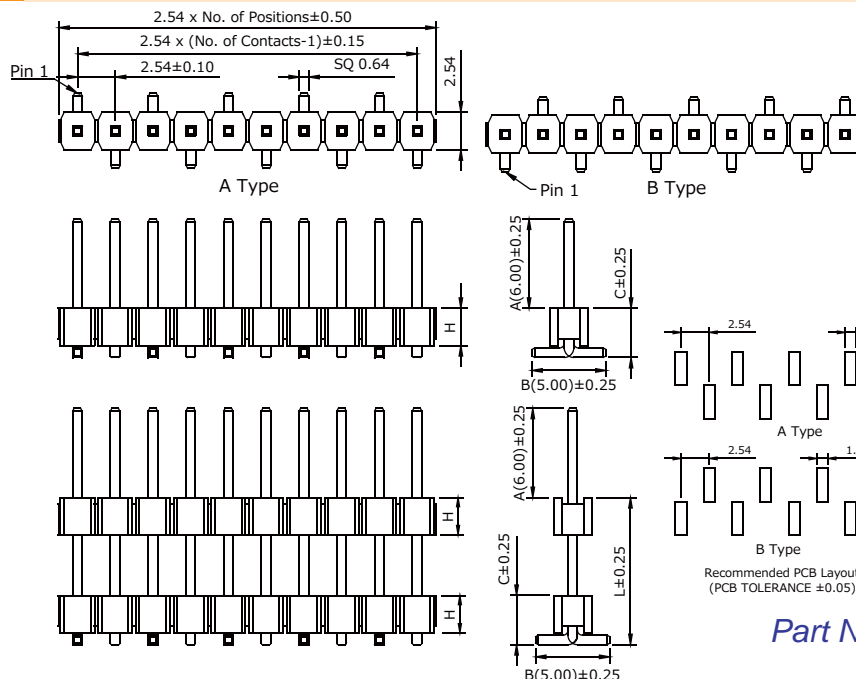

Part No.: PH1M15/17/25-1XX-U  
 PH1DM15/17/25-1XX-U

## Pin Header 2.54mm 2 Row H=1.5/1.7/2.5mm SMT / Stack SMT Type

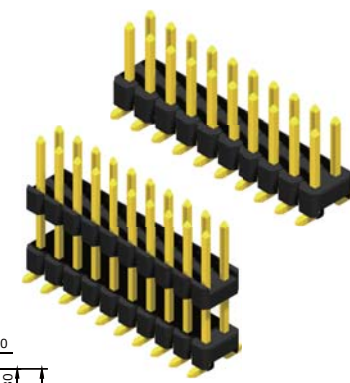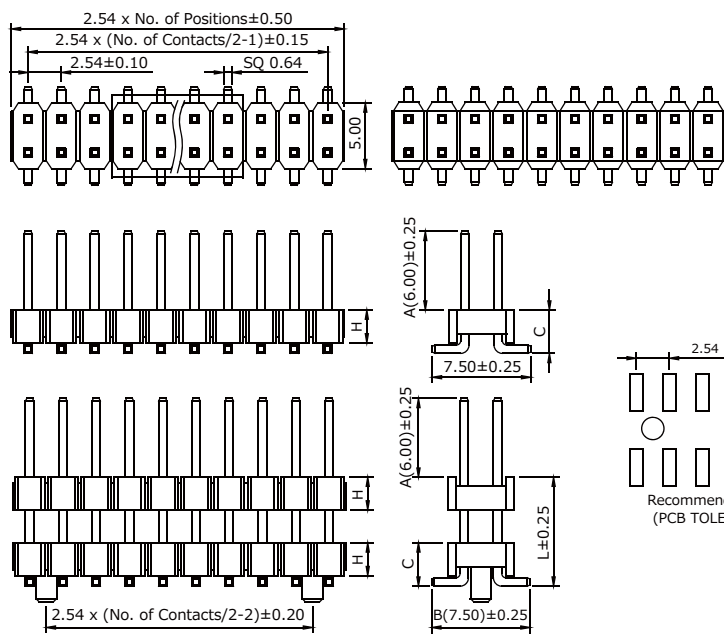

Part No.: PH1M15/17/25-2XX-U  
 PH1DM15/17/25-2XX-U

Pin Header 2.54mm

ROHS

AMTEK CONNECTOR MANUFACTURING