



Pin Header 2.54mm Right Angle / Stack Right Angle Type


Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C












Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

ORDER INFORMATION

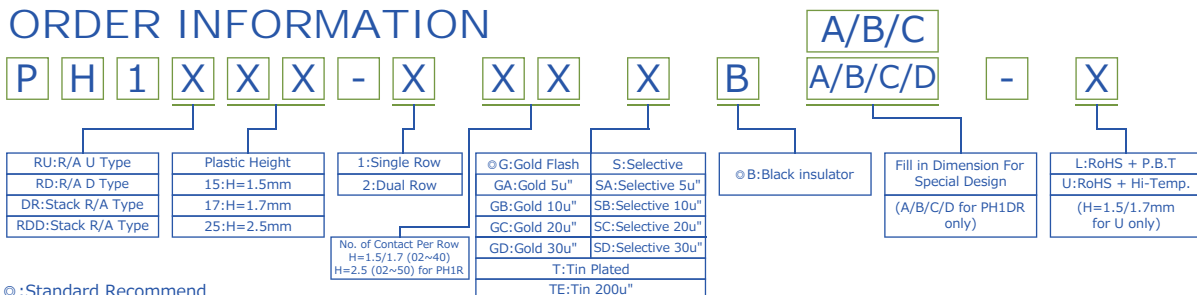

Pin Header 2.54mm 1 & 2 Row H=1.5/1.7/2.5mm Right Angle Type

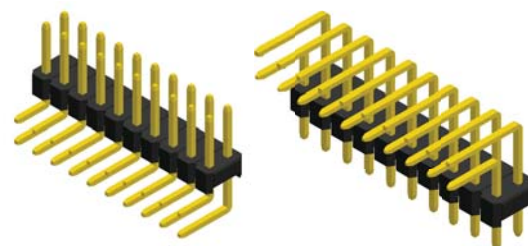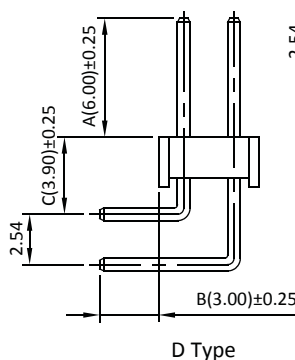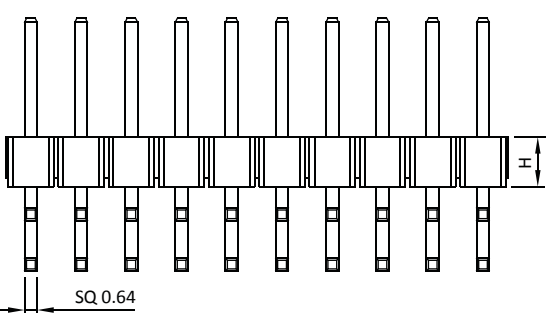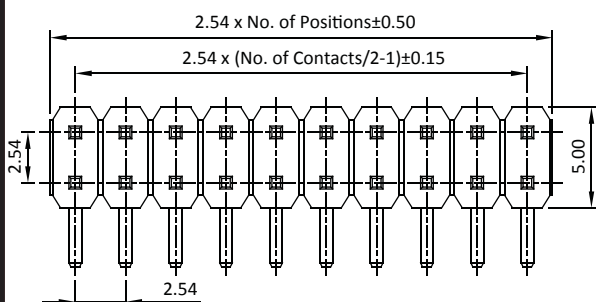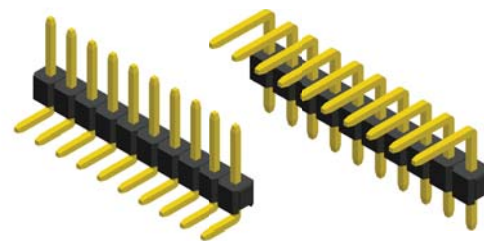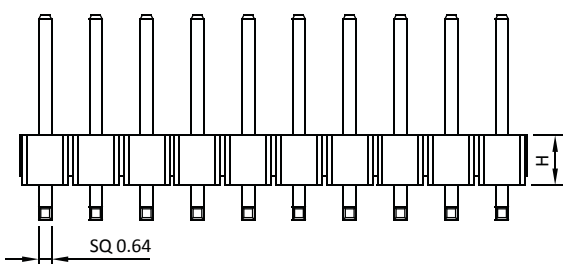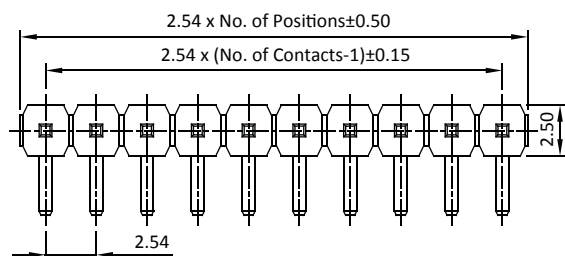

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

⊙: Standard Dimensions

Dimensions		
A	B	C
3.50	3.30	3.90
6.00	3.00	3.90
9.90	3.30	3.90

Part No.: PH1RD/U15/17/25-1/2XX-L/U

Pin Header 2.54mm

ROHS

CONNECTOR MANUFACTURER