



Pin Header 2.54mm Right Angle / Straight / Eccentric R/A / C / U Type

Specifications

Current Rate: 3 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 1000V AC for one minute

Operation Temperature: -40°C to +105°C


Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0


Terminal: Copper Alloy

Plating: Gold Plated


ORDER INFORMATION

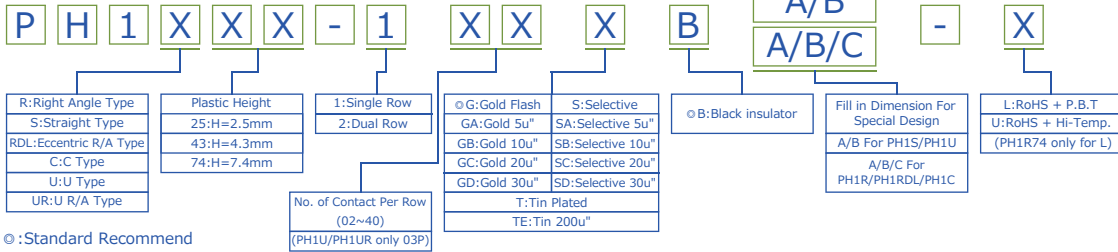

Pin Header 2.54mm 2 Row H=4.3mm Right Angle / Straight Type

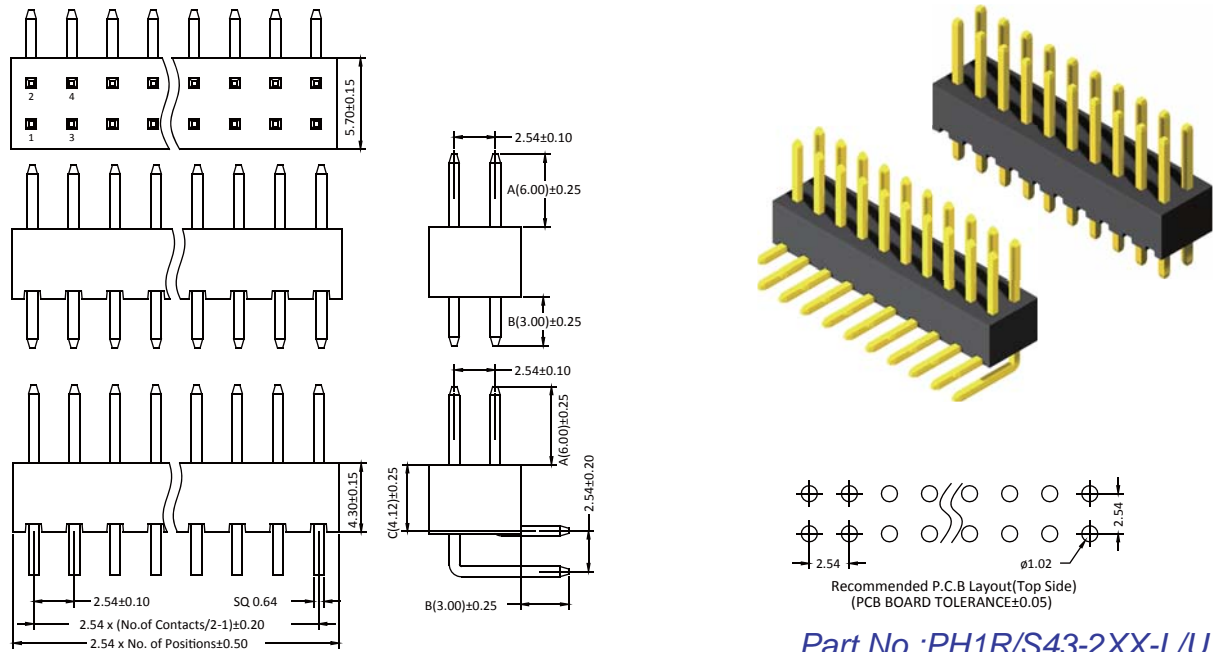

Pin Header 2.54mm 2 Row H=7.4mm Right Angle / Straight Type

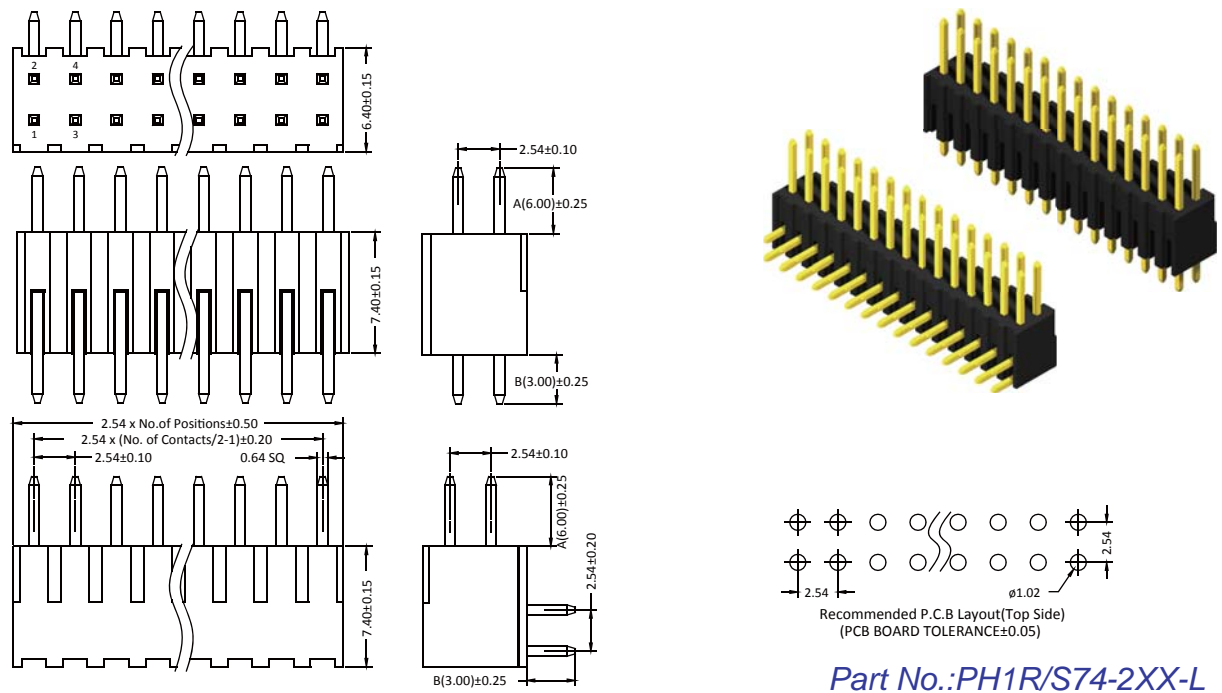

P in Header 2.54mm



ROHS

AMTEK CONNECTOR MANUFACTURER