



CONNECTORS MANUFACTURER

Pin Header 3.96mm SMT / Stack SMT / Right Angle / Straight / Stack Straight Type

Specifications

Current Rate:7 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C

Material


Insulator:Polyster,UL 94V-0

Standard:LCP









Terminal:Copper Alloy

Plating:Tin Plated

ORDER INFORMATION

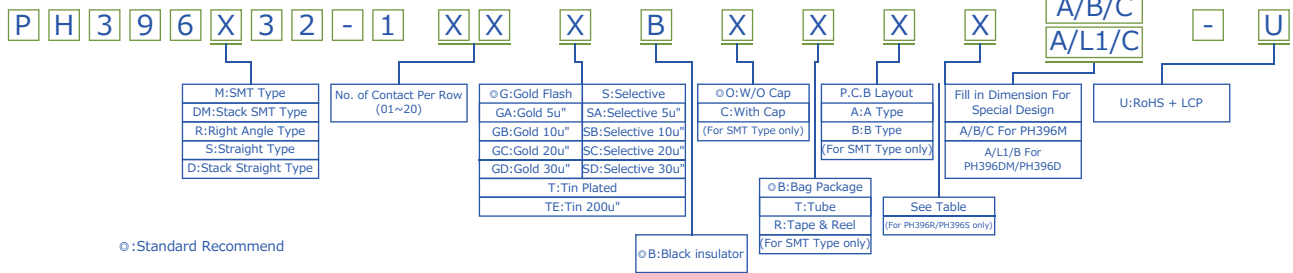

Pin Header 3.96mm 1 Row H=3.2mm SMT / Stack SMT Type

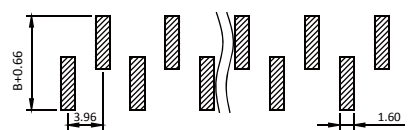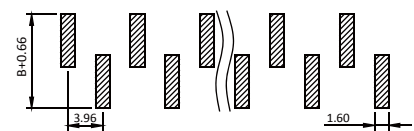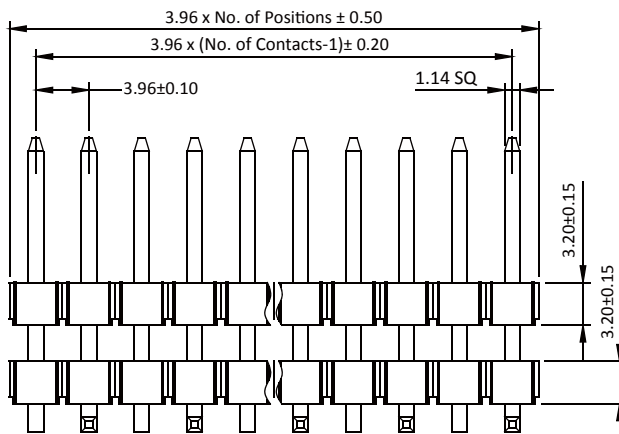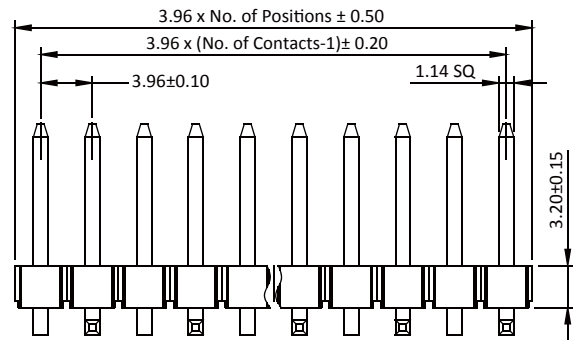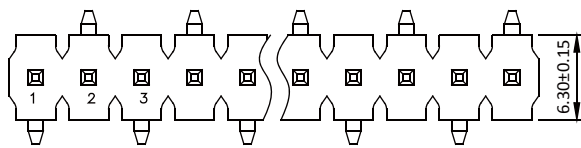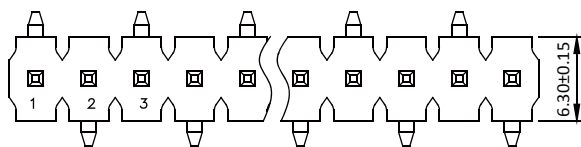

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

Part No.: PS396M32-1XX-U
PS396DM32-1XX-U

P in Header 3.96mm



ROHS

COMMUNICATION MANUFACTURING