




CONNECTORS MANUFACTURER

Pin Header 1.27mm SQ Pin=0.4/0.46mm H=2.5mm SMT R/A Type



Specifications
 Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

ORDER INFORMATION


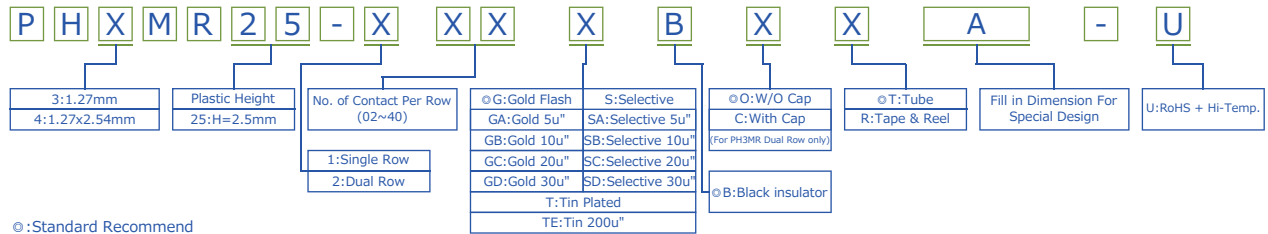


Pin Header 1.27mm SQ Pin=0.4mm 1 & 2 Row H=2.5mm SMT R/A Type

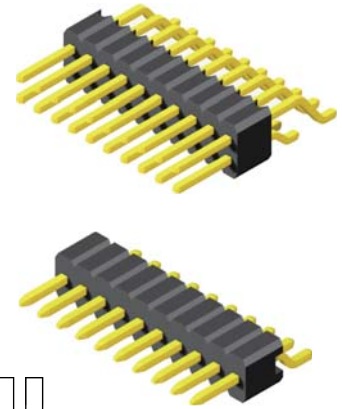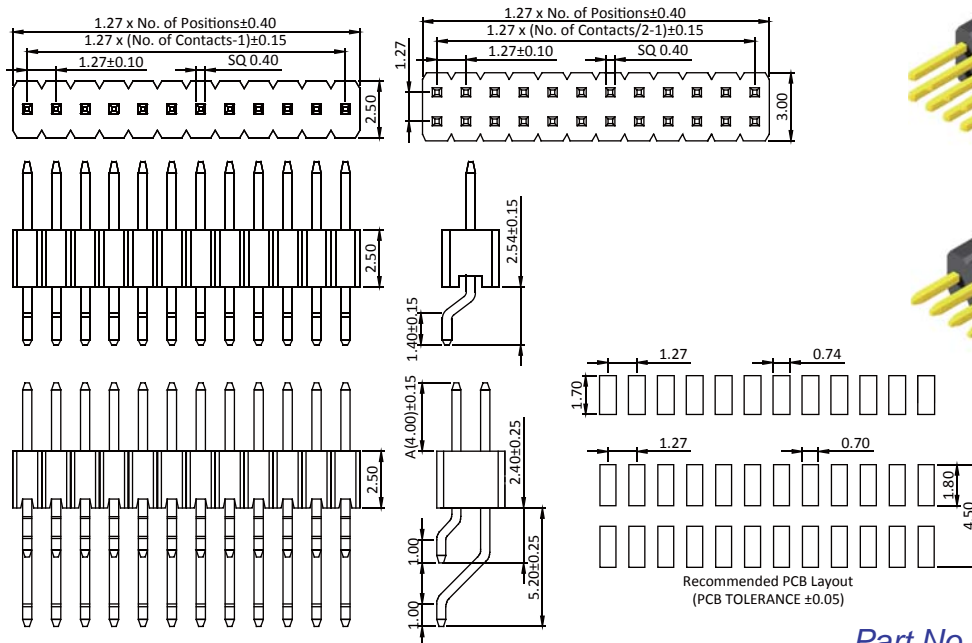

Part No.:PH3MR-1/2XX-U

Pin Header 1.27mm SQ Pin=0.46mm 1 & 2 Row H=2.5mm SMT R/A Type

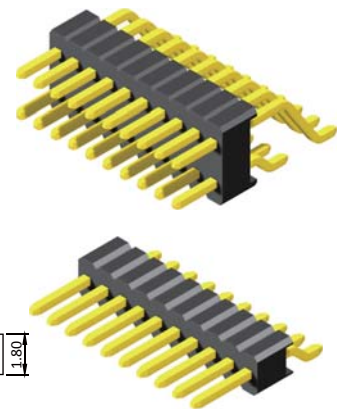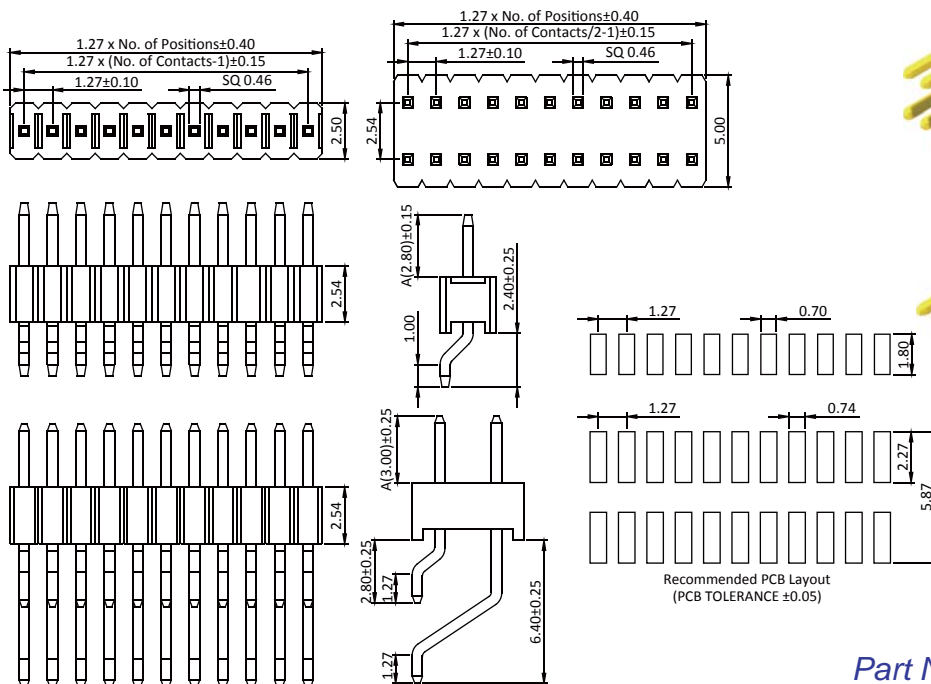

Part No.:PH4MR-1/2XX-U

P in Header 1.27mm



ROHS

CONNECTOR MANUFACTURER