

Pin Header 1.27mm SQ Pin=0.46mm 1 & 2 Row SMT / Stack SMT Type


Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated


ORDER INFORMATION

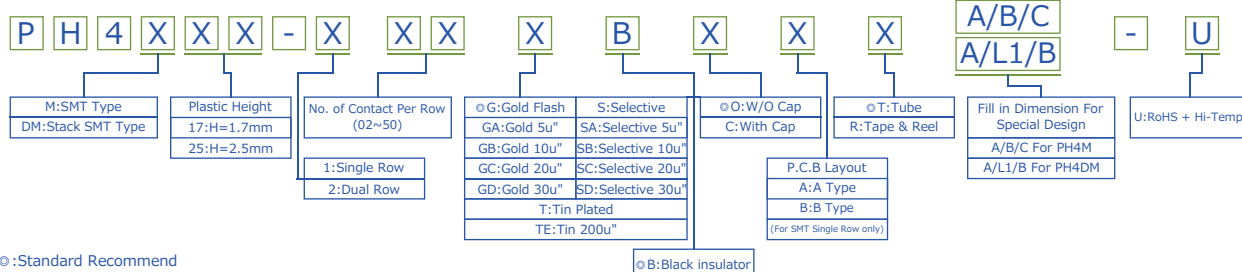

○: Standard Recommend

○ B: Black insulator

Pin Header 1.27mm SQ Pin=0.46mm 1Row H=1.7/2.5mm SMT / Stack SMT Type

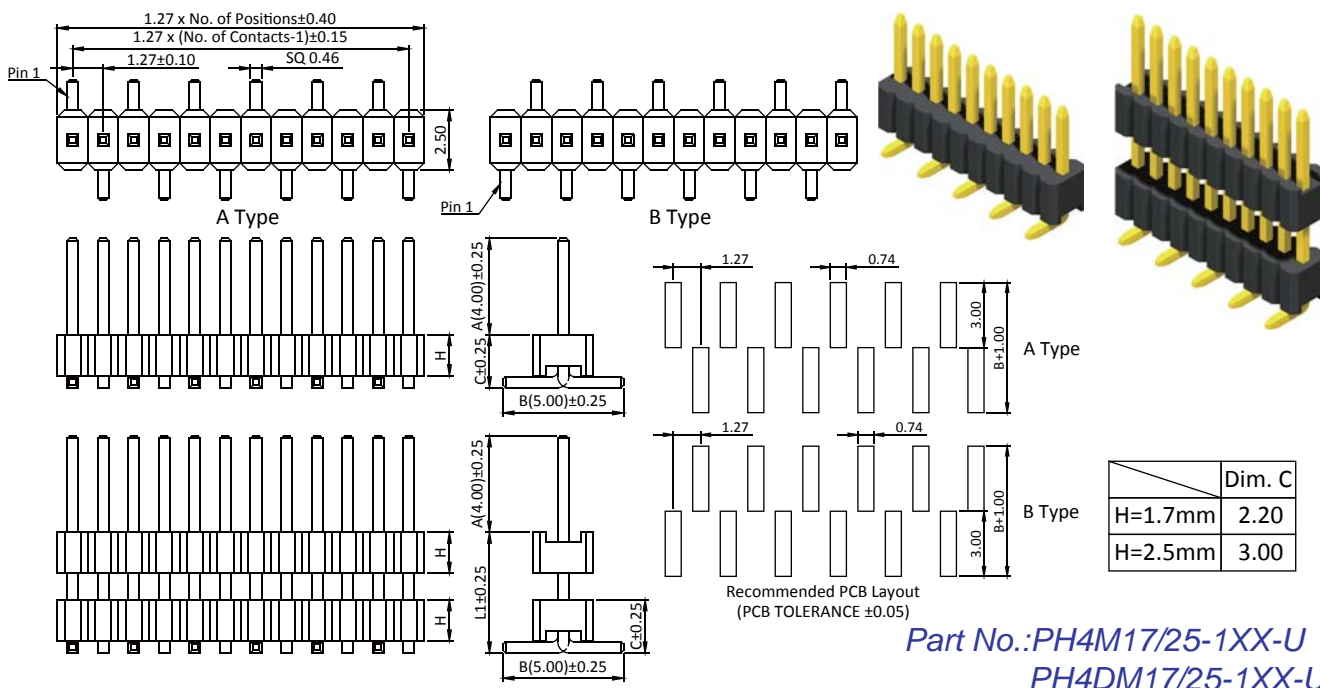

Pin Header 1.27mm SQ Pin=0.46mm 2 Row H=1.7/2.5mm SMT / Stack SMT Type

