



Pin Header 0.8mm SMT / Stack SMT / SMT R/A / Straight / Stack Straight Type


Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C



Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

ORDER INFORMATION

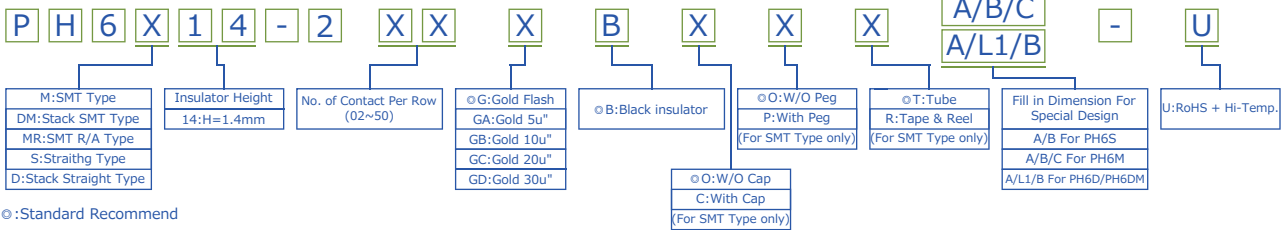

Pin Header 0.8mm 2 Row H=1.4mm SMT & Stack SMT Type

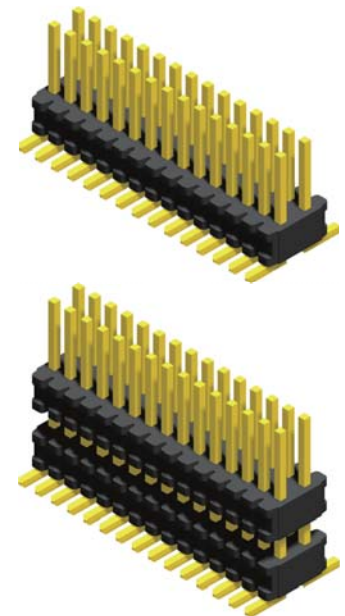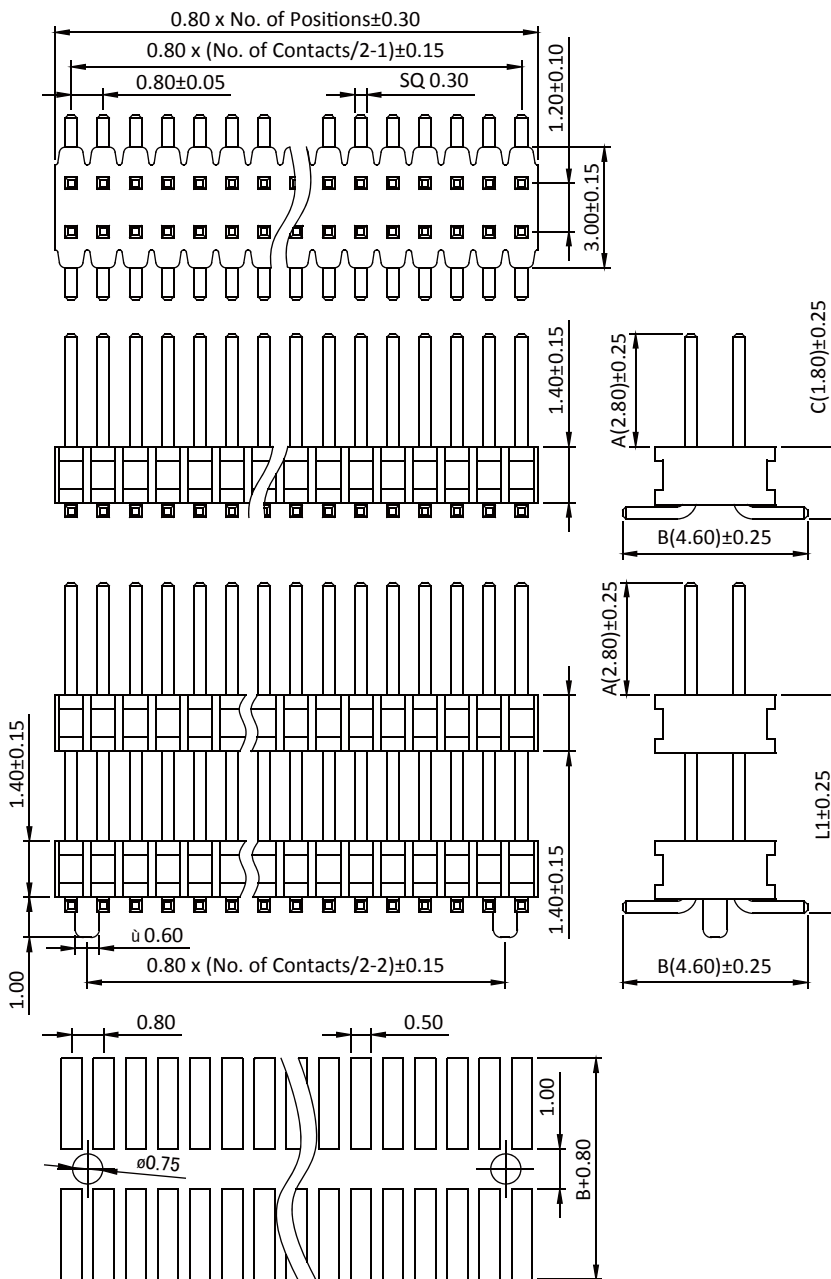

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Part No.: PH6M14-2XX-U
 PH6DM14-2XX-U

Pin Header 0.8mm



ROHS