



Female Header 2.54mm SMT Type


Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated


ORDER INFORMATION

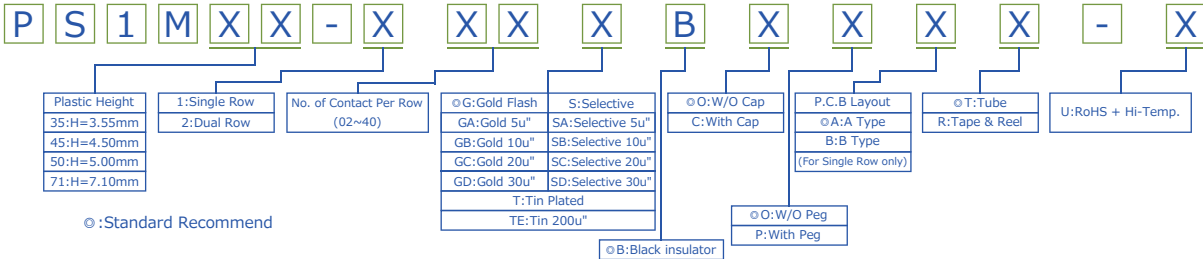

Female Header 2.54mm 1 & 2 Row H=3.55mm SMT Type

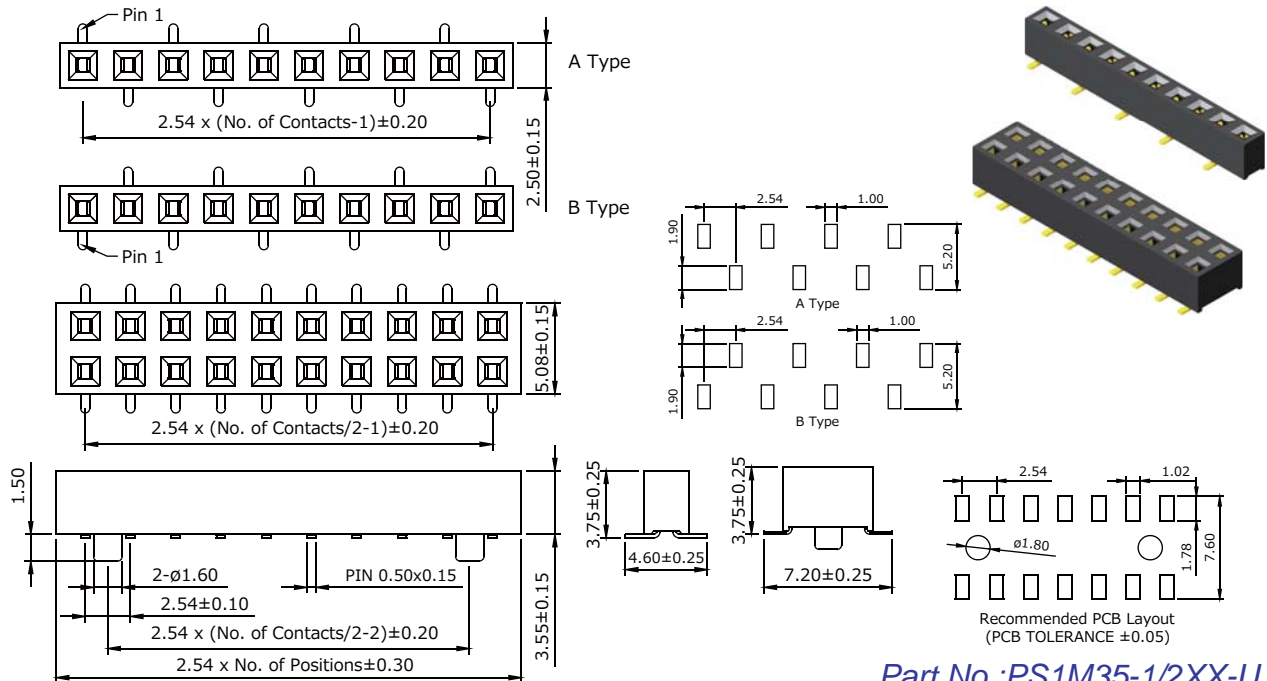

Female Header 2.54mm 1 & 2 Row H=4.5mm SMT Type

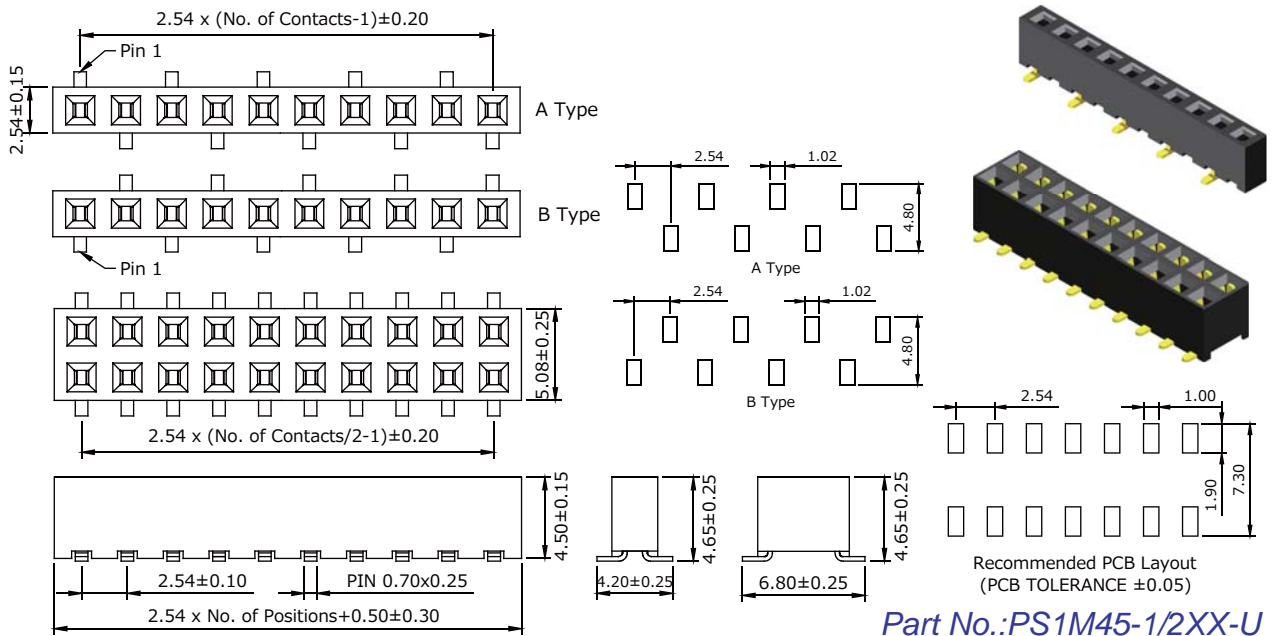

F

Female Header 2.54mm

Pb

ROHS

AMTEK CONNECTOR MANUFACTURING