



Female Header 2.0mm 1 & 2 & 3 & 4 Row Elevated Straight Type


Specifications

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C



Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

ORDER INFORMATION


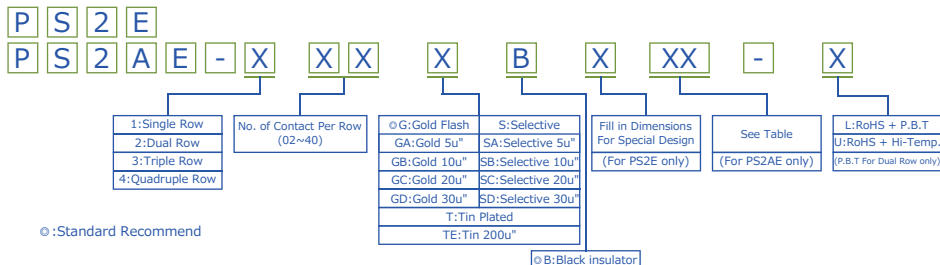


Female Header 2.0mm 2 & 4 Row Elevated Straight Type

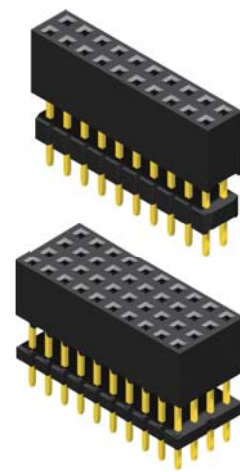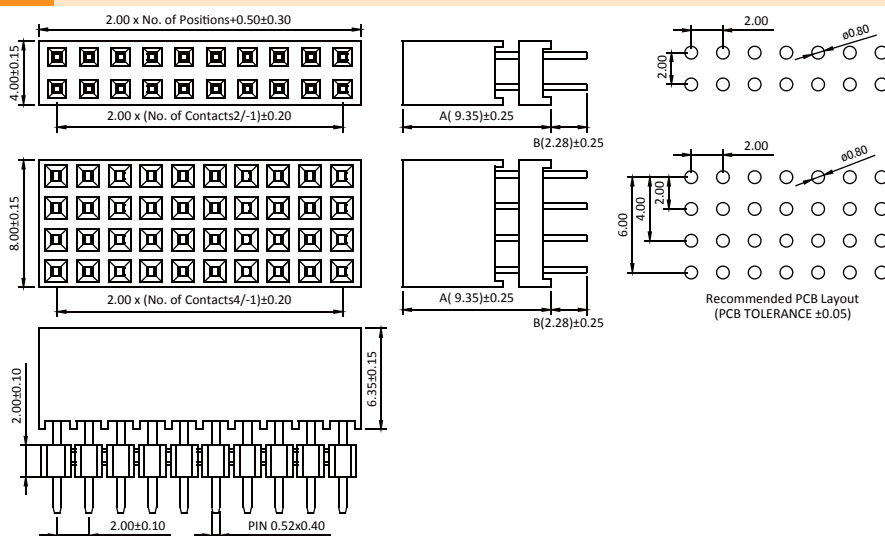

Part No.: PS2E-2/4XX-L/U

Female Header 2.0mm 1 & 2 & 3 & 4 Row Elevated Straight Type

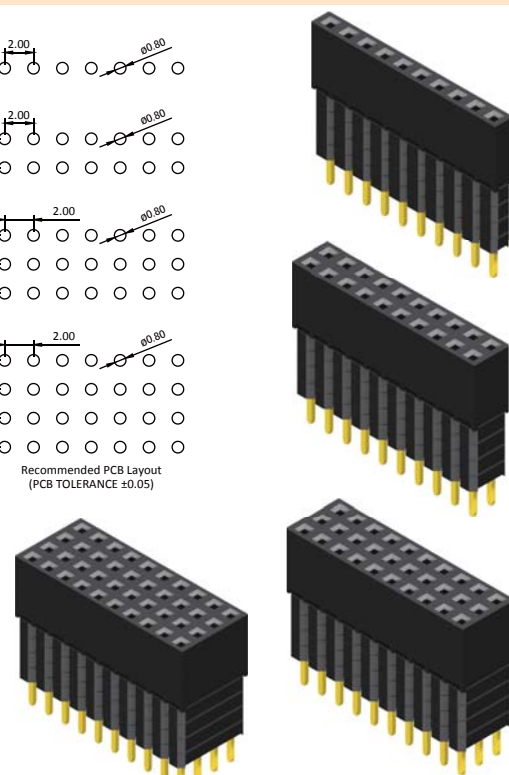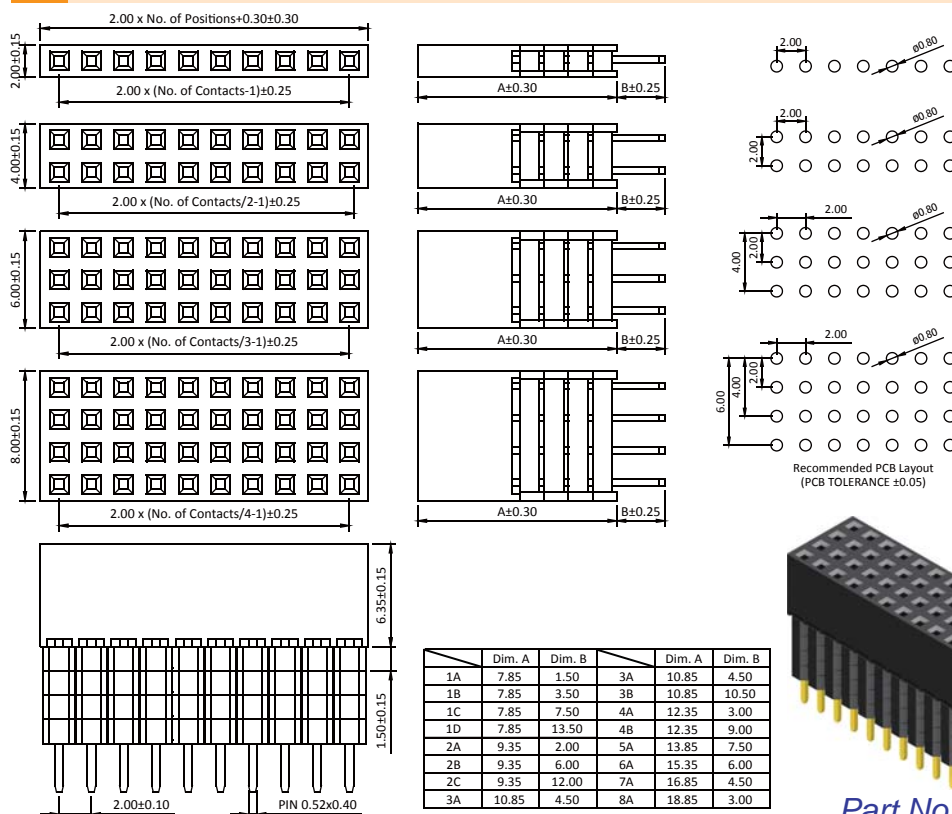

Part No.: PS2AE-1/2/3/4XX-L/U

Female Header 2.0mm

ROHS