



CONNECTORS MANUFACTURER

Female Header 2.0mm Side Entry SMT & DIP / Elevated SMT / Straight & Press Fit Type


Specifications

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated


ORDER INFORMATION

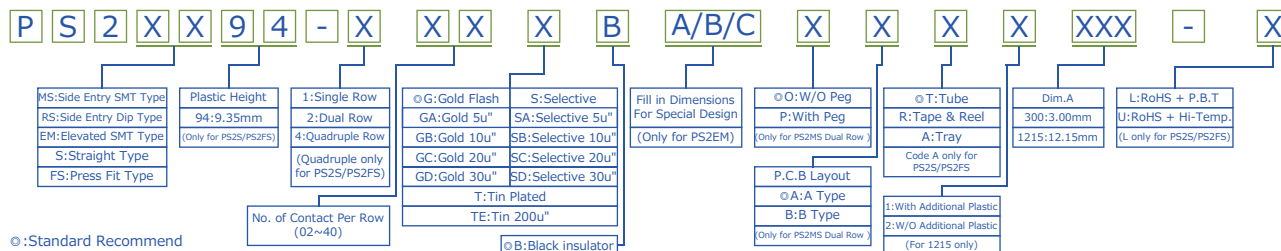

Pin Header 2.0mm 4 Row H=9.35mm Straight Type

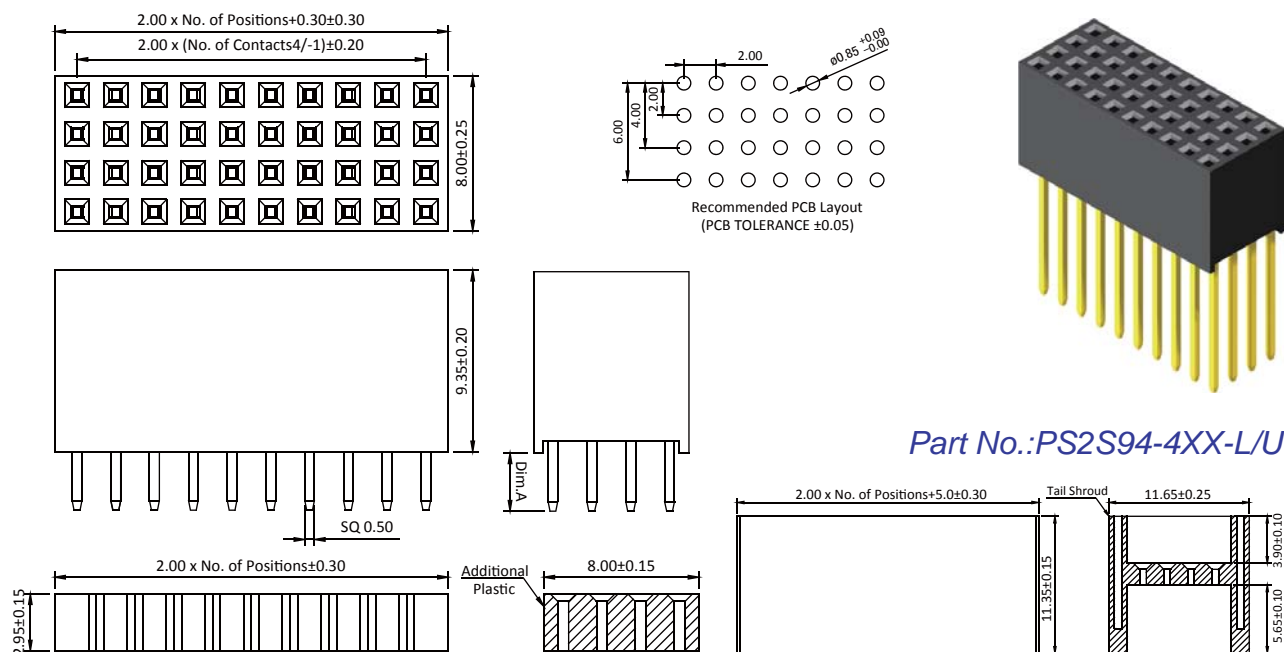

Female Header 2.0mm 4 Row H=9.35mm Press Fit Type

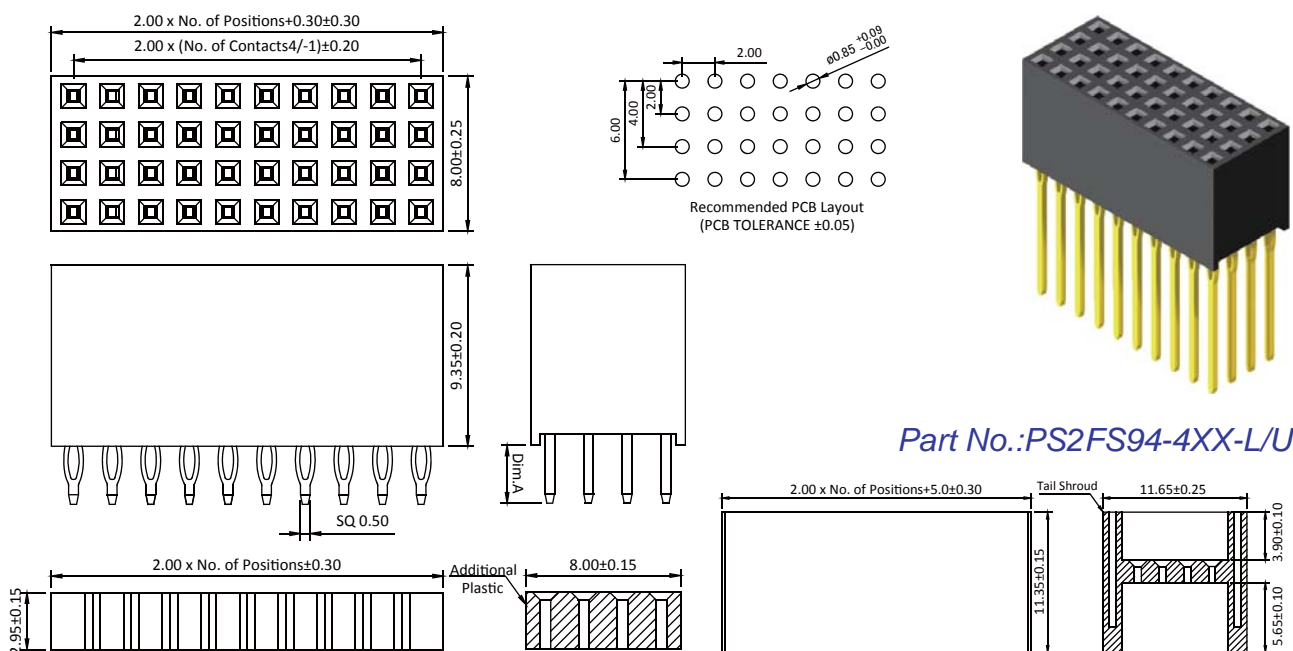

Female Header 2.0mm

ROHS