


Female Header 2.0mm Bottom Entry SMT / SMT Type


Specifications
 Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material
 Insulator: Hi-Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

ORDER INFORMATION

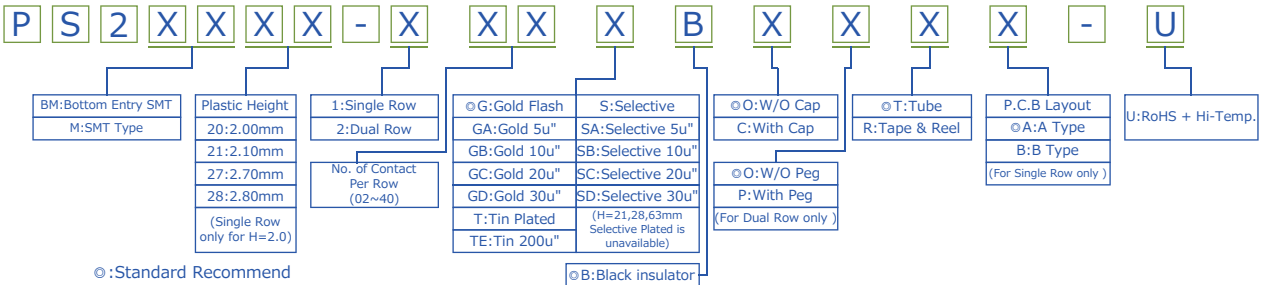

Female Header 2.0mm 1 & 2 Row H=2.0/2.7mm Bottom Entry SMT Type

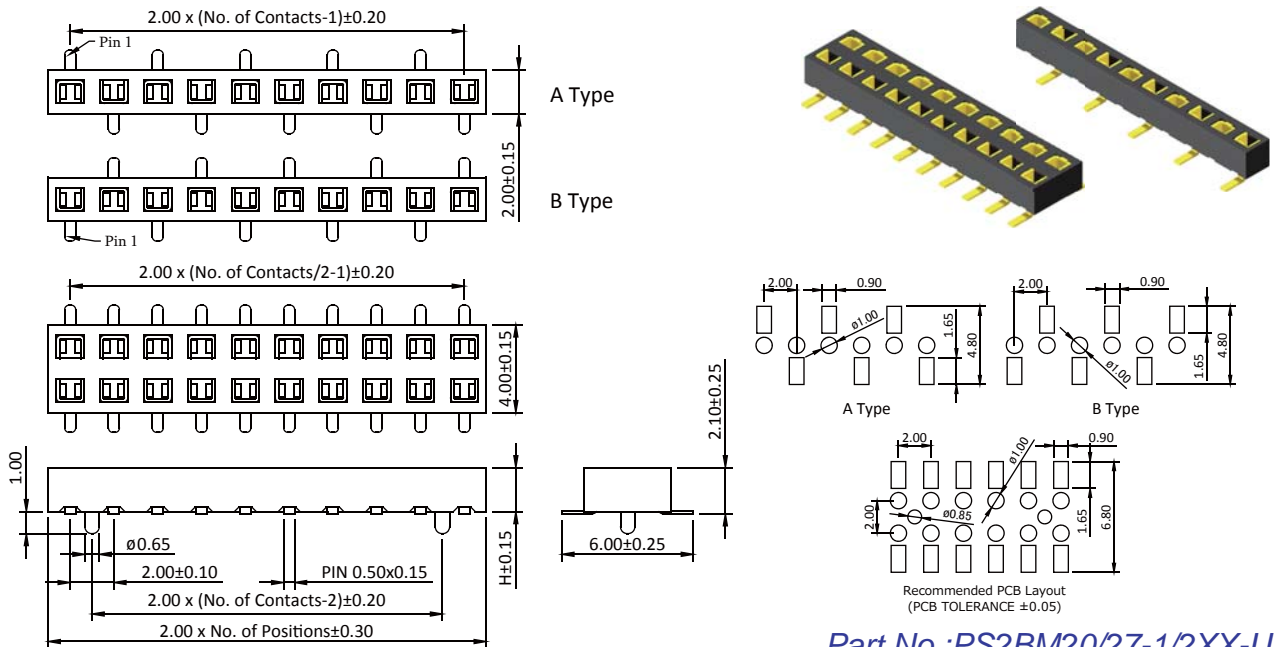

Female Header 2.0mm 2 Row H=2.1/2.8mm SMT Type

