



## Female Header 2.0mm Right Angle / Straight / Dual Entry Type


### Specifications

Current Rate: 2 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C





### Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated

### ORDER INFORMATION




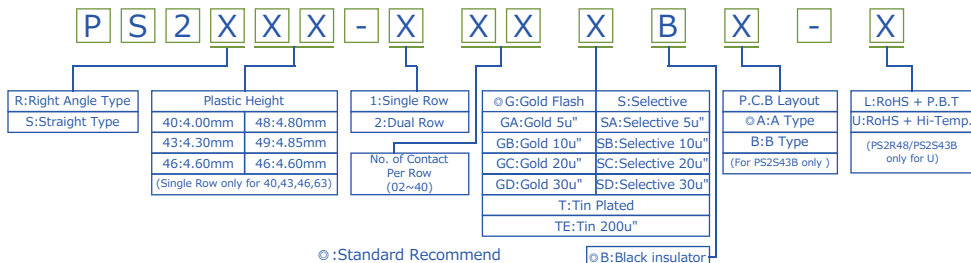


## Female Header 2.0mm 1 Row H=4.3mm Right Angle Type

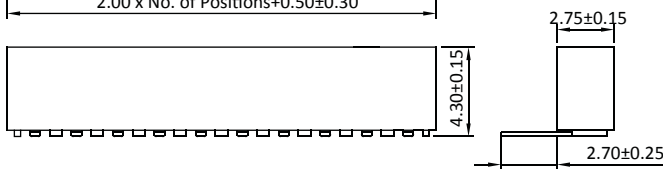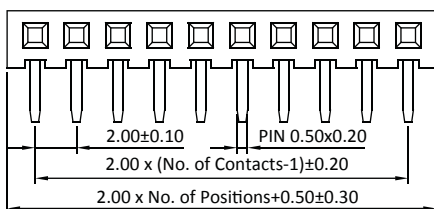






Part No.: PS2R43-1XX-L/U

## Female Header 2.0mm 2 Row H=4.8mm Right Angle Type

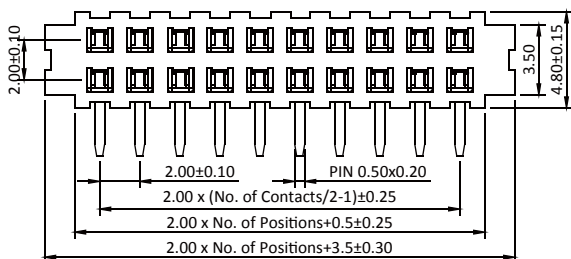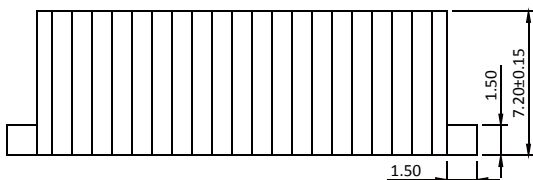

Part No.: PS2R48-2XX-U

## Female Header 2.0mm 2 Row H=4.85mm Right Angle Type

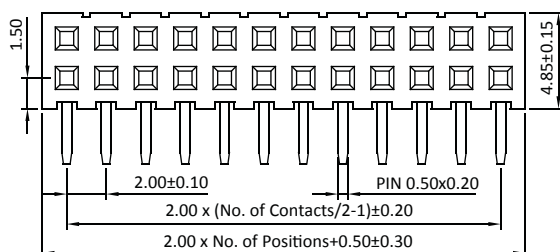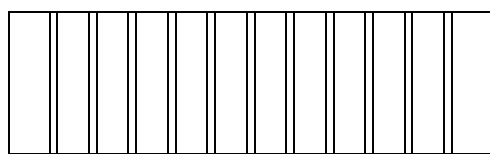

Part No.: PS2R49-2XX-L/U

F

Female Header 2.0mm

Pb

ROHS

CONNECTOR MANUFACTURER