



CONNECTORS MANUFACTURER

Female Header 2.0mm Straight With Bump / Bottom Close Straight / Straight / Kinked Type


Specifications

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated


ORDER INFORMATION

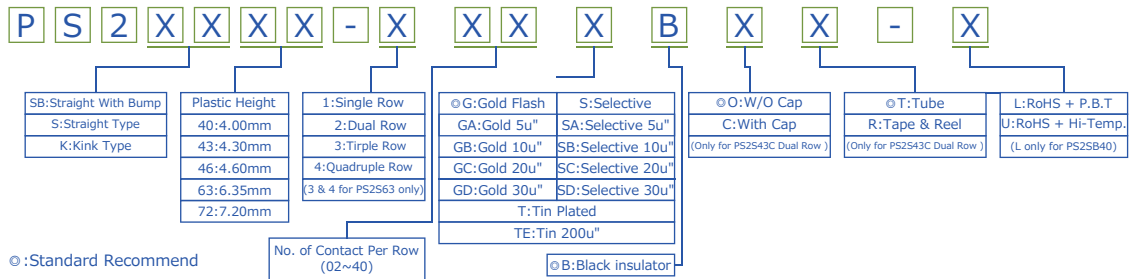

Female Header 2.0mm 2 Row H=4.0/4.3mm Straight Type With Bump

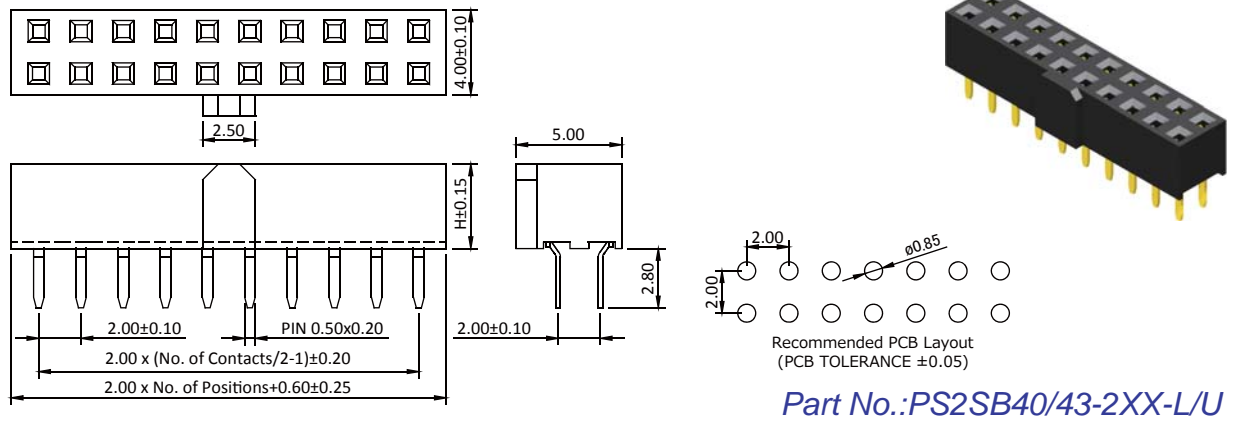

Female Header 2.0mm 1 & 2 Row H=4.3mm Bottom Close Straight Type

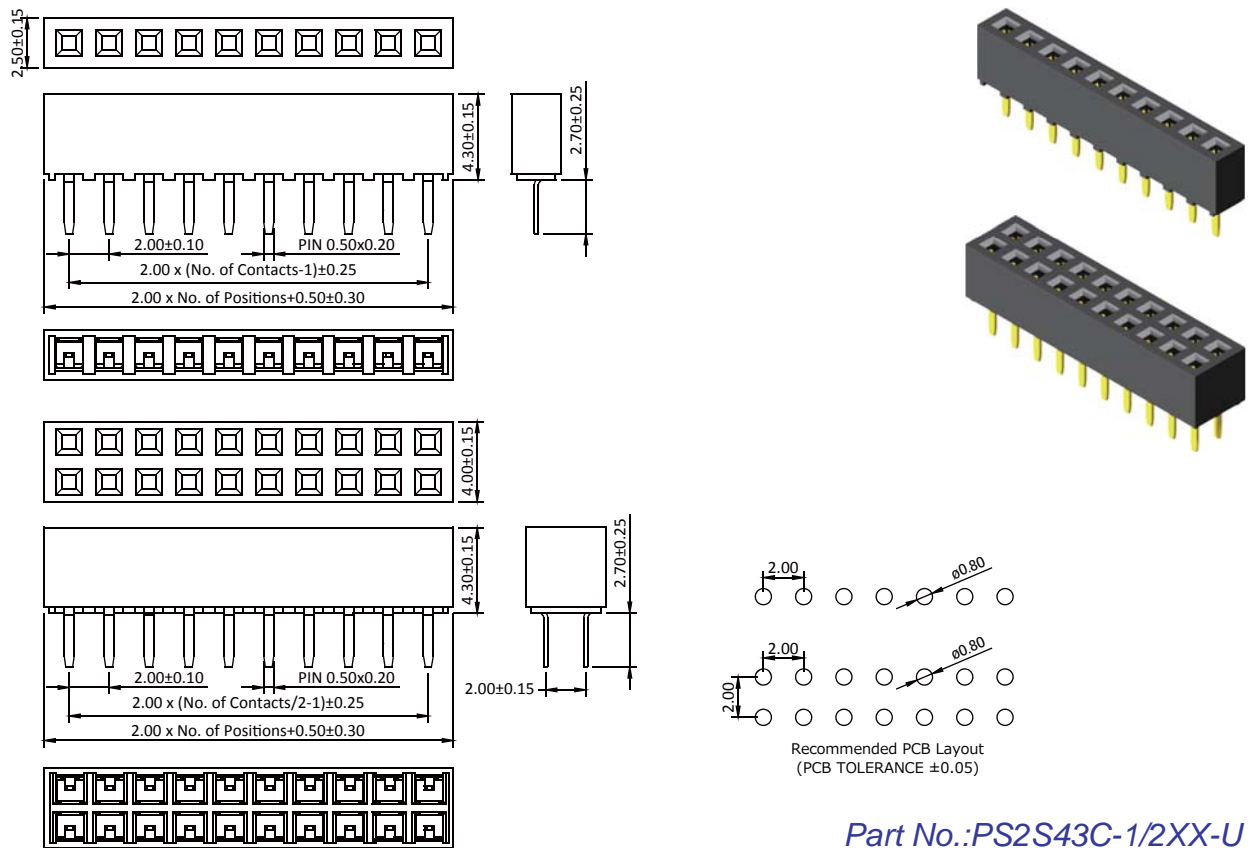

Female Header 2.0mm

ROHS

AMTEK CONNECTOR MANUFACTURER