




Female Header 1.27mm 1 & 2 Row SMT Type

Specifications
 Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C


Material
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

ORDER INFORMATION

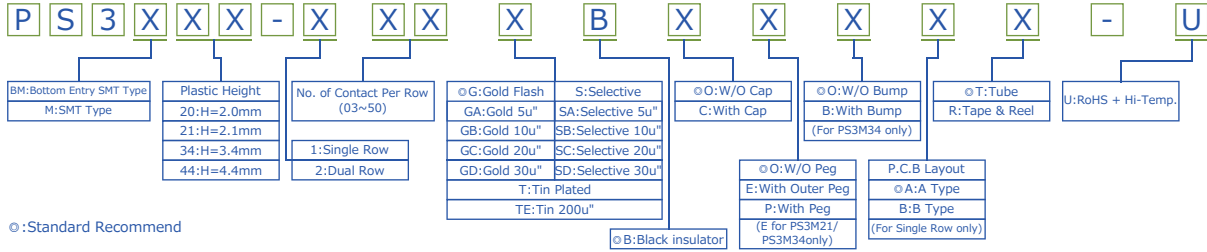


○:Standard Recommend

Female Header 1.27mm 1 & 2 Row H=2.0 Bottom Entry SMT Type

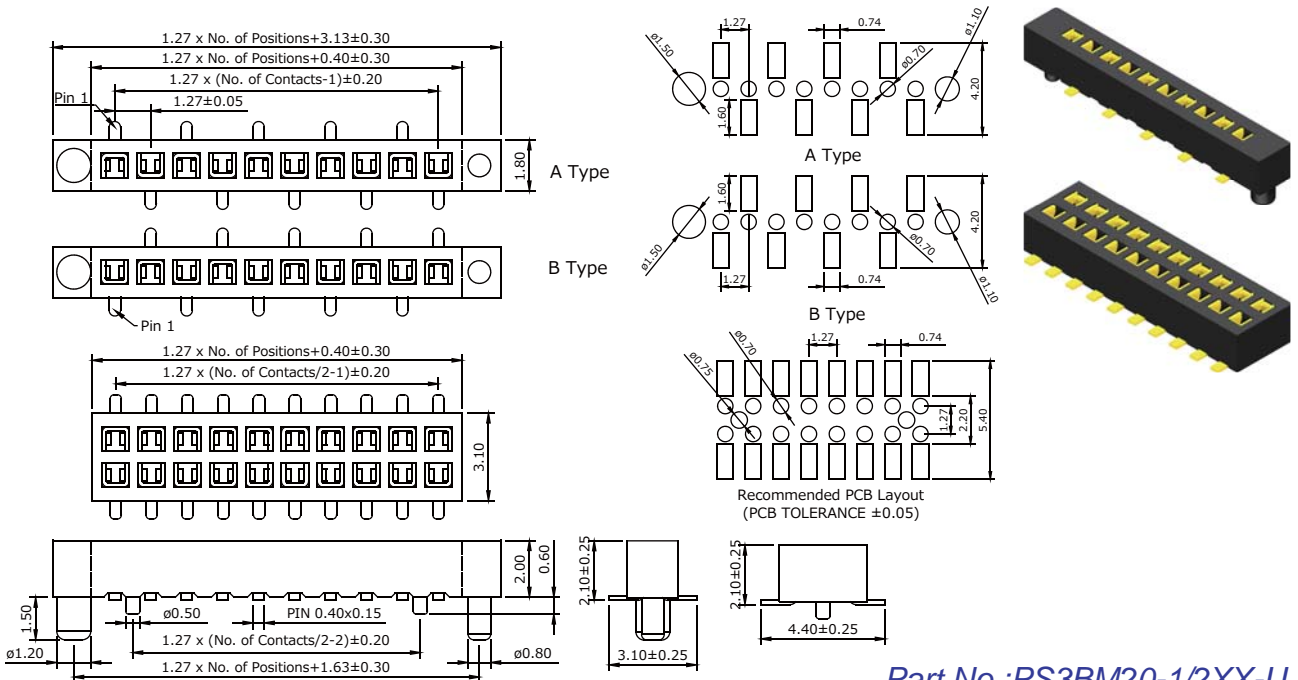

Part No.:PS3BM20-1/2XX-U

Female Header 1.27mm 1 Row H=2.1mm SMT Type

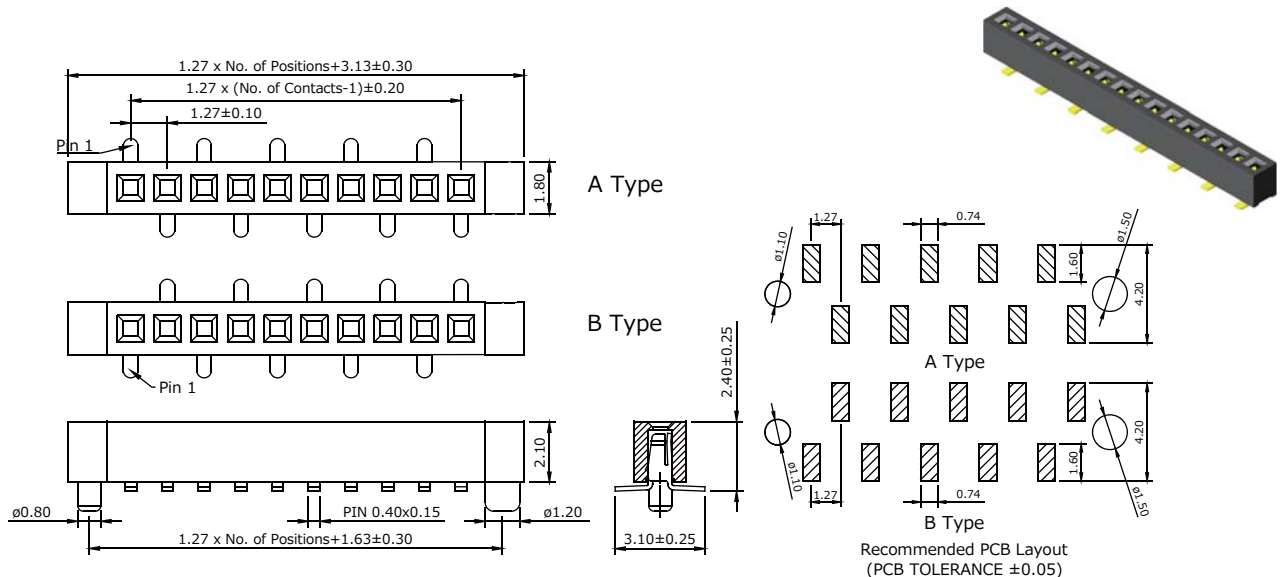

Part No.:PS3M21-1XX-U

F

Female Header 1.27mm

Pb

RoHS