



Female Header 1.27mm 1 & 2 Row R/A / Straight / Kinked / Side Entry SMT & Dip Type


Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

ORDER INFORMATION

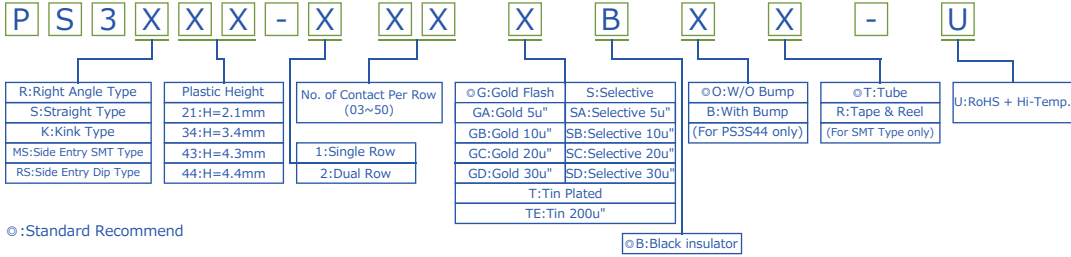


Female Header 1.27mm 1 & 2 Row H=4.4 Right Angle Type

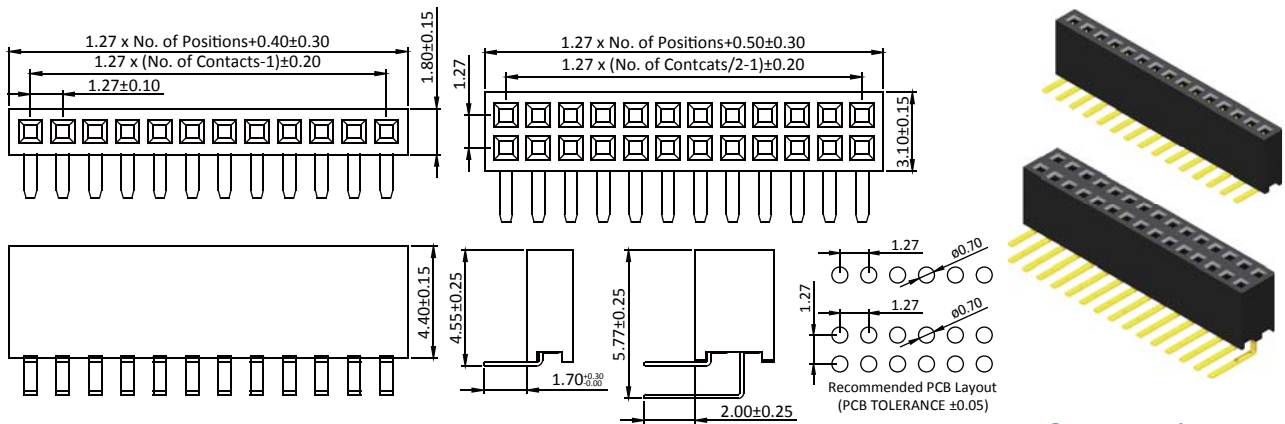


Part No.: PS3R44-1/2XX-U

Female Header 1.27mm 1 & 2 Row H=2.1 Straight Type

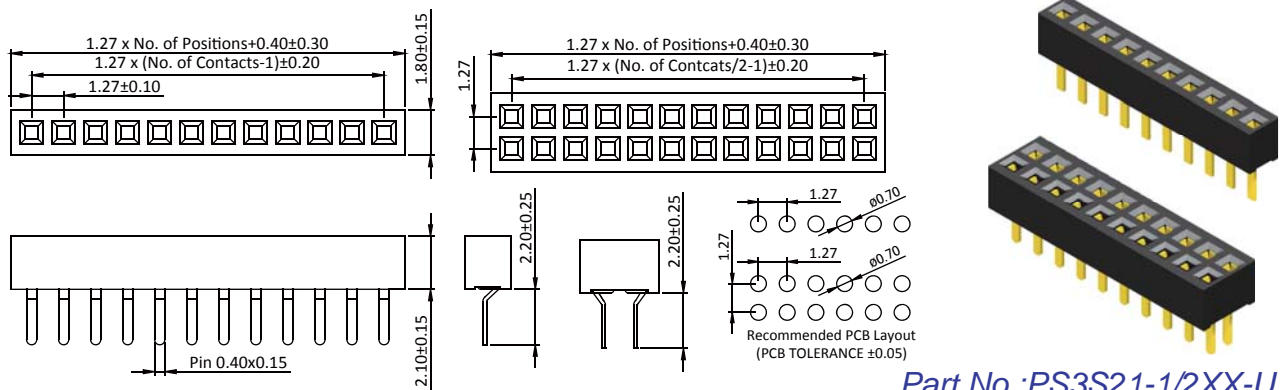

Part No.: PS3S21-1/2XX-U

Female Header 1.27mm 1 & 2 Row H=3.4/4.4 Straight Type

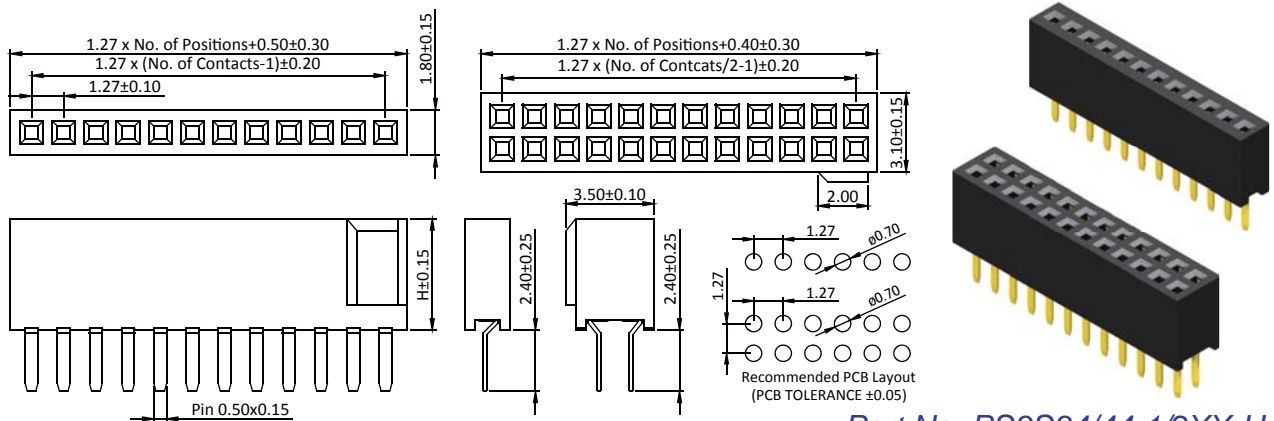

Part No.: PS3S34/44-1/2XX-U

Female Header 1.27mm

ROHS

AMTEK CONNECTOR MANUFACTURER