

## Female Header 1.0mm SMT / SMT R/A Type


### Specifications

Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material


Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated

## ORDER INFORMATION

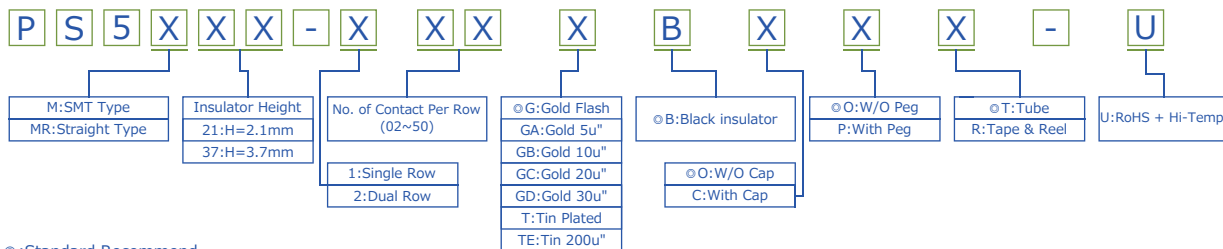


$\odot$ : Standard Recommend

## Female Header 1.0mm 1 Row H=2.1mm SMT Type

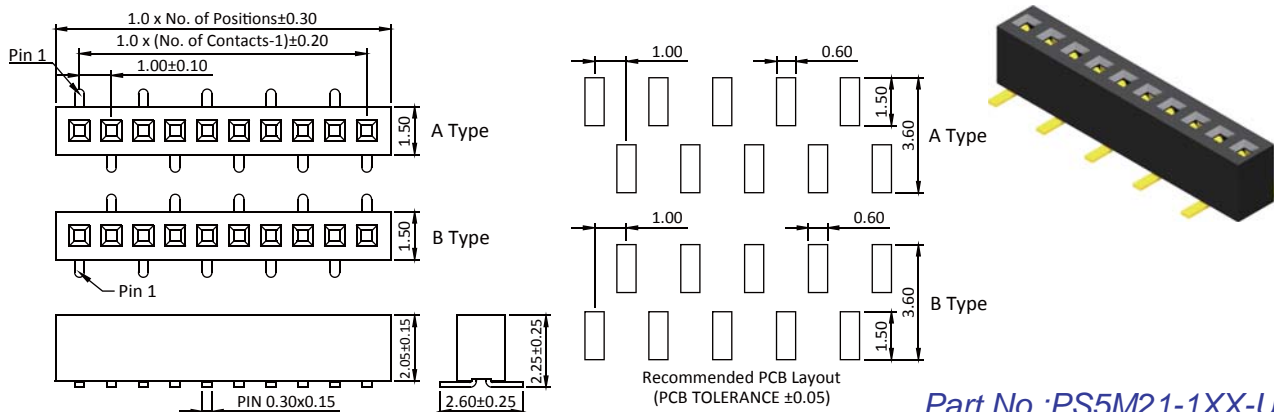

## Female Header 1.0mm 2 Row H=2.1mm SMT Type

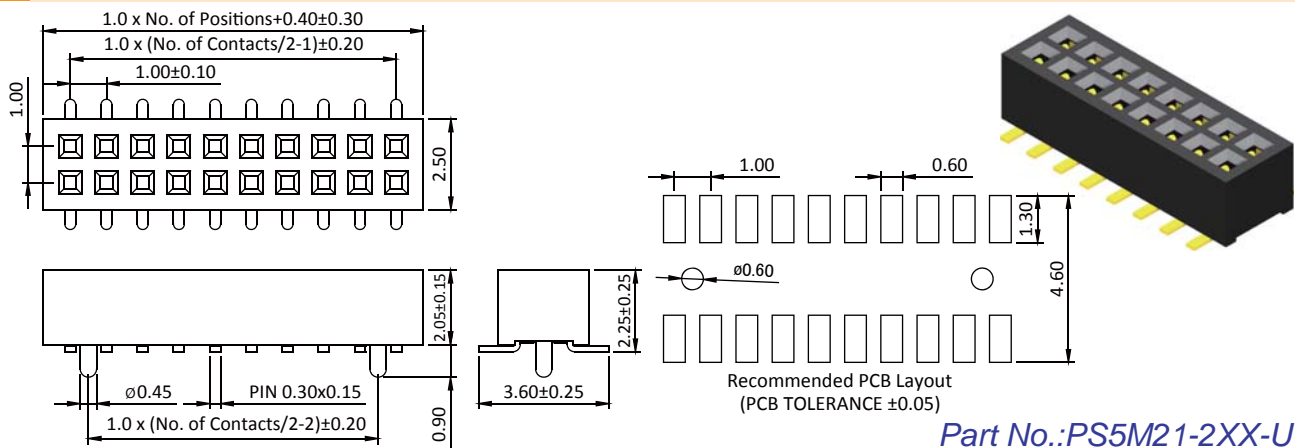

## Female Header 1.0mm 1 Row H=3.7mm SMT R/A Type

