



Female Header 1.0mm Straight Type


Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material






Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

ORDER INFORMATION

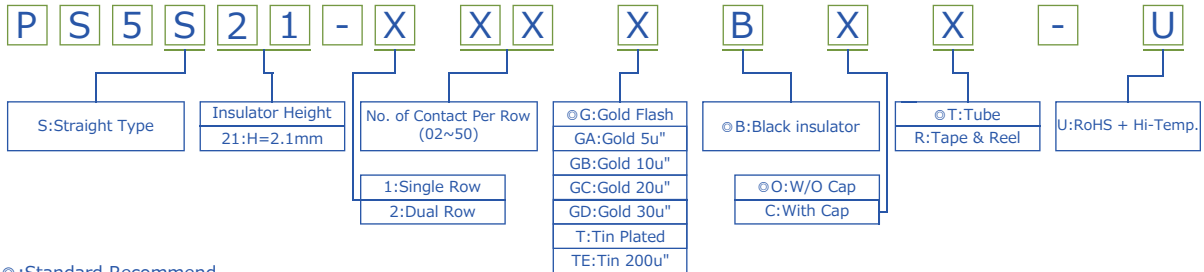






◎: Standard Recommend

Female Header 1.0mm 1 Row H=2.1mm Straight Type

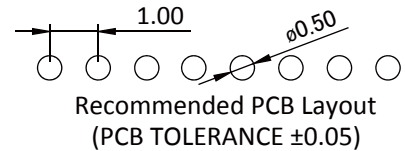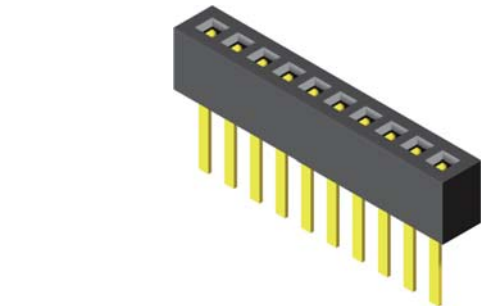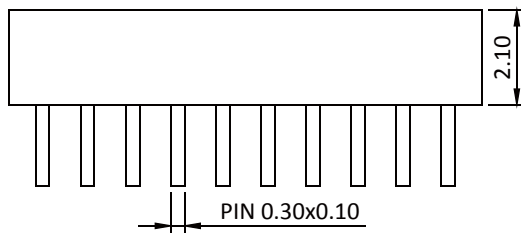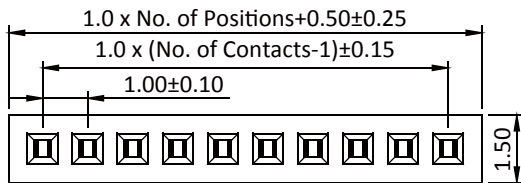

Part No.: PS5S21-1XX-U

Female Header 1.0mm 2 Row H=2.05mm Straight Type

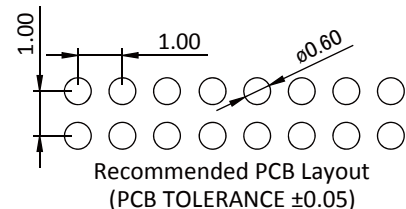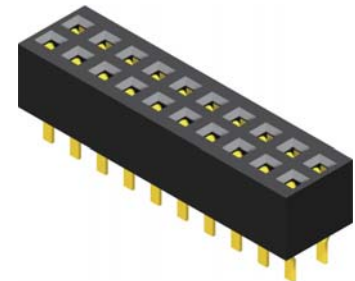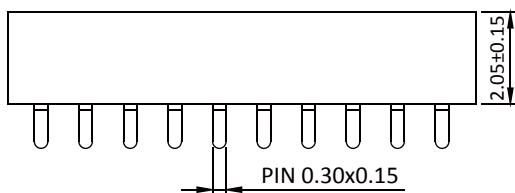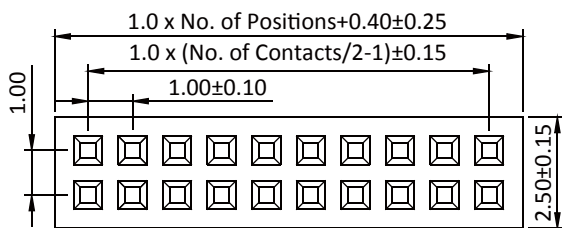

Part No.: PS5S21-2XX-U

Female Header 1.0mm



ROHS