



Female Header 0.8mm SMT Type


Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C





Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

ORDER INFORMATION

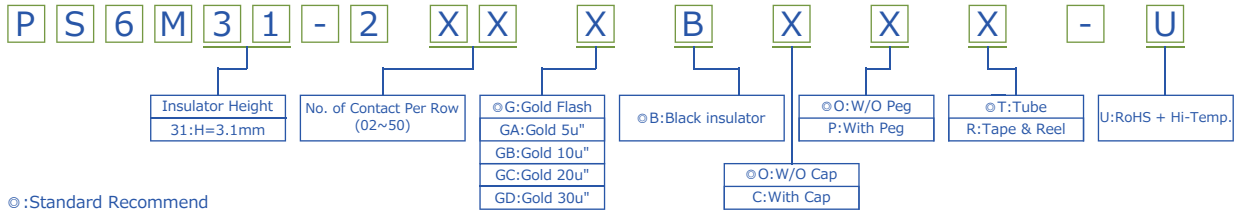

Female Header 0.8mm H=3.1mm 2 Row SMT Type

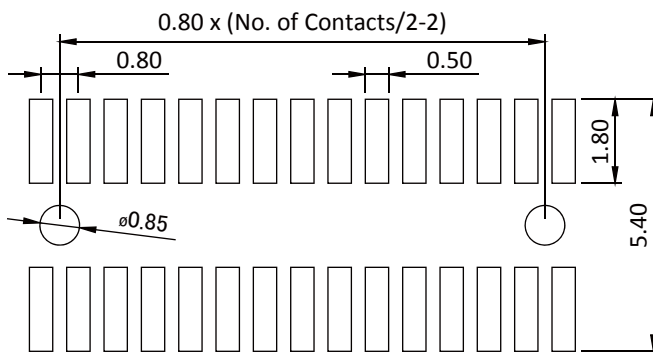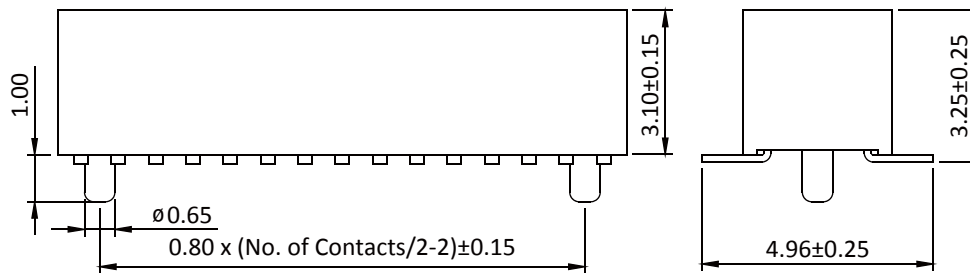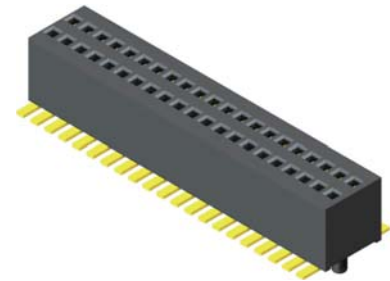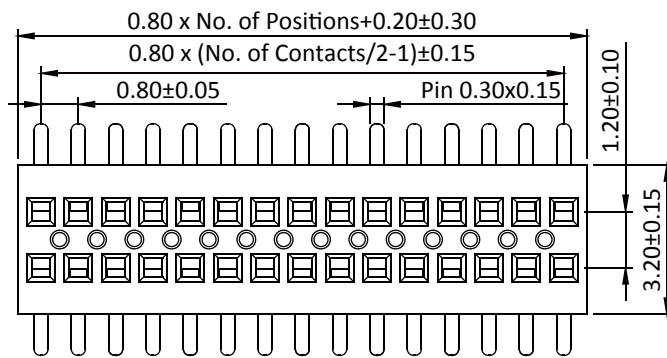

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Part No.: PS6M31-2XX-U

F

Female Header 0.8mm

Pb

ROHS