





CONNECTORS MANUFACTURER

S.ATA 7+15P Male Connector For H.D Use


Specifications

- Current Rate: 1.5 AMP
- Insulation Resistance: 1000M Ω Min
- Contact Resistance: 30 m Ω Max
- Dielectric Voltage: 500V AC for one minute
- Operation Temperature: -55° C to +125° C
- Material
- Insulator: High temperature thermoplastic, UL 94V-0
- Standard: LCP
- Terminal: Copper Alloy
- Plating: Selective Plating

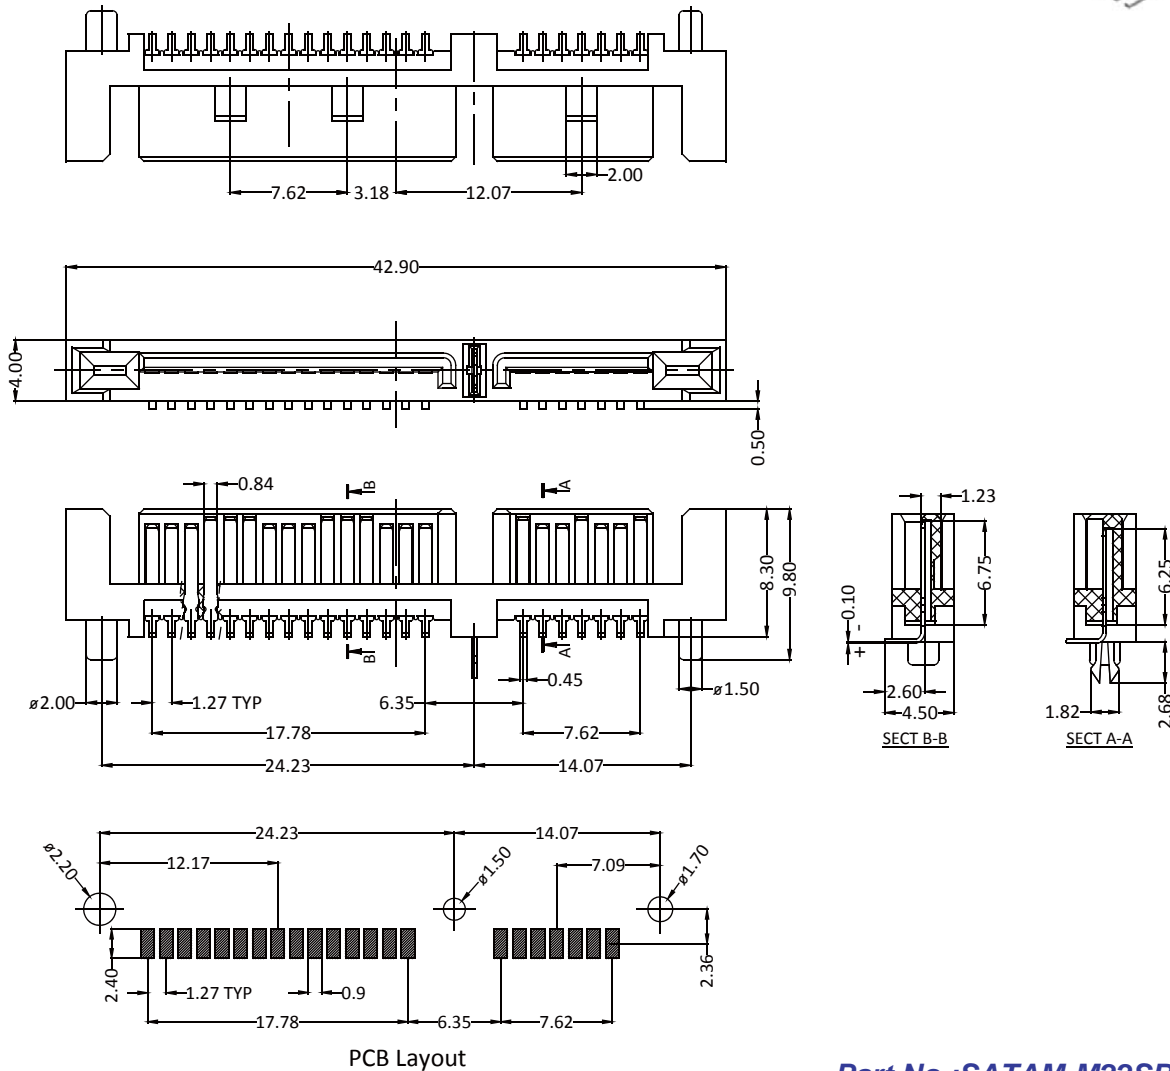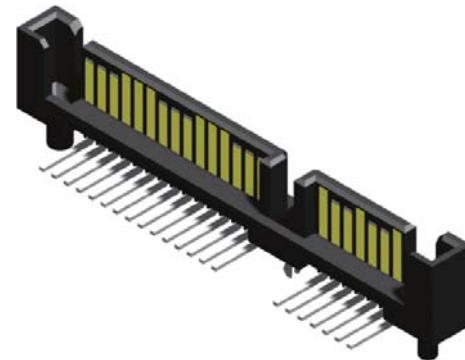

Part No.: SATAM-M22SB-HD-U

ORDER INFORMATION

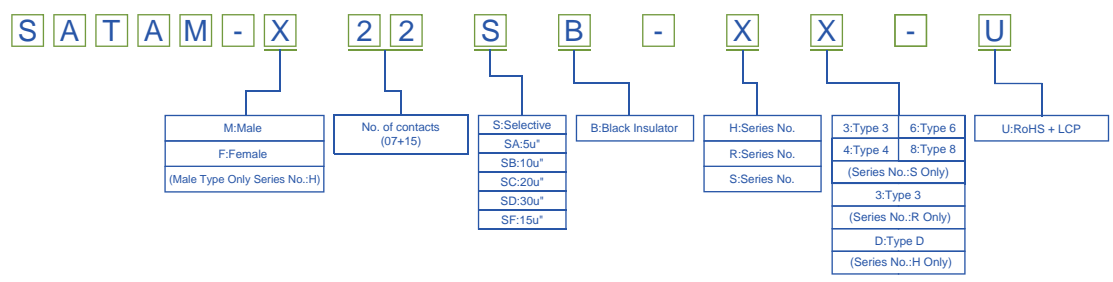

©: Standard Recommend

Serial ATA

RoHS