



## S.ATA 7+15P SMT R/A Type

### Specifications

Current Rate:1.5 AMP

Insulation Resistance:1000M  $\Omega$  Min

Contact Resistance:30 m $\Omega$  Max

Dielectric Voltage:500V AC for one minute

Operation Temperature:-55° C to +125° C



### Material

Insulator:High temperature thermoplastic,UL 94V-0

Standard:LCP


Terminal:Copper Alloy

Plated:Selective Plated

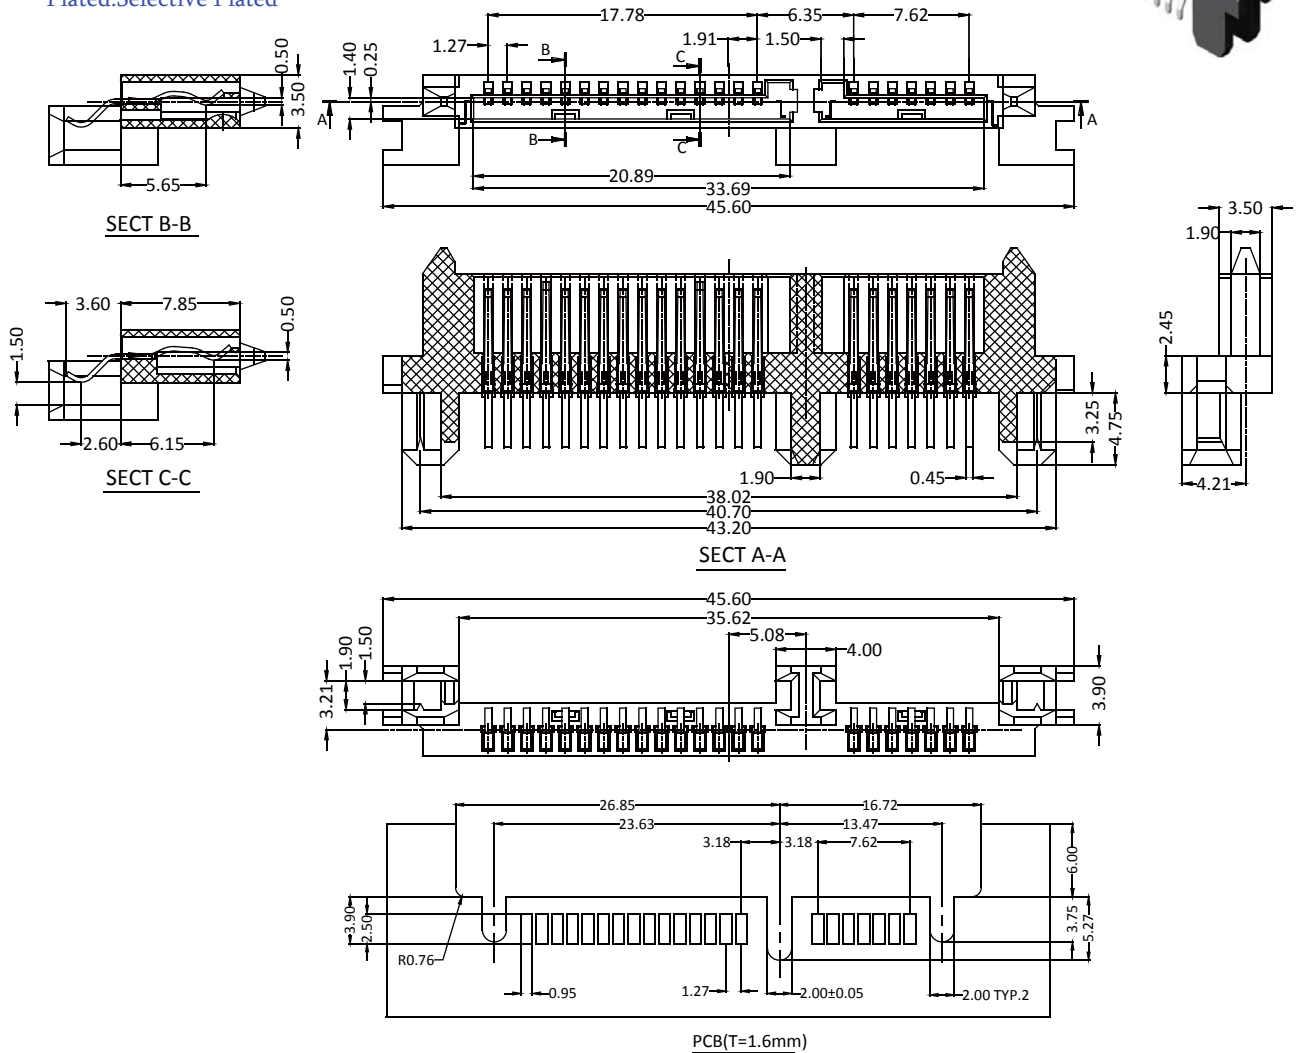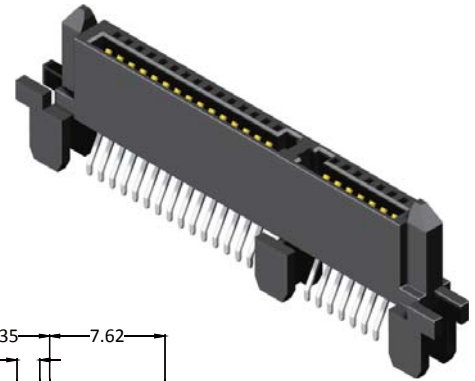

Part No.:SATAMR-F22SB-R6-U

## ORDER INFORMATION

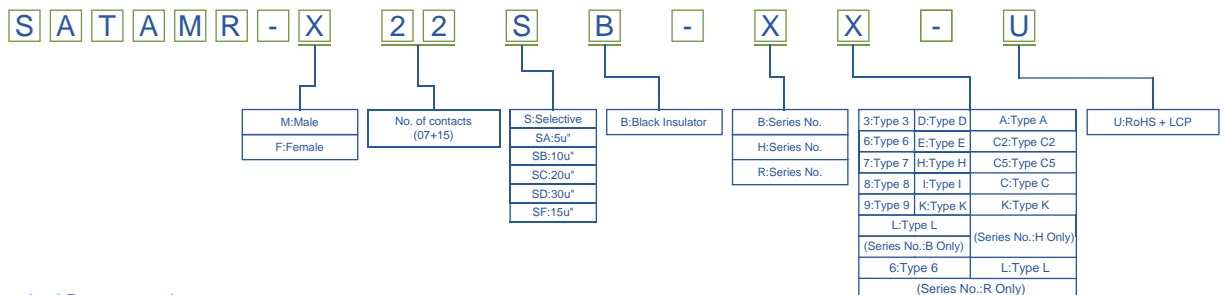

©:Standard Recommend