
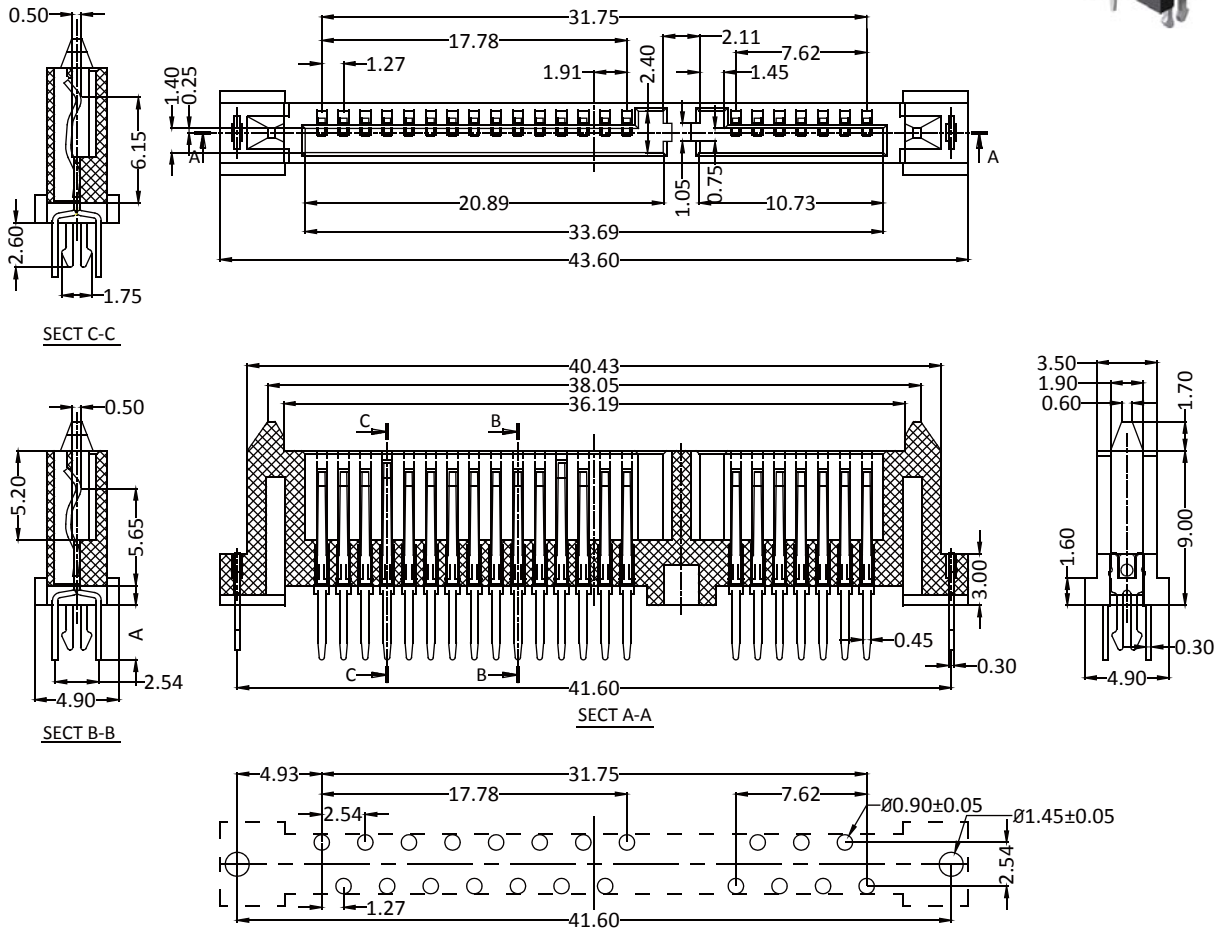


## S.ATA 7+15P Straight Type

### Specifications


- Current Rate: 1.5 AMP
- Insulation Resistance: 1000M  $\Omega$  Min
- Contact Resistance: 30 m $\Omega$  Max
- Dielectric Voltage: 500V AC for one minute
- Operation Temperature: -55° C to +125° C
- Material
- Insulator: High temperature thermoplastic, UL 94V-0
- Standard: LCP
- Terminal: Copper Alloy
- Plated: Selective Plated

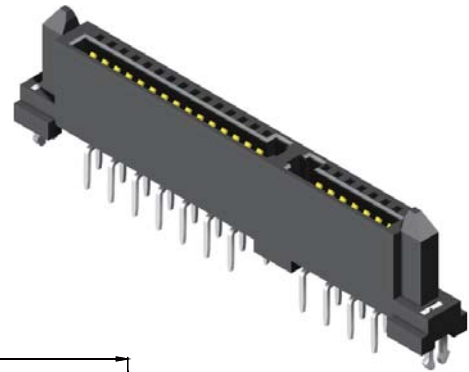

Part No.	Dim.A
SATAS-F22SB-R1-U	3.00
SATAS-F22SB-RA-U	3.18

**Part No.: SATAS-F22SB-XX-U**

## ORDER INFORMATION

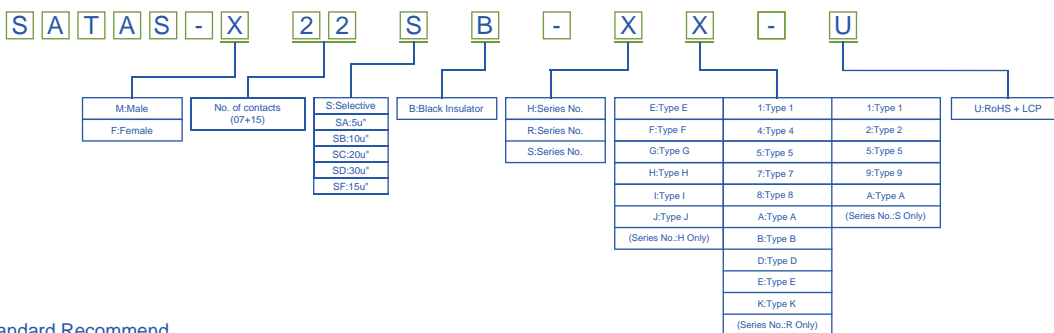

©: Standard Recommend