

LARGE CAN TYPE

UP Series

JAMICON®

- High temperature 85°C, high ripple current and high reliability.
- Aluminum can with threaded stud mounting.
- Long life for 10000 hours.



● SPECIFICATION

Item	Characteristic			
Operation Temperature Range	-40 ~ +85°C			
Rated Working Voltage	350 ~ 450VDC			
Capacitance Tolerance (120Hz 20°C)	±20%(M)			
Leakage Current (20°C)	I ≤ 0.02CV or 5 (mA) I : Leakage Current (μA)		*Whichever is smaller after 5 minutes C : Rated Capacitance (μF) V : Working Voltage (V)	
Surge Voltage (20°C)	W.V.	350	400	450
	S.V.	400	450	500
Dissipation Factor (tan δ) (120Hz 20°C)	Rated Voltage (V)	350	400	450
	tan δ	0.15	0.15	0.15
Low Temperature Stability	Impedance ratio at 120Hz			
	Rated Voltage (V)	350~450		
	-25°C / +20°C	8		
Load Life	After 10000 hours application of W.V. and +85°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage ≤ rate working voltage)			
	Capacitance Change	≤ ±20% of initial value		
	Dissipation Factor	≤ 200% of initial specified value		
	Leakage current	≤ initial specified value		
Shelf Life	At +85°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (with voltage treatment)			


● TERMINAL TYPE

φD	P	d1(max)	d2	T	T1
51	22.0	11.0	7.88	16	12
64	28.5	12.0	7.88	16	12
77	31.8	11.9	7.88	16	12
90	31.6	14.0	13.0	17	12

● RIPPLE CURRENT COEFFICIENTS

Frequency(Hz)	60	120	300	1k	≥10k
Multiplier	0.70	1.00	1.10	1.30	1.40

Temperature(°C)	40	60	85
Multiplier	1.89	1.67	1.00

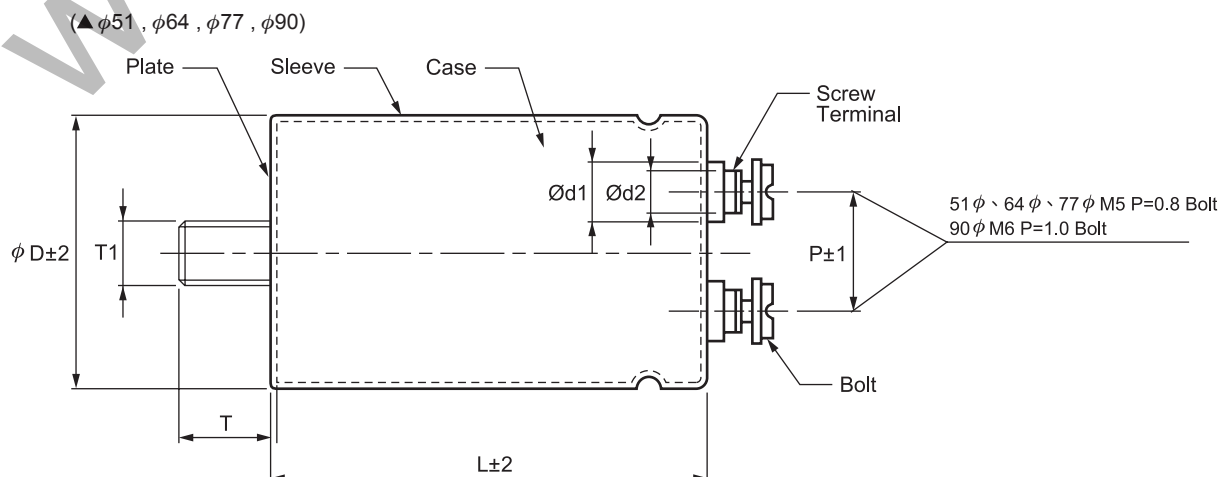

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
 Max ripple current : A(rms) 85°C 120Hz

μF	V(Code) Code φD	350 (2V)				400 (2G)				450 (2W)			
		51	64	77	90	51	64	77	90	51	64	77	90
1000	102	75				75				96			
		7.99				6.39				8.30			
1200	122	75				96				115			
		8.75				7.79				9.86			
1500	152	96				115				130			
		10.9				9.45				11.6			
1800	182	96				130				96			
		11.9				10.9				12.3			
2200	222	130					96			115			
		15.1					11.6			14.7			
2700	272		96				115			130	115		
			16.1				13.9			17.2	17.5		
3300	332		115				130			155	130		
			19.2				16.3			20.5	20.4		
3900	392		130				155	115		195			
			22.1				19.1	18.0		24.8			
4700	472		155	115			195	130			155		
			26.2	24.7			23.3	20.8			25.4		
5600	562		195	130			195	155			195	157	
			30.8	28.4			24.6	23.7			30.7	29.3	
6800	682			155					157				196
				32.7					27.7				35.7
8200	822				157				157				196
					38.0				30.4				39.2
10000	103				157				196				236
					42.0				35.7				45.4
12000	123				196				236				
					50.8				42.6				
15000	153				236								L(mm)
					59.5								R.C.

