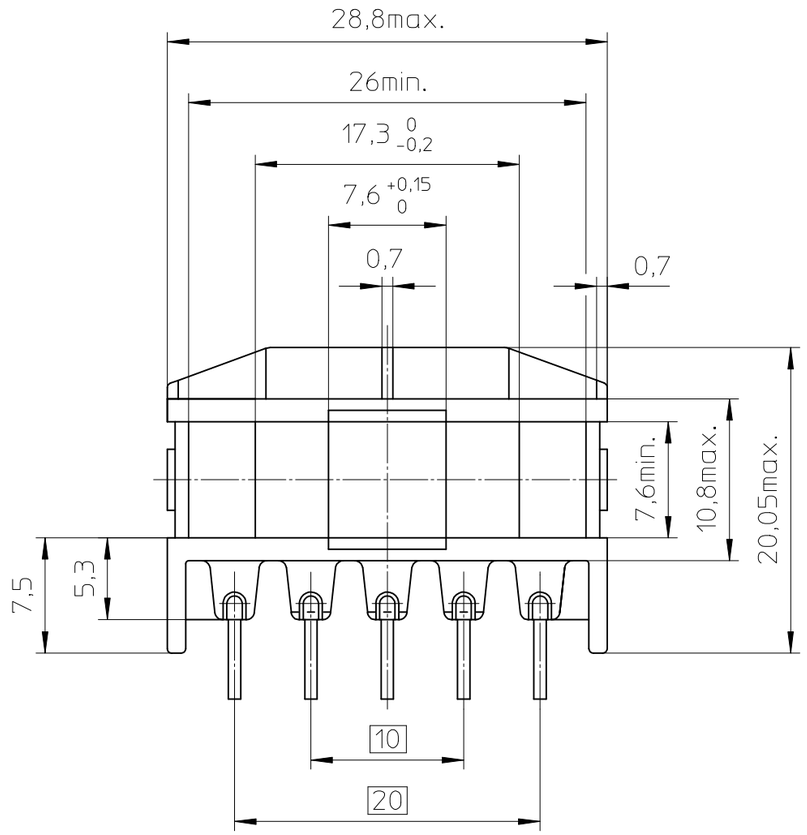

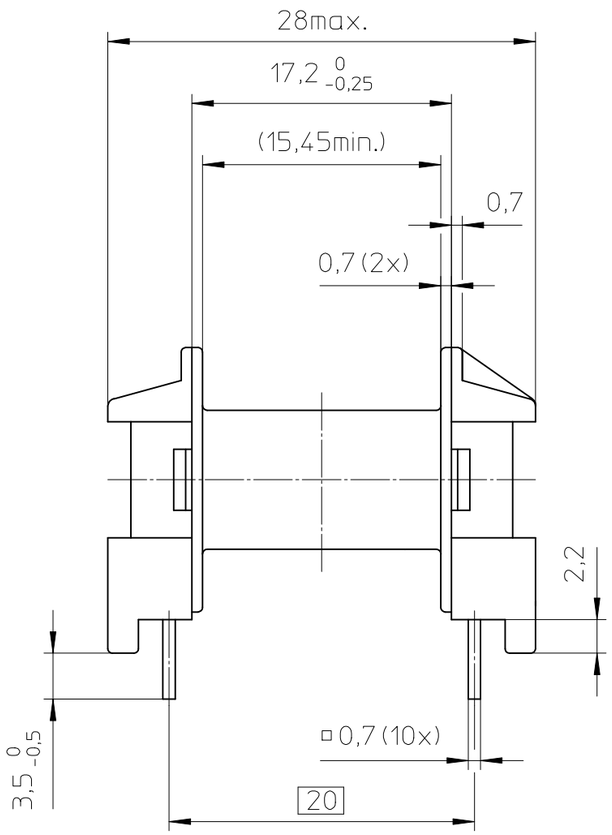

PIN ARRENGEMENT:

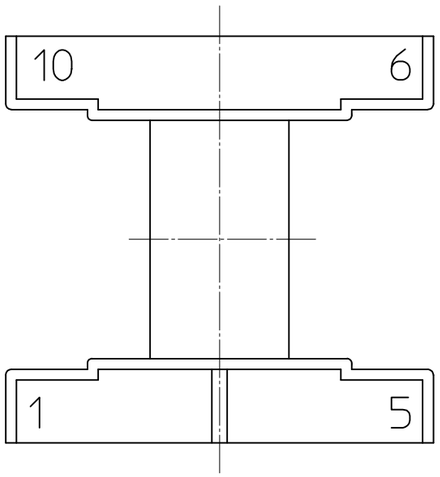

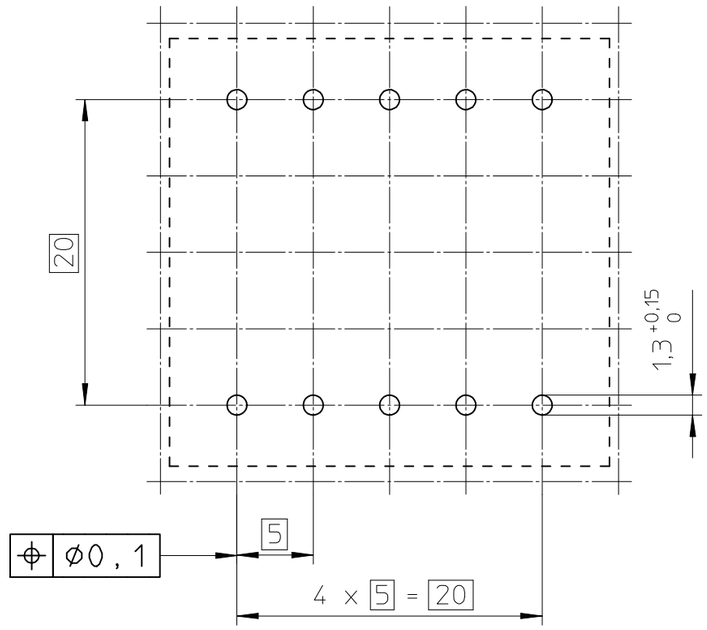

Coil former material:	Valox 420SE0 (PBT), glass-reinforced.
	UL file number: E45329 - UL94V-0.
Pin material:	Copperclad steel - Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class F, 155°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
Min. winding area:	61,8 mm^2.
Mean length of turn:	52,4 mm.

CLASS.NO.	CPH-E25/13/7-1S-10P	4322 021 00391	93-09-24		
97-02-14			~~97-02-14~~		
			~~97-04-18~~		
			~~04-10-05~~		
			07-02-14		
NAME NAAM A.Wojtasz	SUPERS. VERV.	1	SH BL. SH BL. 112 – 001	069	A3
MPA CHECK CONTR.	DAT. 93-01-11	Property of Eigendom van	© FERROXCUBE 2000		