

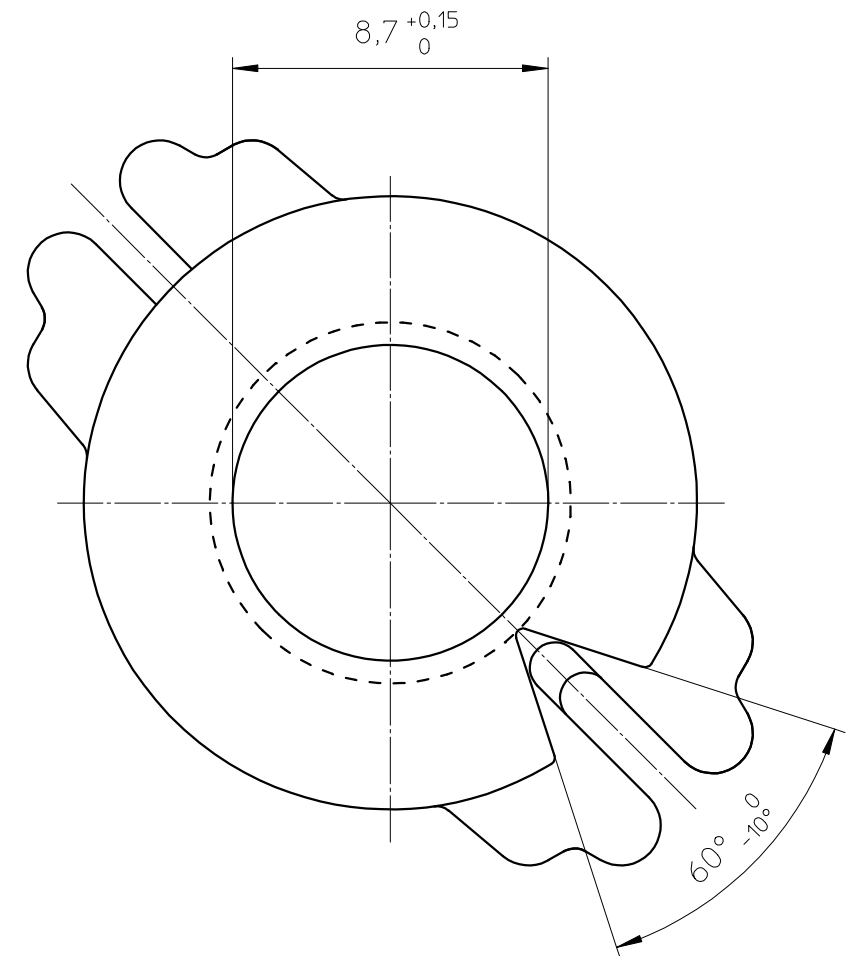
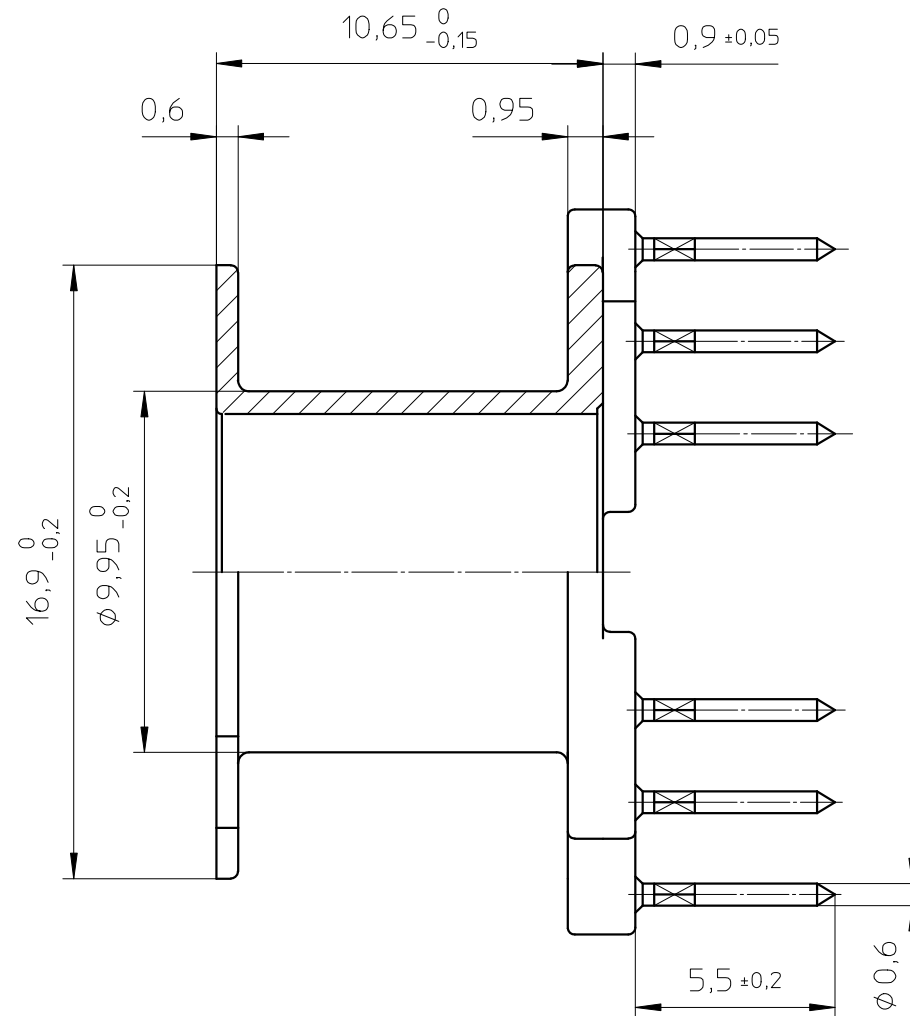
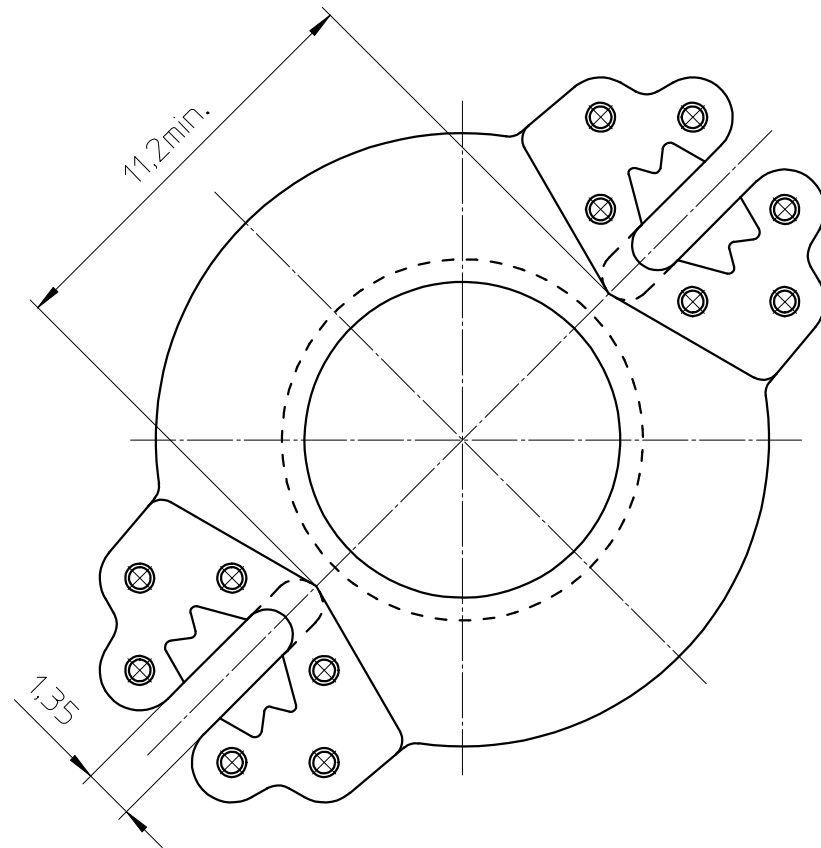





PHASED OUT

HOLE PATTERN:

Space requirement 8x8 pitch.

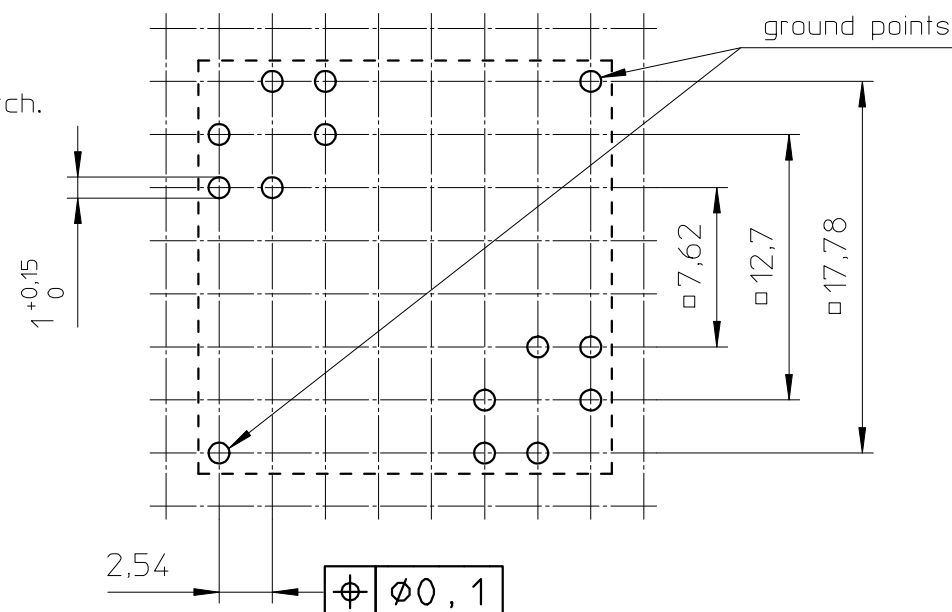

Coil former material: Bakelite UP 3420 (UP), glass-reinforced.
UL file number: E61040 - UL94V-0.
Pin material: CuSn - Ni flash, Sn plated.
Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
Min. winding area: 30 mm².
Mean length of turn: 42 mm.

CLASS.NO.	CSV-RM8-1S-12P-G		4322 021 00841		04-09-28
					05-09-01
00-05-10					00-05-10
					00-08-01
NAME NAAM	M.Veekens		SUPERS. VERV.	1	SH SH BL BL
MPA	CHECK CONTR.	DAT.	94-06-17	Property of Eigendom van	© FERROXCUBE 2000
				112 - 001	010
				A3	