
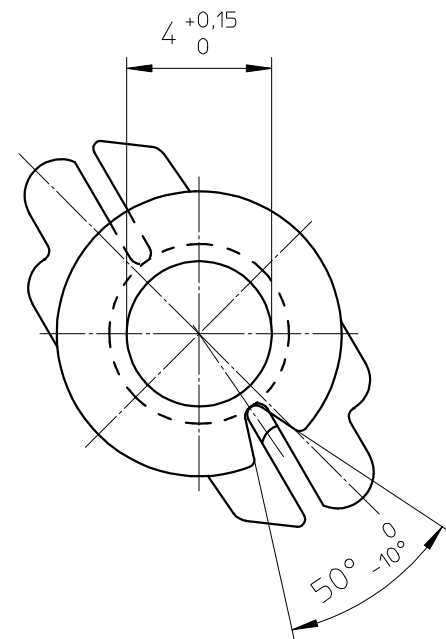


FERROXCUBE


PHASED OUT

Coil former material: Bakelite UP3420, glass-reinforced.
UL file number: E61040 - UL94V-0.
Pin material: CuSn - Ni flash, Sn plated.
max. operating temp. : 180°C.
Resistance to soldering heat: 500°C - 5sec.
Solderability: IEC 68-2-20 Part 2, Test Ta, method 1.
Winding area: 7,7 mm².
Mean length of turn: 19,8 mm.

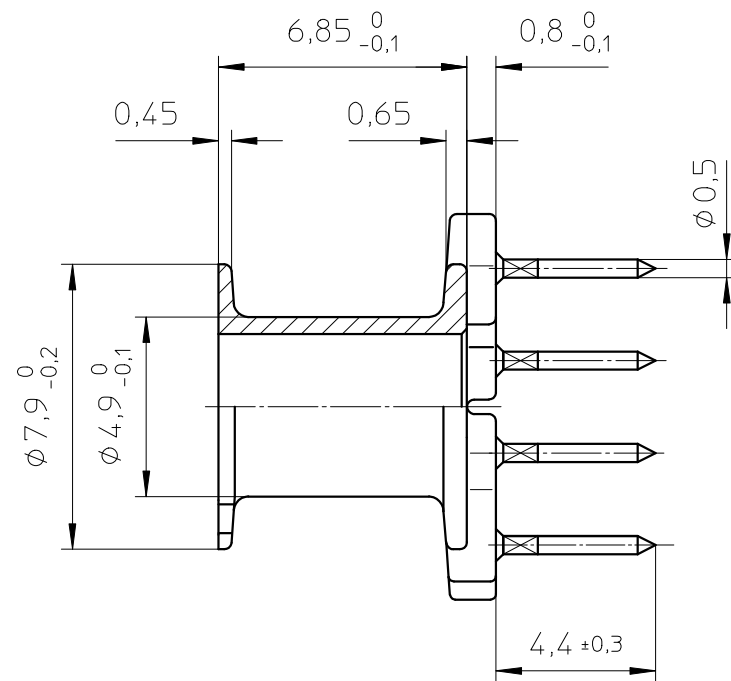

HOLE PATTERN:

Space requirement 4x4 pitch.

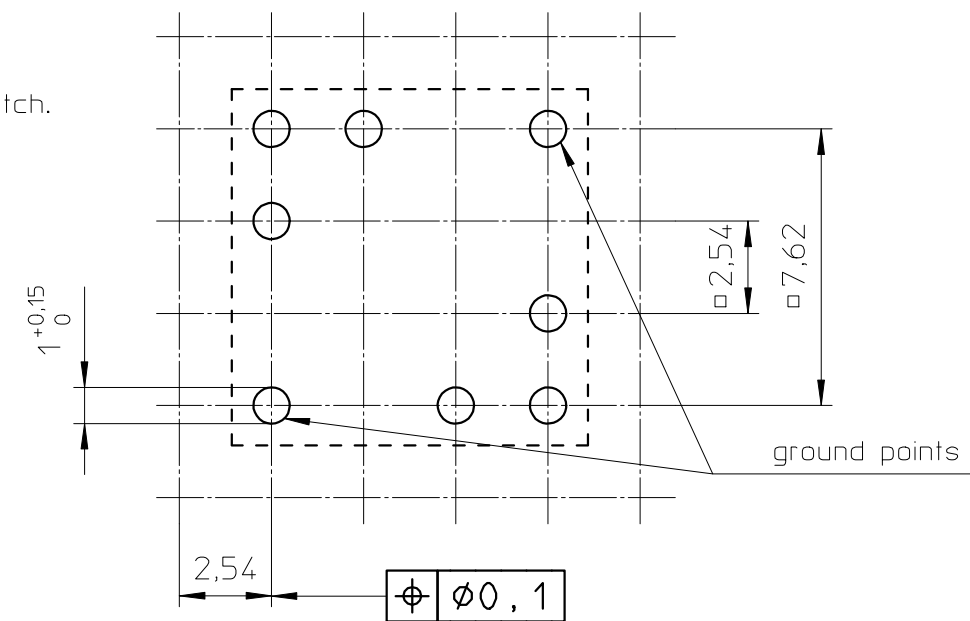

CLASS.NO.	CSV-RM4-1S-6P		4322 021 00971		99-10-06
00-05-04					00-05-04
					00-08-01
					04-09-28
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SH SH BL BL	112 - 001
MPA	CHECK CONTR.	DAT.	94-06-17	Property of Eigendom van	© FERROXCUBE 2000
					010
					A3