
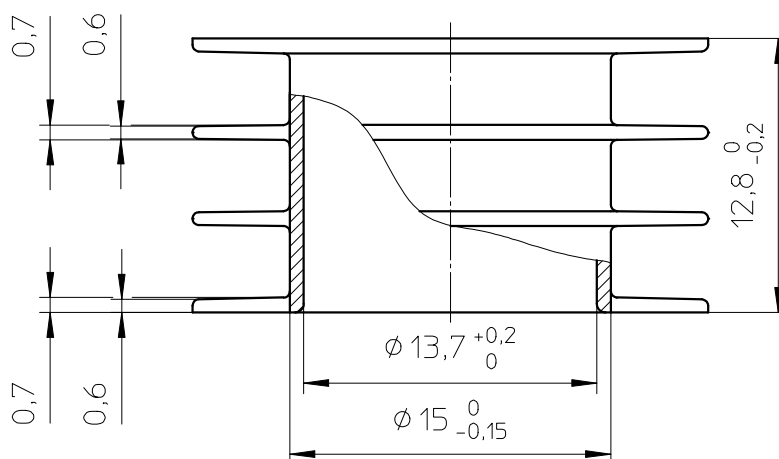


1 2 3 4

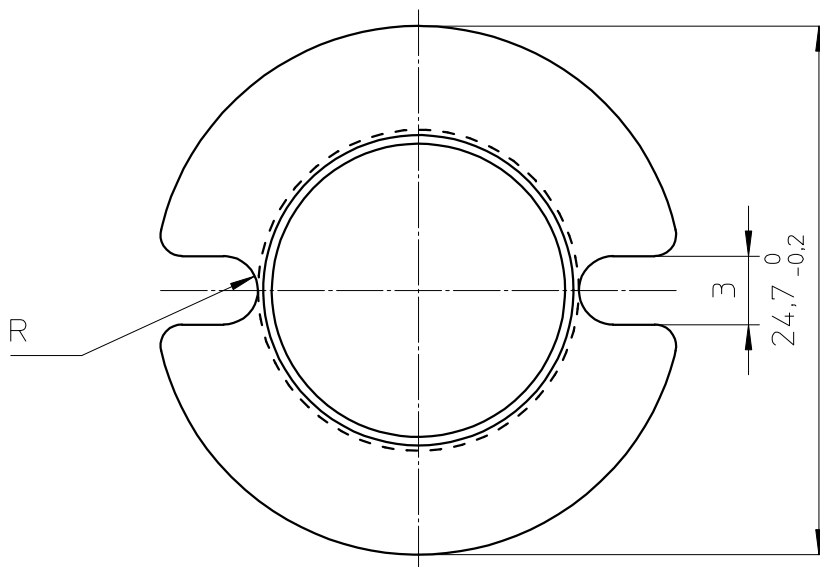

Coil former material: Valox 420SEO (PBT), glass-reinforced.  
 UL file number: E45329 - UL94V-0.  
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.  
 Min. winding area: 46,5 mm<sup>2</sup>.  
 Mean length of turn: 62 mm.

|              |           |                  |                |                             |          |                   |     |   |     |          |    |
|--------------|-----------|------------------|----------------|-----------------------------|----------|-------------------|-----|---|-----|----------|----|
| CLASS.NO.    |           | CP-P30/19-3S     |                |                             |          | 4322 021 02491    |     |   |     | 97-08-22 |    |
|              |           |                  |                |                             |          |                   |     |   |     | 00-07-24 |    |
| 00-07-24     |           |                  |                |                             |          |                   |     |   |     |          |    |
|              |           |                  |                |                             |          |                   |     |   |     |          |    |
|              |           |                  |                |                             |          |                   |     |   |     |          |    |
| NAME<br>NAAM | M.Veekens | SUPERS.<br>VERV. | 4322 021 30382 | 1                           | SH<br>BL | SH<br>BL          | 112 | - | 001 | 010      | A4 |
| MPA          |           | CHECK<br>CONTR.  | DAT. 97-08-22  | Property of<br>Eigendom van |          | © FERROXCUBE 2000 |     |   |     |          |    |