


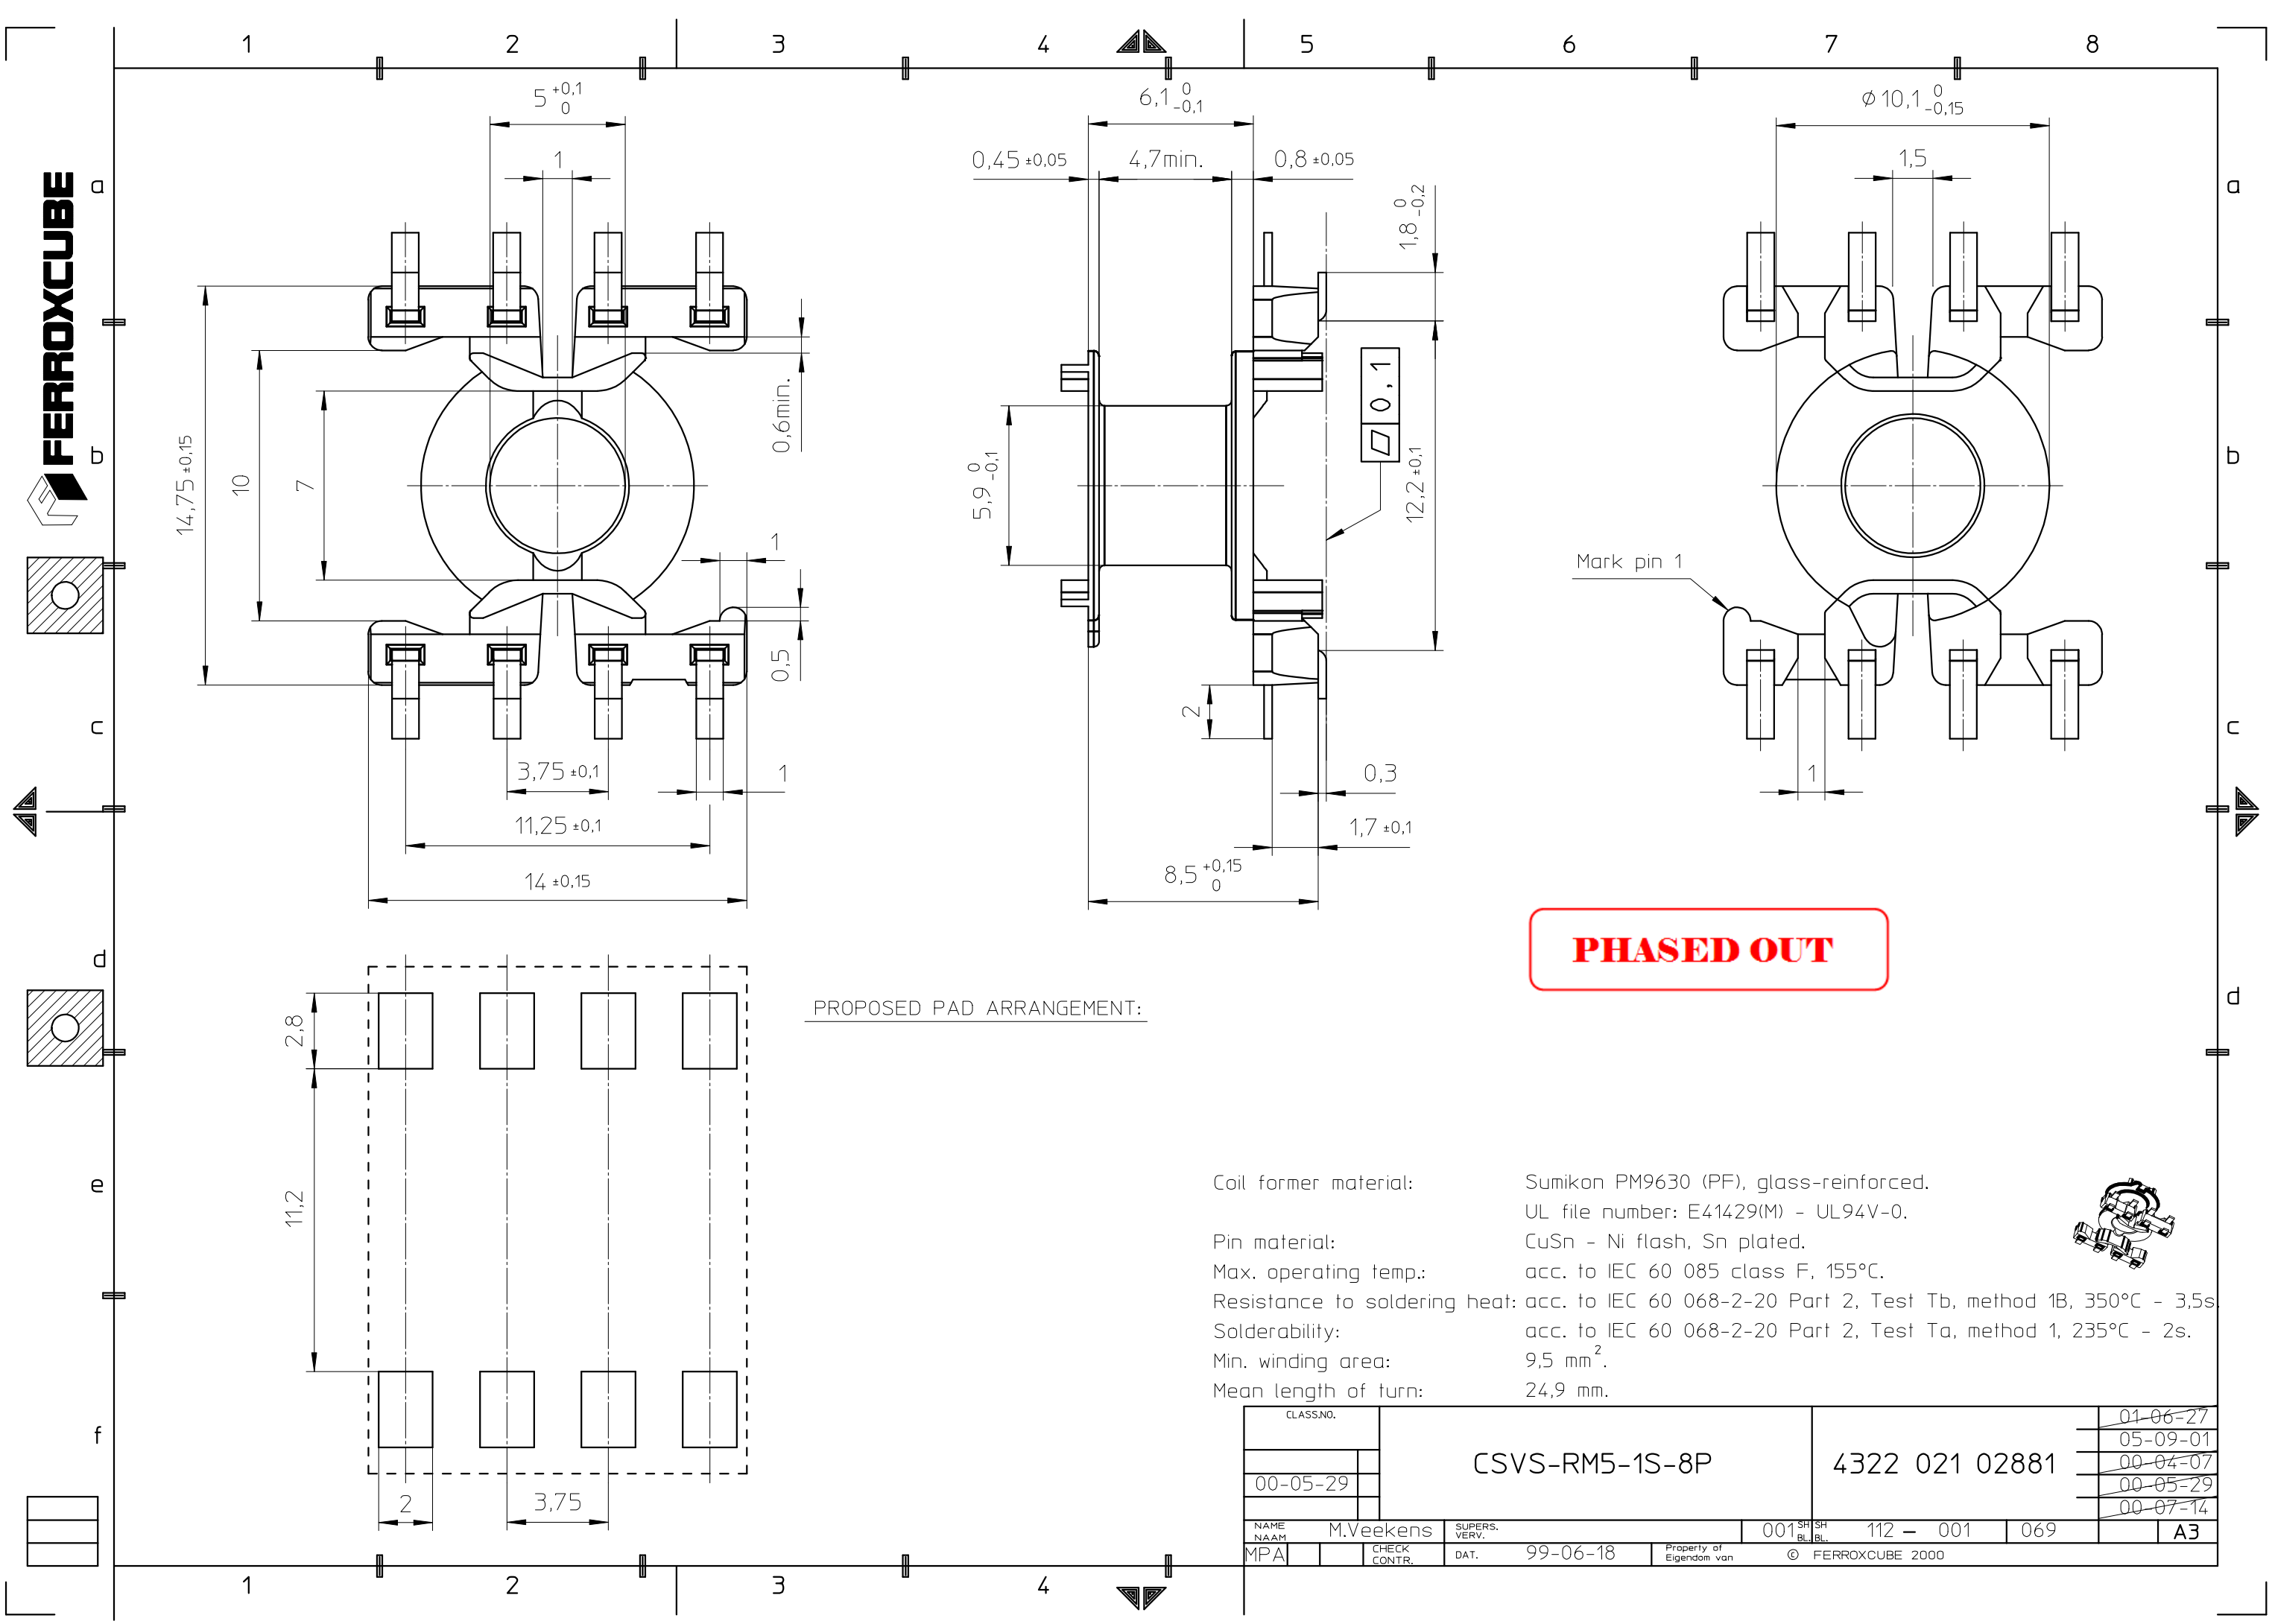

PROPOSED PAD ARRANGEMENT:

PHASED OUT

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V-0.

Pin material: CuSn - Ni flash, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.

Min. winding area: 9,5 mm².

Mean length of turn: 24,9 mm.



CLASS.NO.		CSVS-RM5-1S-8P				4322 021 02881				01-06-27							
												05-09-01					
00-05-29												00-04-07					
												00-05-29					
										00-07-14							
NAME NAAM		M.Veekens				SUPERS. VERV.		001SH BL.		112 — 001		069				A3	
MPA				CHECK CONTR.		DAT.		99-06-18		Property of Eigendom van		© FERROXCUBE 2000					