

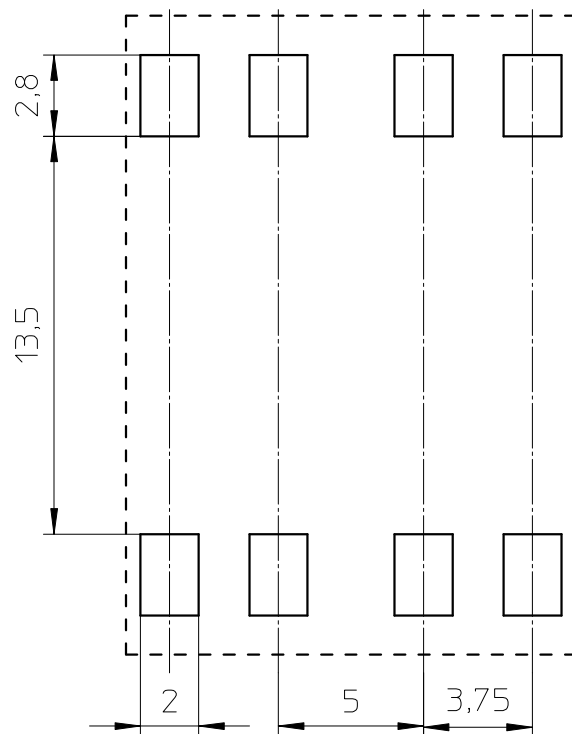
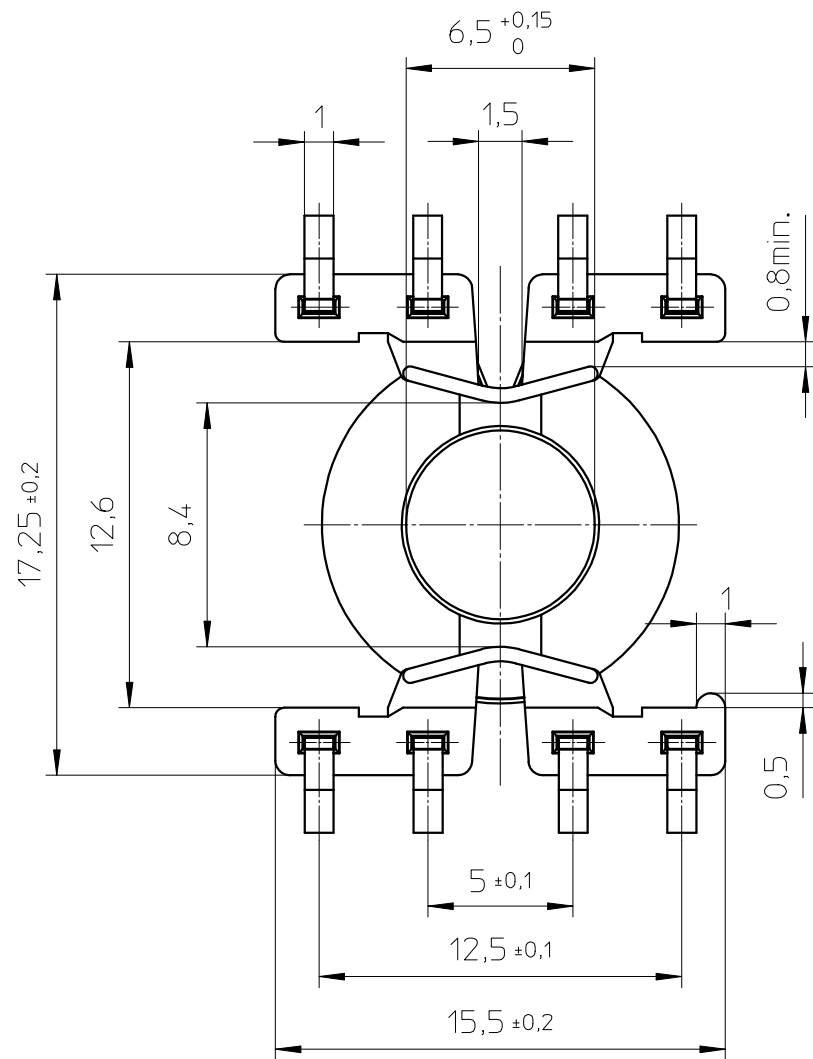





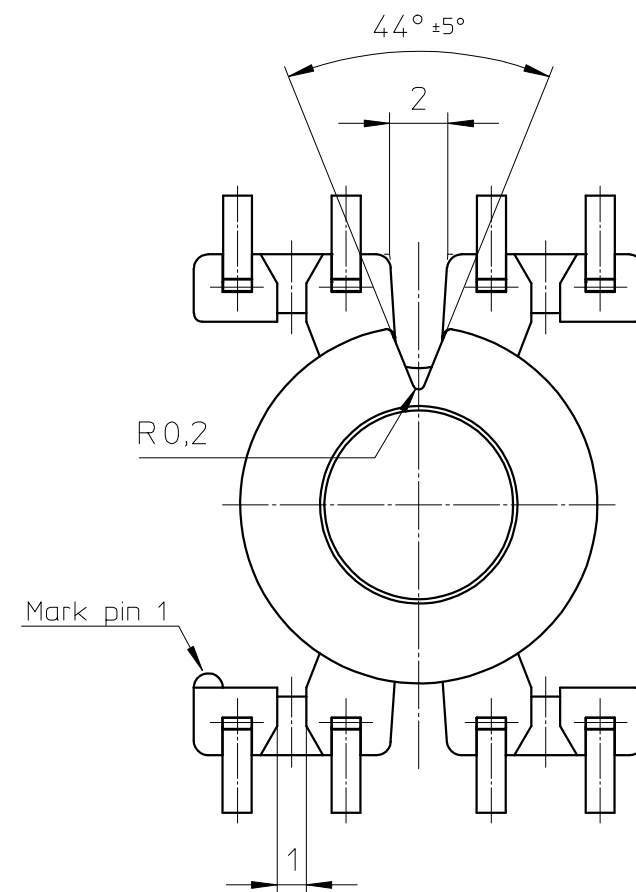

PROPOSED PAD ARRANGEMENT:

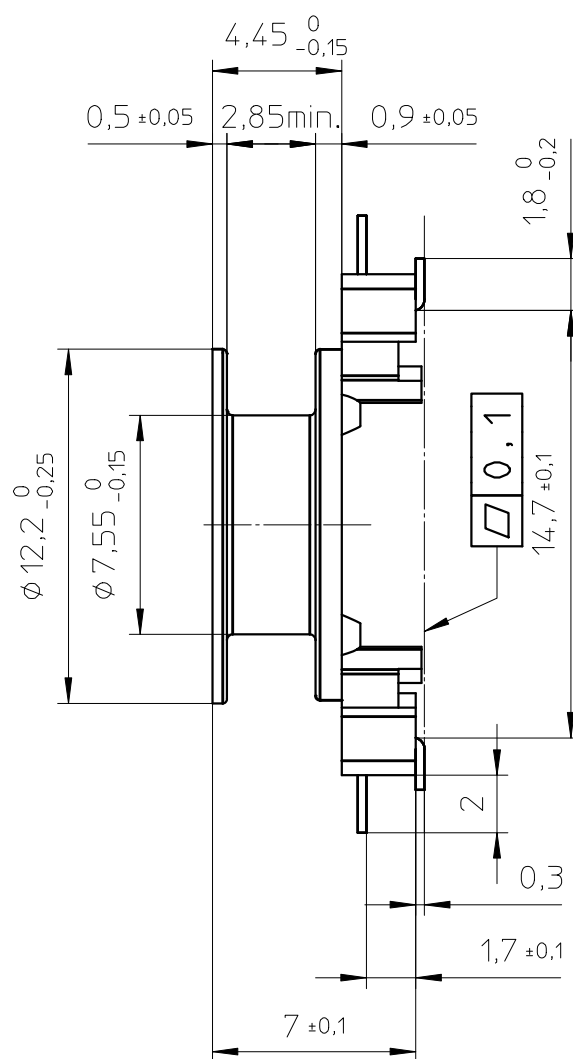

PHASED OUT

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V-0.

Pin material: CuSn, Sn plated.


Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.

Min. winding area: 6,3 mm².

Mean length of turn: 31 mm.



CLASS.NO.	CSVS-RM6S/LP-1S-8P		4322 021 02891		99-02-25
99-04-27					99-04-27
					99-08-17
					00-05-17
NAME NAAM	M.Veekens	SUPERS. VERY.	001	SH SH BL BL	112 - 001
MPA	CHECK CONTR.	DAT.	98-08-27	Property of Eigendom van	069
© FERROXCUBE 2000					A3