

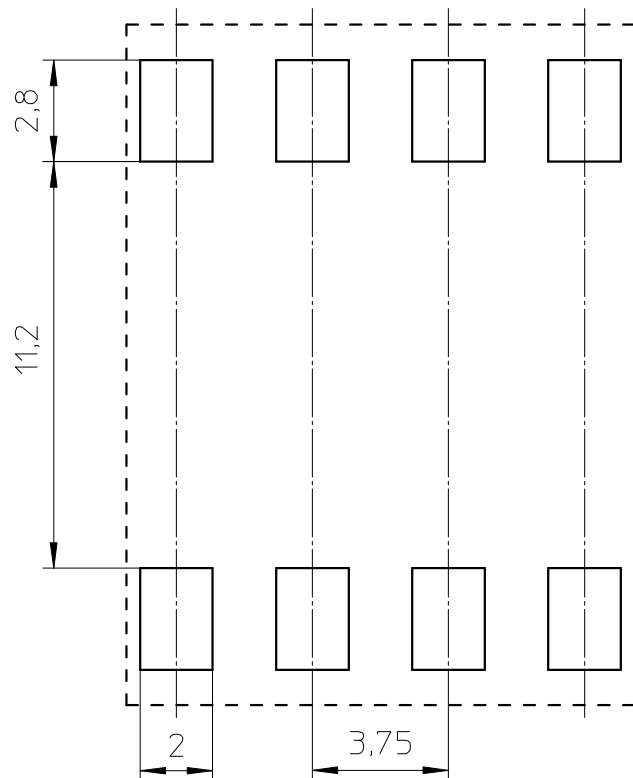
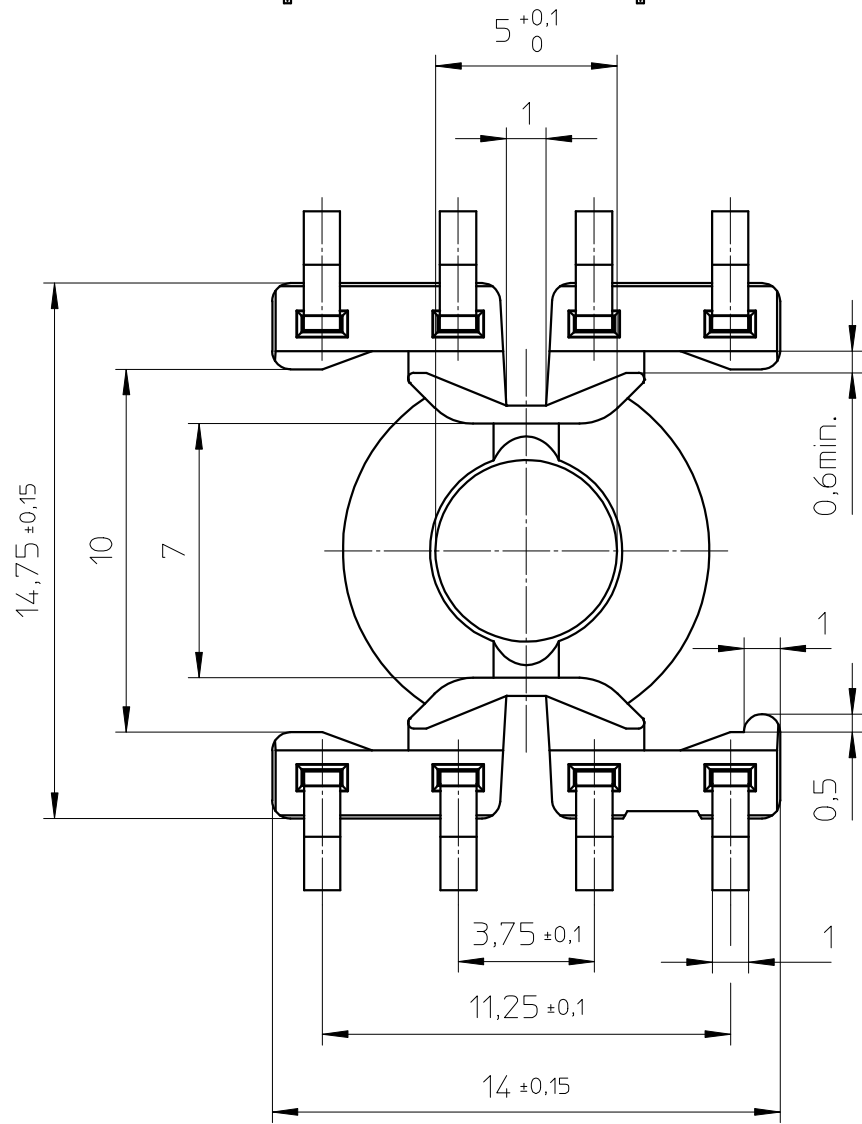




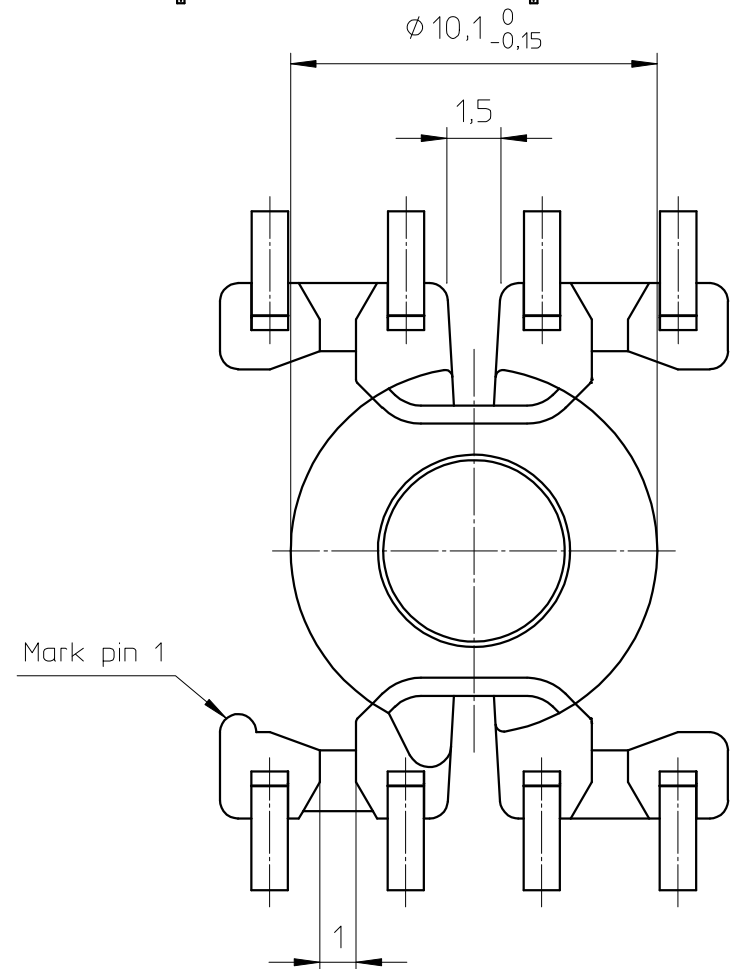

PROPOSED PAD ARRANGEMENT:

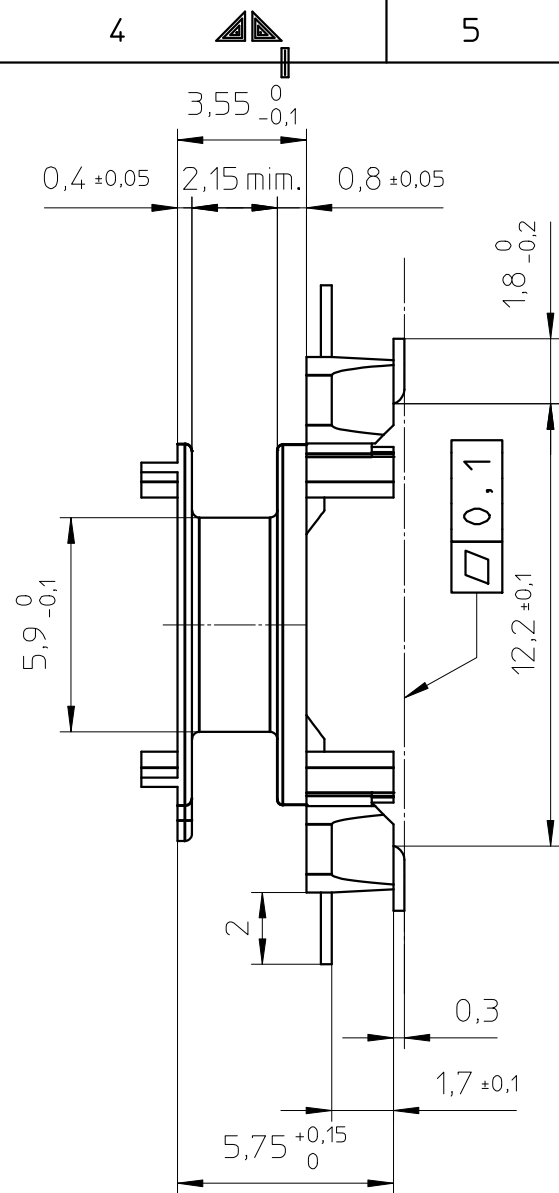

PHASED OUT

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V-0.

Pin material: CuSn - Ni flash, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.

Min. winding area: 4,7 mm².

Mean length of turn: 24,9 mm.



CLASS.NO.					00-07-14
					01-04-25
					01-06-27
01-06-27					03-06-02
					05-09-01
NAME NAAM	M.Veekens		SUPERS. VERV.	001 ^{SH} BL.	112 - 001
MPA	CHECK CONTR.	DAT.	99-06-25	Property of Eigendom van	© FERROXCUBE 2000
CSVS-RM5/LP-1S-8P					4322 021 02941
					069
					A3