
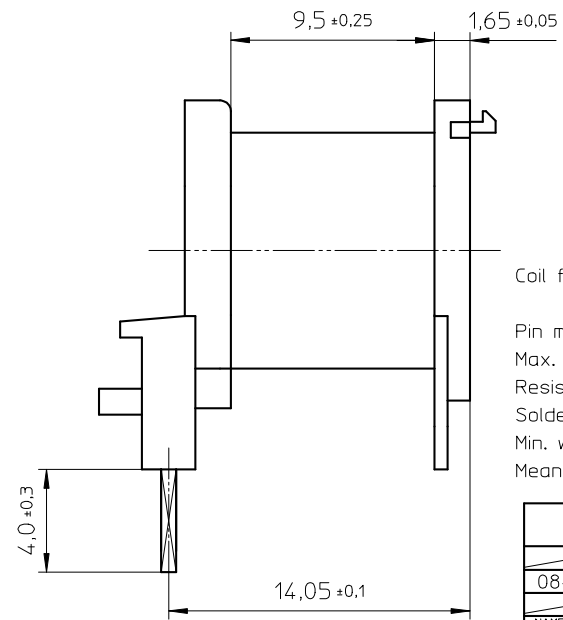
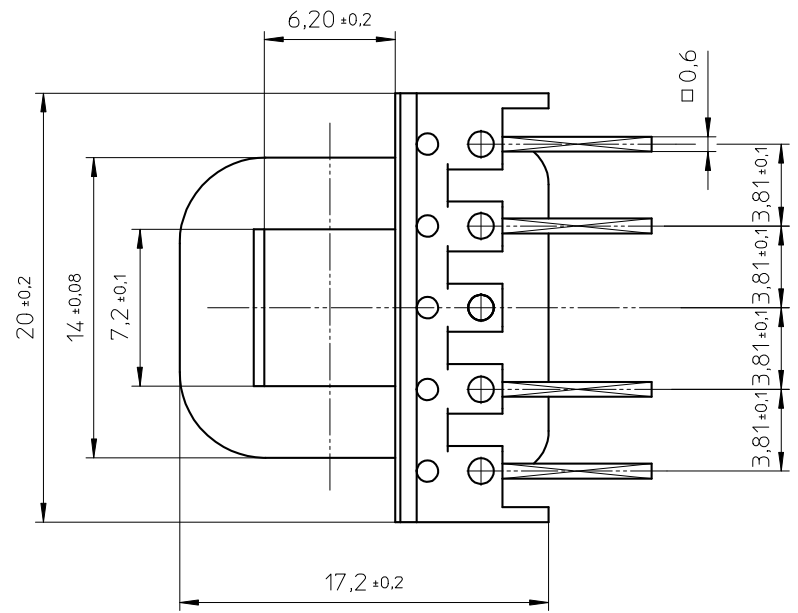
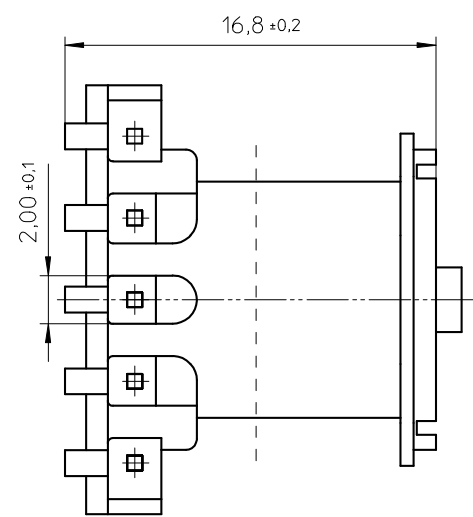


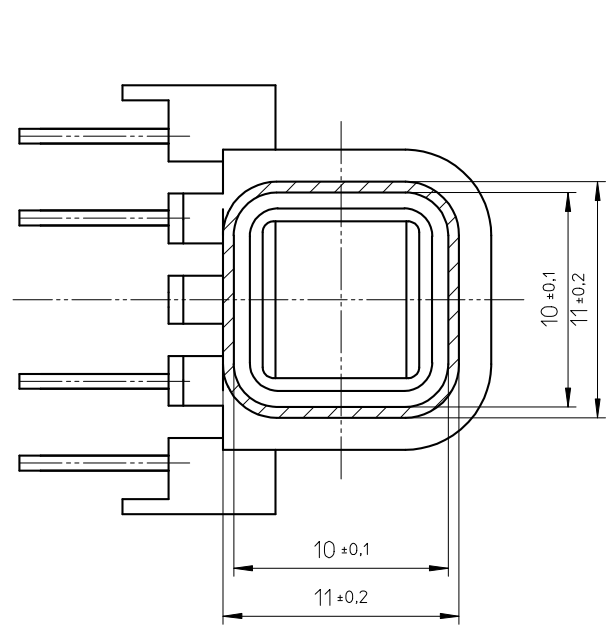

Coil former material: Ultramide A3X2G7 (PA6.6), glass-reinforced.
 UL file number: E41871(M) - UL94V-0.
 Pin material: Copper-plated steel wire, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class B, 130°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 13.1 mm².
 Mean length of turn: 50 mm.

CLASSNO.						08-02-20		08-06-13		08-06-23	
		CPC0-E20/6-1S-4P-UZ				4322 021 06991					
NAME NAAM	M.Trynqiel	SUPERS. VERV.		001	SPRSH BL BL	112	001	069			A3
MPA	CHECK CONTR.	DAT.	08-02-20	Property of Eigendom van		© FERROXCUBE 2008					