

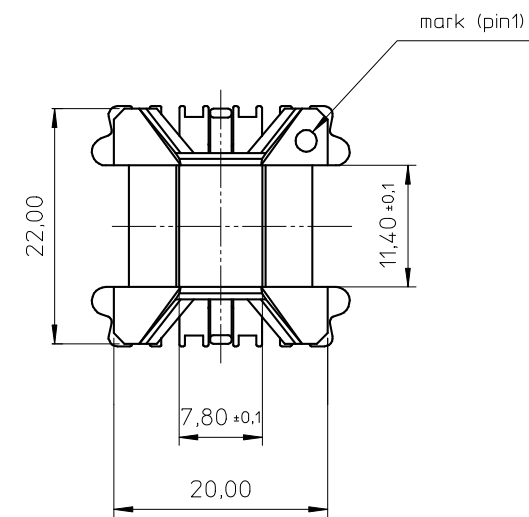
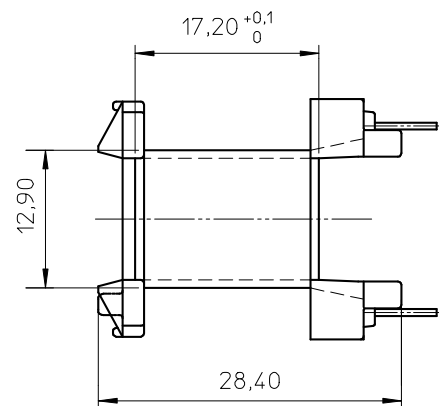
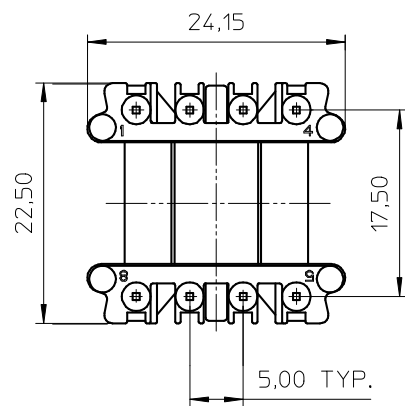


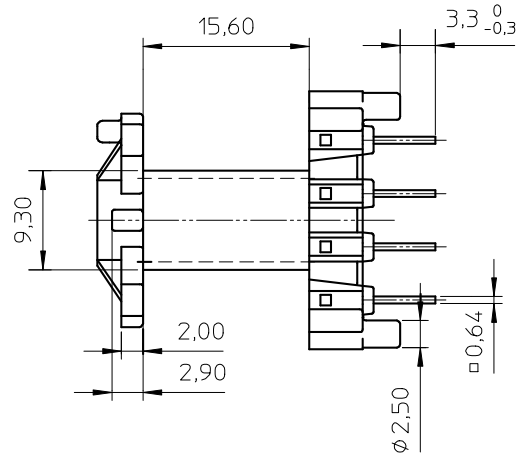

PROPOSED
HOLE PATTERN :

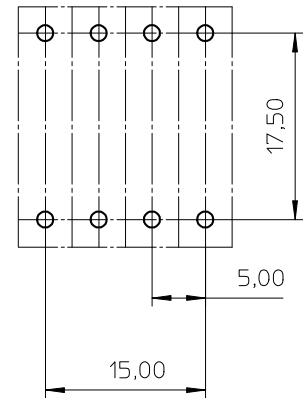


Coil former material: Rynite FR 530 (PET), glass-reinforced.
UL file number: E41938 - UL94V-0.

Pin material: Copper-plated steel wire - Sn plated.
Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s



CLASSNO.		CPV-E25/13/11-1S-8P		4322 021 07101		2009-04-16	
NAME NAAM		M.Trynqiel		SUPERS. VERV.		001	
MPA		CHECK CONTR.		DAT.		2009-04-16	
				Property of Eigendom van		© FERROXCUBE 2009	
				SPRSH BL BL		112 - 001	
						010	
						A3	