
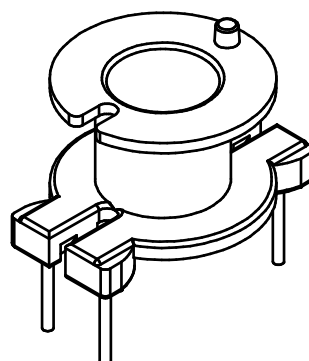
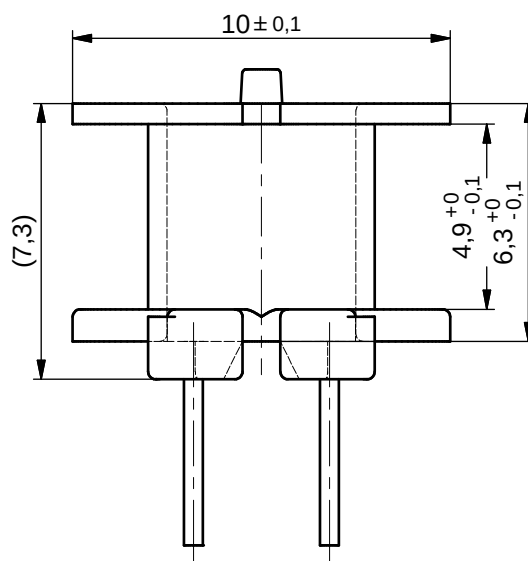
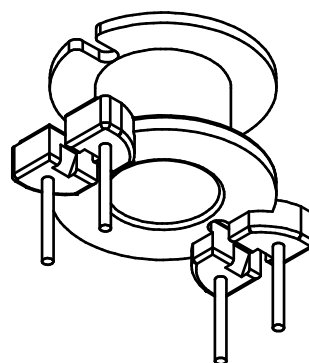
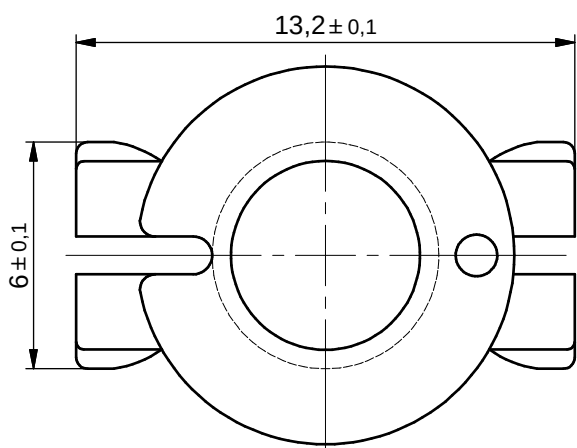
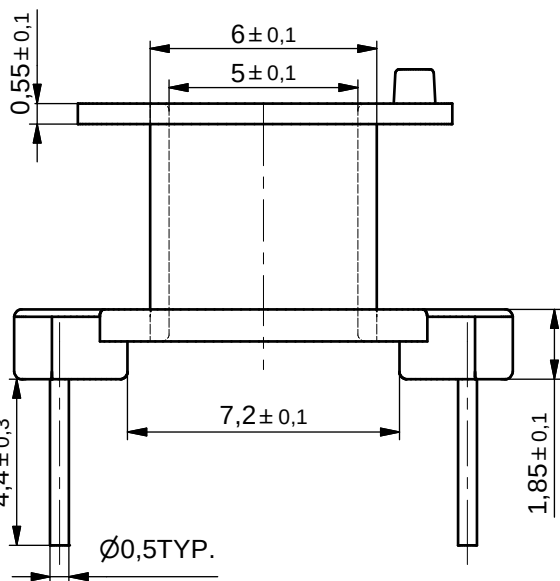
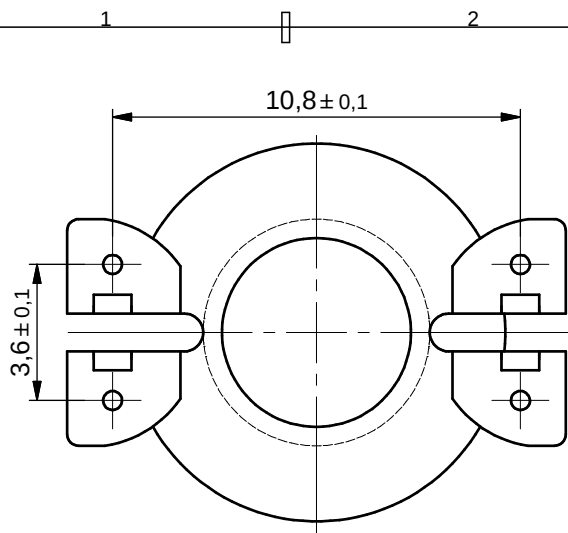





Coil former material: Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V - 0
Pin material: Cooper-clad steel wire, Sn plated.
Max. operatin temp.: acc. to IEC 60 085 class F, 155 C
Max.winding area: 9.1 mm²
Mean length of turn: 25 mm

CLASS.NO.	CSV-RM5-1S-4P-C				5	
					4	
					3	
					2	
					1	12-03-2014
NAME M. Marszalek	SUPERS.	001	SH BL	SH BL	112 - 001	010
DATE:		Property of	FERROXCUBE Polska Sp. z o.o.			A4