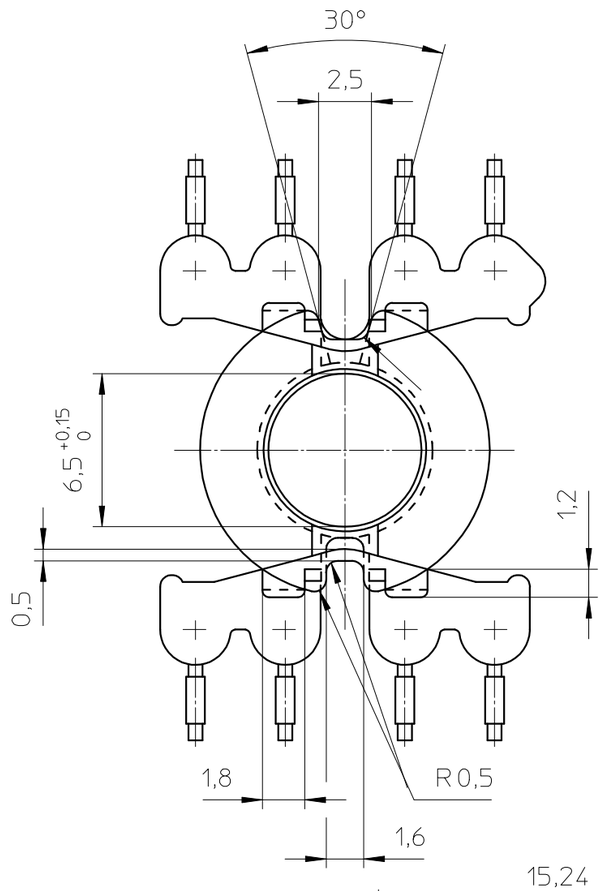

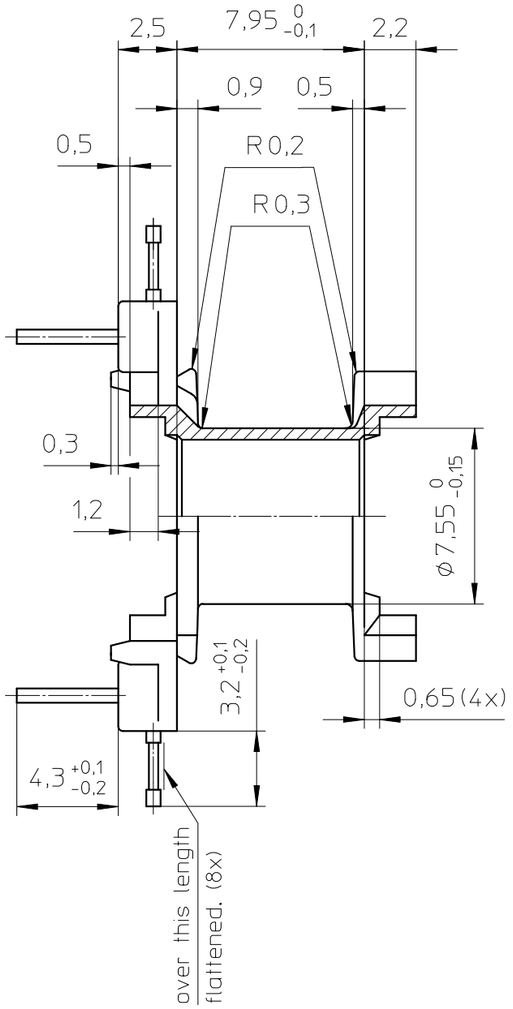

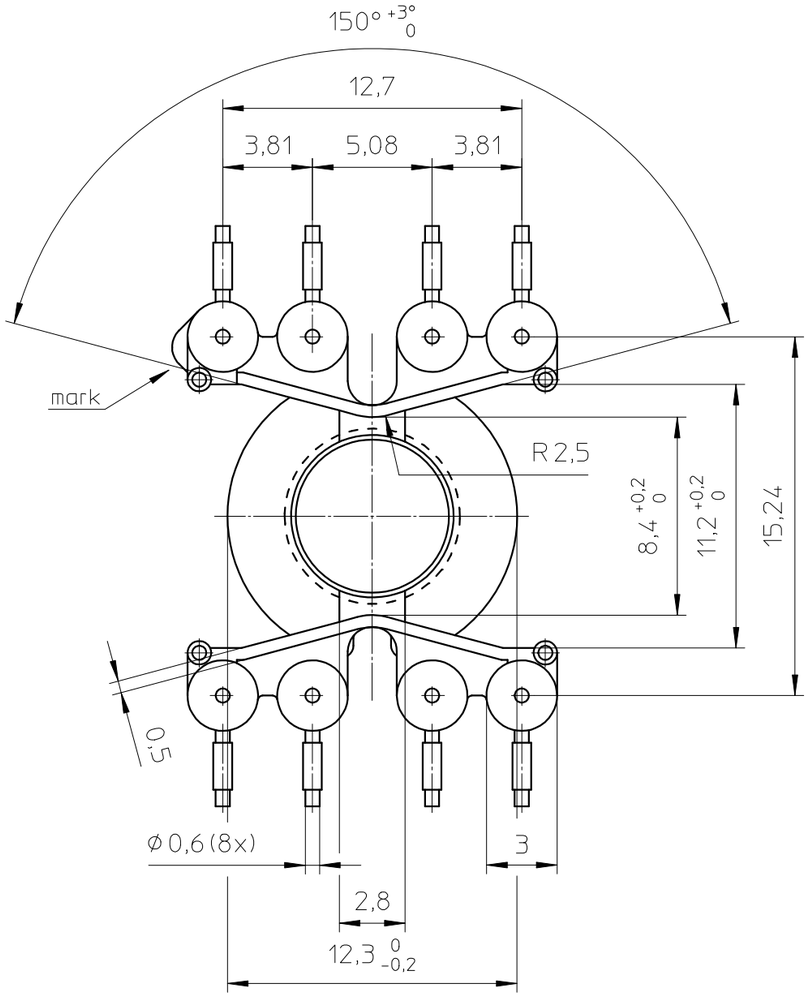

PHASED OUT

HOLE PATTERN :

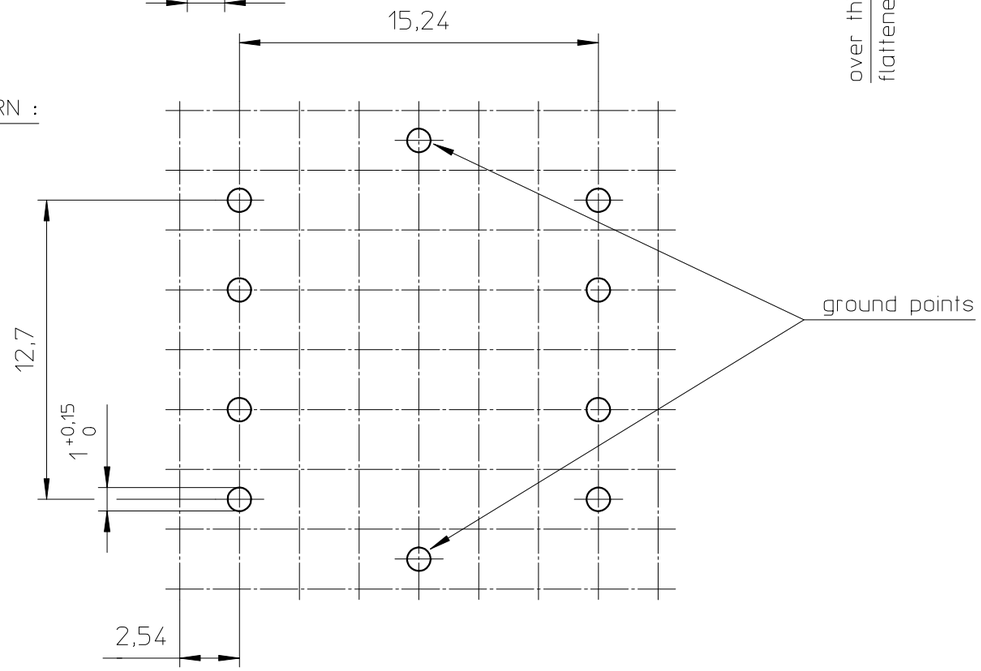

Coil former material:	Valox 420SEO (PBT), glass-reinforced. UL file number: E45329(R) - UL94V-0.
Pin material:	CuSn - Ni flash, Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class F, 155°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
Min. winding area:	15 mm^2.
Mean length of turn:	30,8 mm.

CLASS.NO.	CPV-RM6S/I-1S-8PD	4322 021 34042	~~95-09-06~~ ~~96-07-26~~ ~~99-04-26~~ ~~00-04-13~~ 2004-09-28
00-04-13			
NAME NAAM M.Veekens	SUPERS. VERV.	001 SH BL. SH BL. 112 – 001	010 A3
MPA CHECK CONTR.	DAT. 91-06-21	Property of Eigendom van © FERROXCUBE 2000	