

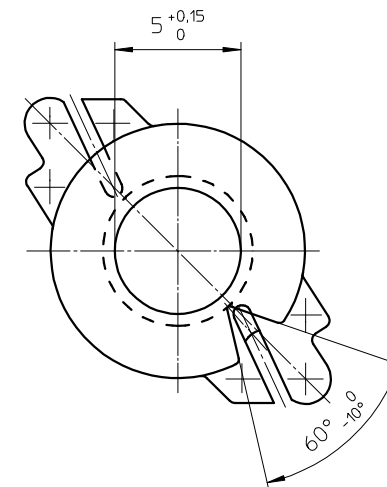
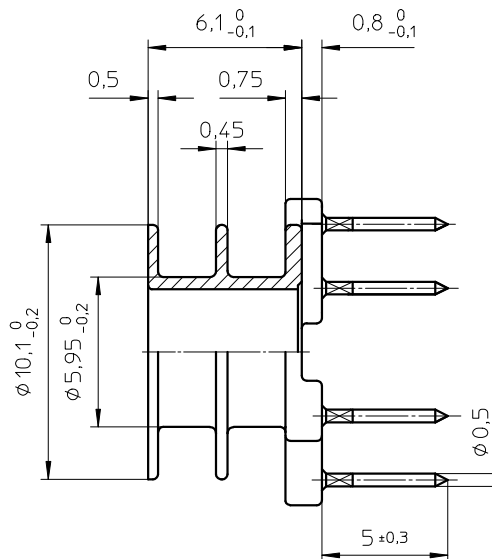


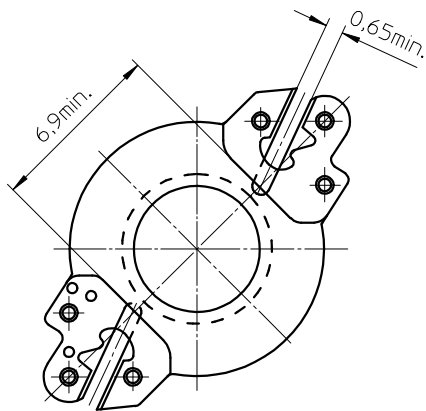

PHASED OUT

HOLE PATTERN:

Space requirement 5x5 pitch.

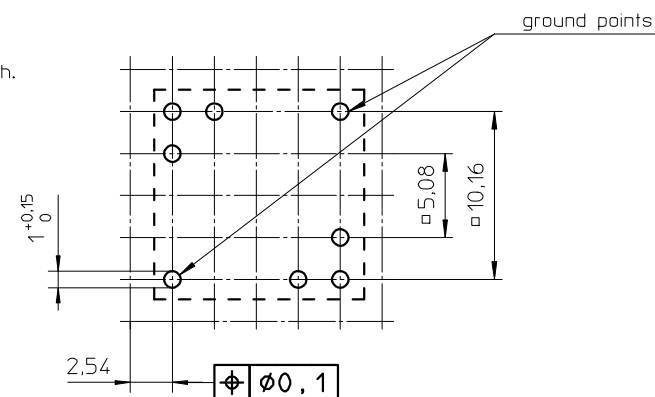

Coil former material: Bakelite UP 3420 (UP), glass-reinforced.
UL file number: E61040 - UL94V-0.

Pin material: CuSn - Ni flash, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area: 9.2 mm².

Mean length of turn: 24.9 mm.

CLASSNO.	CSV-RM5-2S-6P		4322 021 34501		97-04-18
90-01-26					00-05-02
NAME	M. Veekens	SUPERS.	1	112 - 001	00-08-01
MPA	CHECK	DAT.	89-04-03	Property of	03-06-30
	CONTR.			Eigendom van	05-09-01
				© FERROXCUBE 2000	A3