

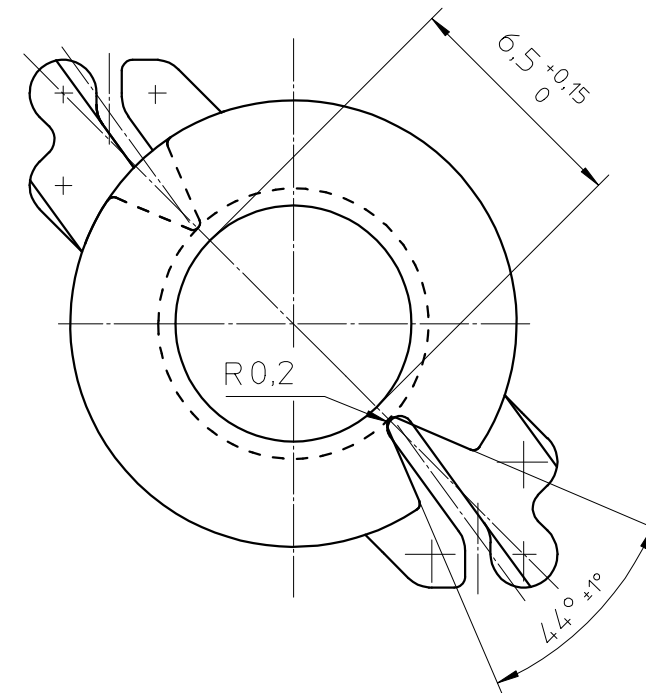
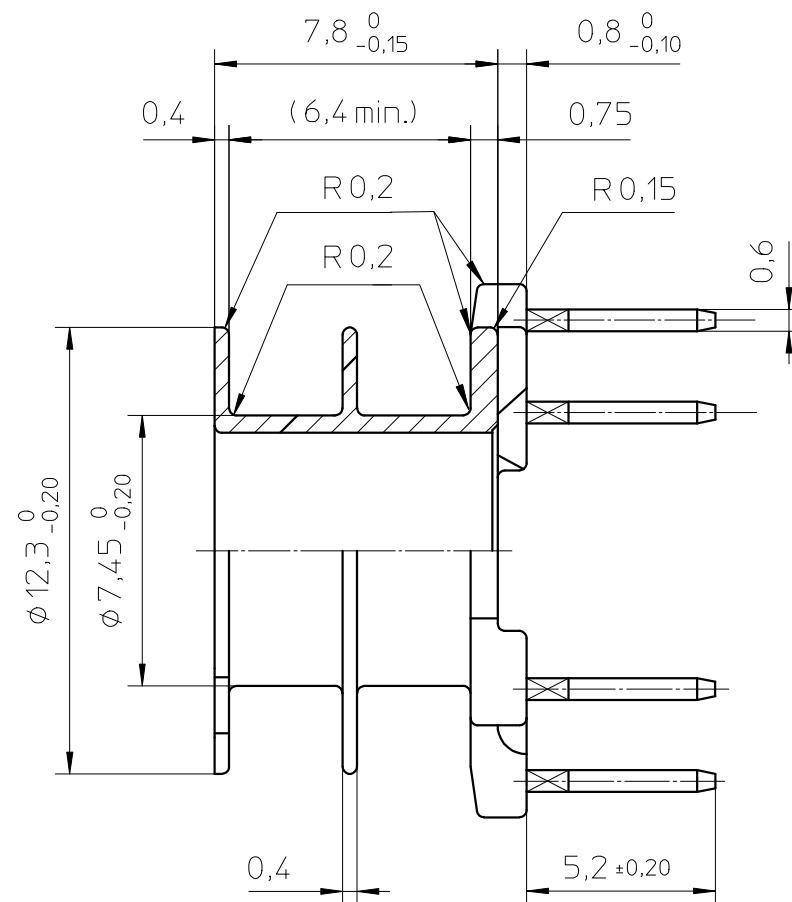


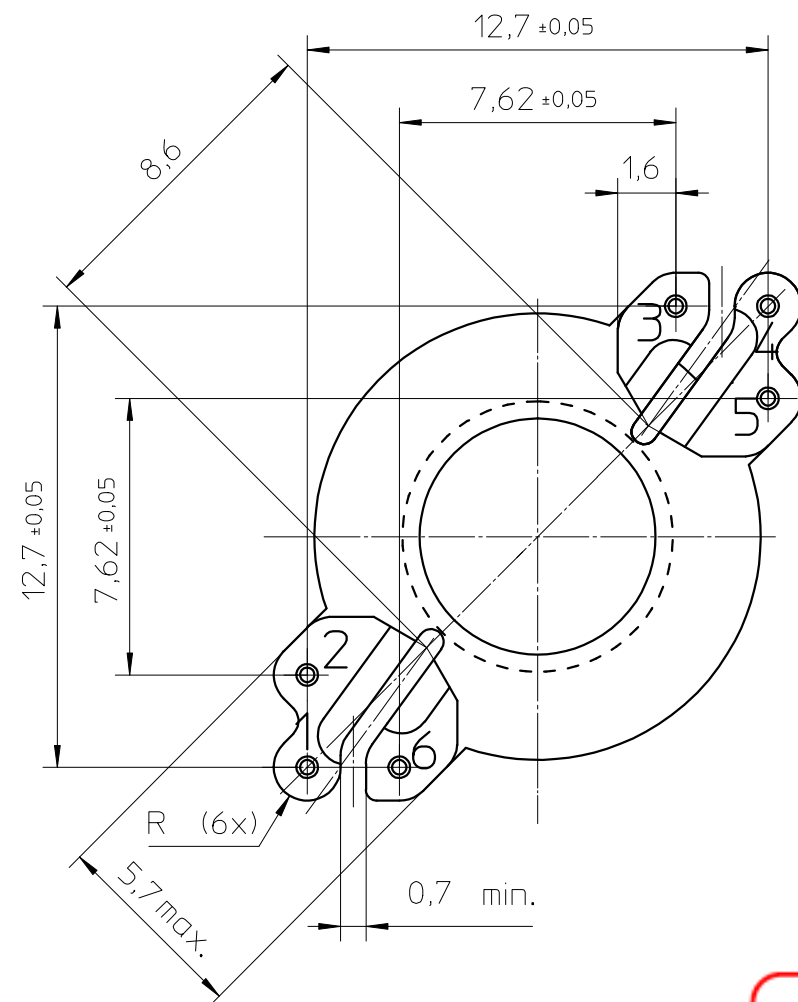

PHASED OUT

HOLE PATTERN:

Space requirement 6x6 pitch.

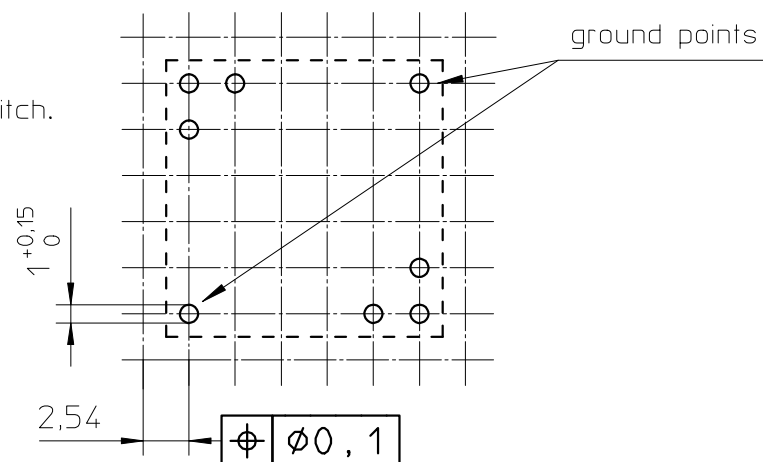

Coil former material: Vyncolite X611 (PF), glass-reinforced.
UL file number: E167521(M) - UL94V-0.
Pin material: CuSn - Ni flash, Sn plated.
Max. operating temp.: acc. to IEC 85 class H, 180°C.
Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.
Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
Min. winding area: 14 mm².
Mean length of turn: 30 mm.

CLASS.NO.			89-11-21
			90-05-16
			94-03-18
			97-04-18
			06-09-20
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1 SH SH 112 - 001 010
MPA	CHECK CONTR.	DAT.	89-11-21
		Property of Eigendom van	© FERROXCUBE 2000

CSV-RM6R-2S-6P

4322 021 34561

A3