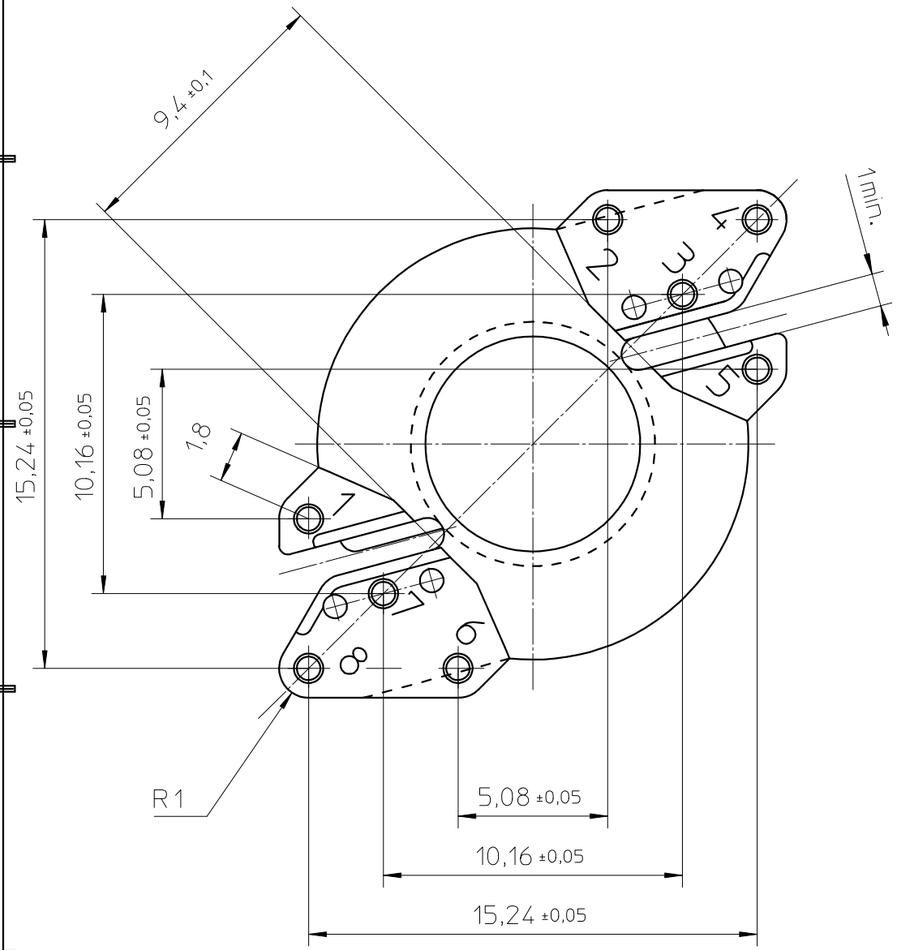

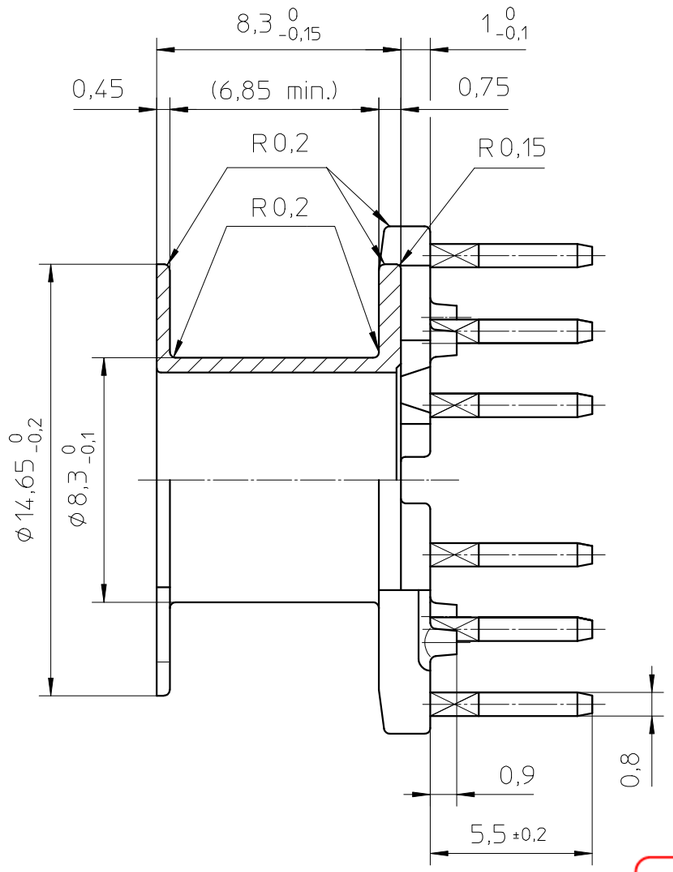

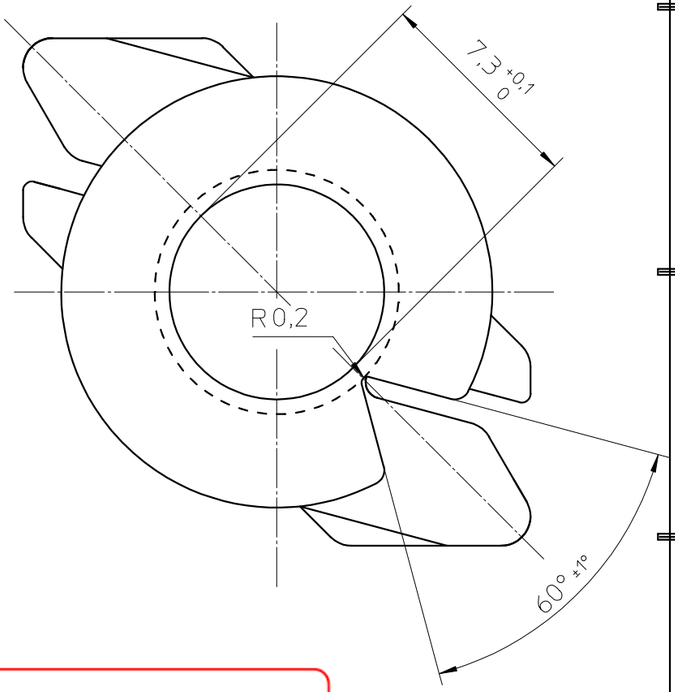

PHASED OUT

HOLE PATTERN:

Space requirement 7x7 pitch.

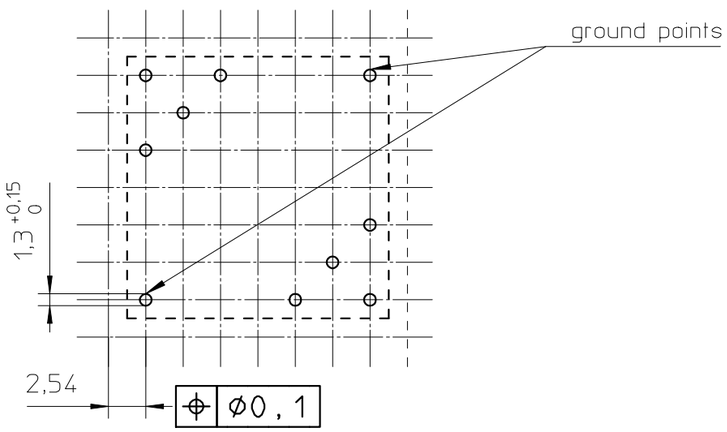

Coil former material:	Vyncolite X611 (PF), glass-reinforced.
	UL file number: E167521(M) - UL94V-0.
Pin material:	CuSn - Ni flash, Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class H, 180°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
Min. winding area:	21 mm ^{2}.
Mean length of turn:	35 mm.

CLASS.NO.	CSV-RM7-1S-8P	4322 021 34631	89-11-21 ~~90-05-16~~ ~~97-04-18~~ 05-09-01		
NAME NAAM M.Veekens	SUPERS. VERV.	1	SH BL. SH BL. 112 – 001	010	A3
MPA CHECK CONTR.	DAT. 89-11-21	Property of Eigendom van	© FERROXCUBE 2000		