

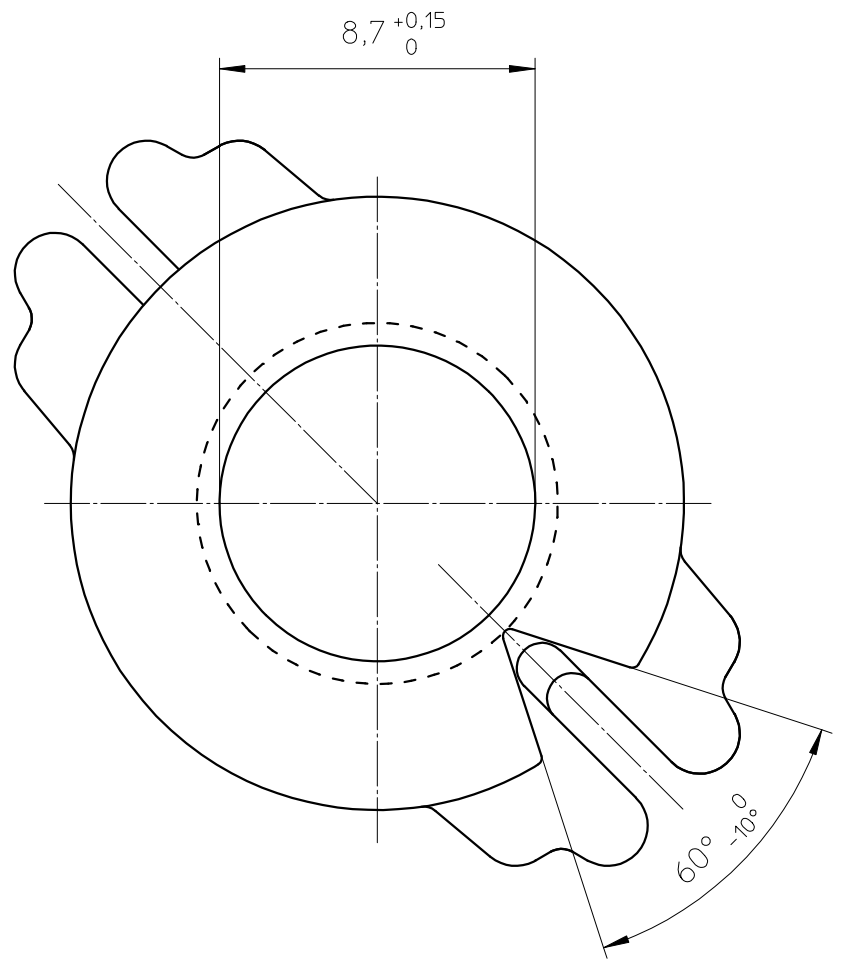
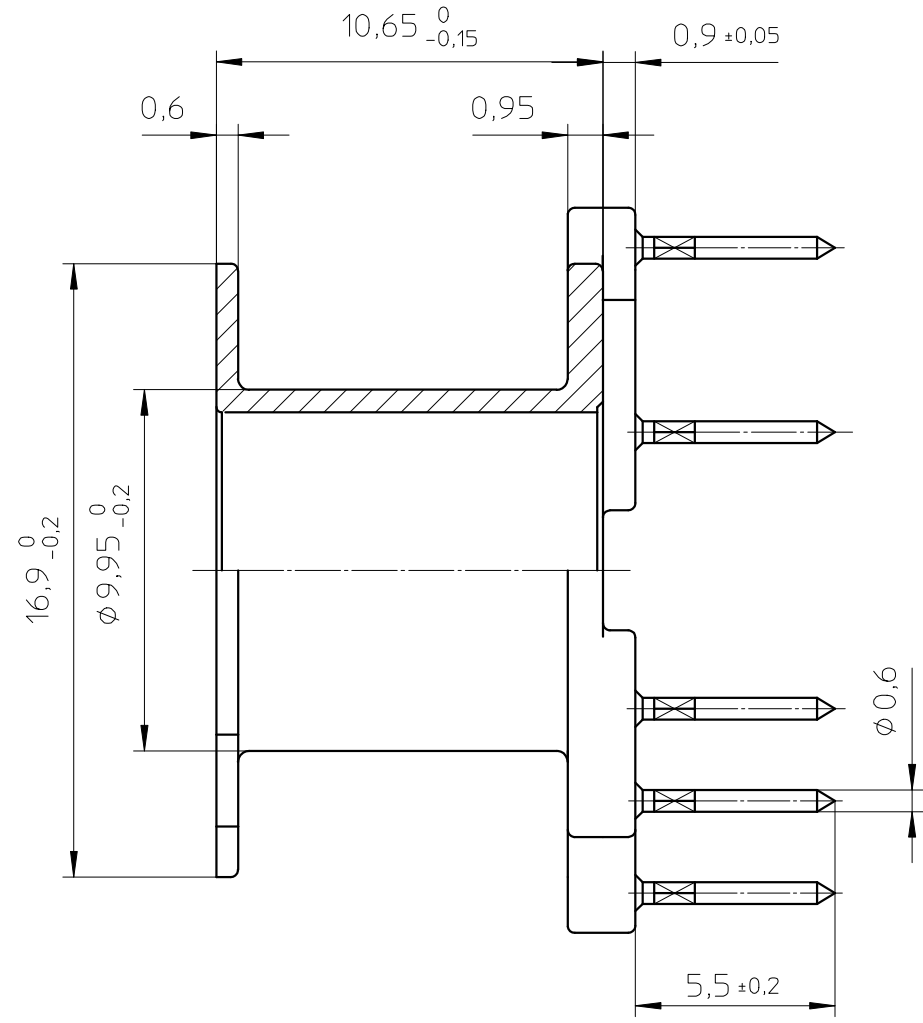


FERROXCUBE

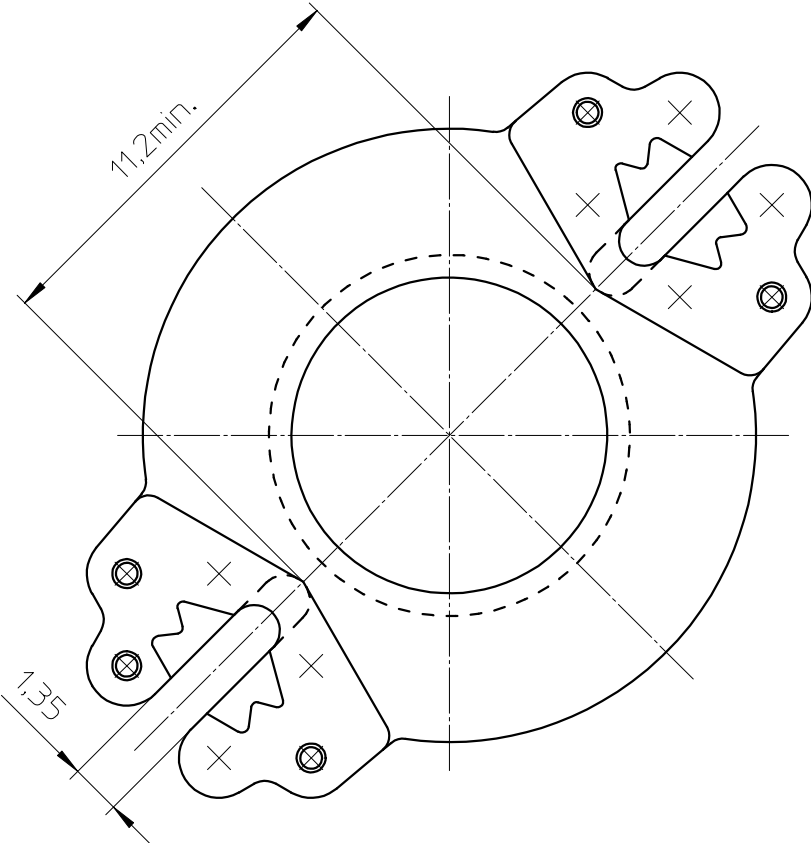

PHASED OUT

HOLE PATTERN:
Space requirement 8x8 pitch.

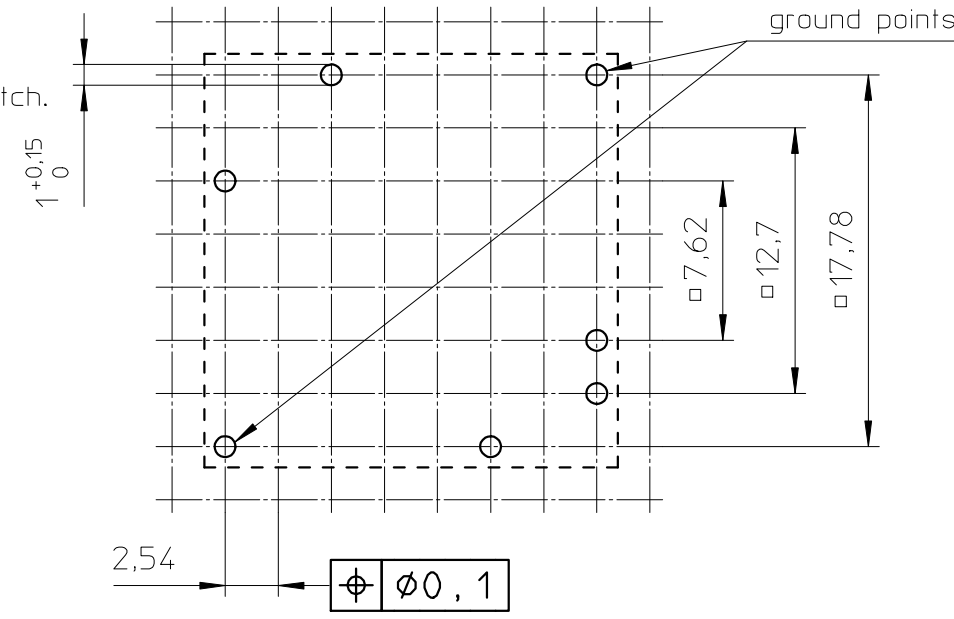

Coil former material: Bakelite UP 3420 (UP), glass-reinforced.
UL file number: E61040 - UL94V-0.
Pin material: CuSn - Ni flash, Sn plated.
Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
Min. winding area: 30 mm².
Mean length of turn: 42 mm.

CLASS.NO.		CSV-RM8-1S-5P		4322 021 34661		04-09-28											
						05-09-01											
89-12-15						27-04-18											
						00-05-02											
						00-08-01											
NAME NAAM		M.Veekens		SUPERS. VERV.		1		SH BL		112 - 001		010				A3	
MPA				CHECK CONTR.		DAT.		89-03-15		Property of Eigendom van		© FERROXCUBE 2000					