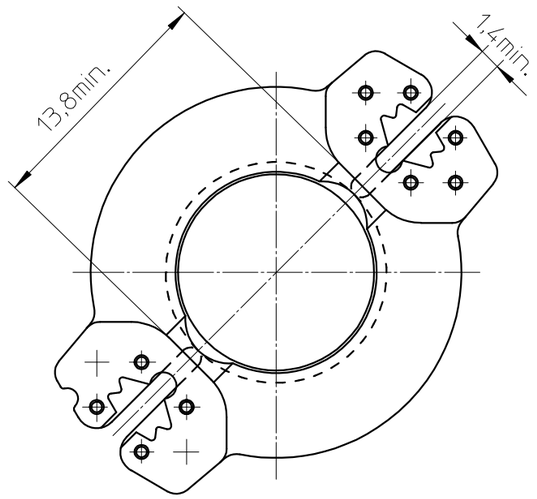

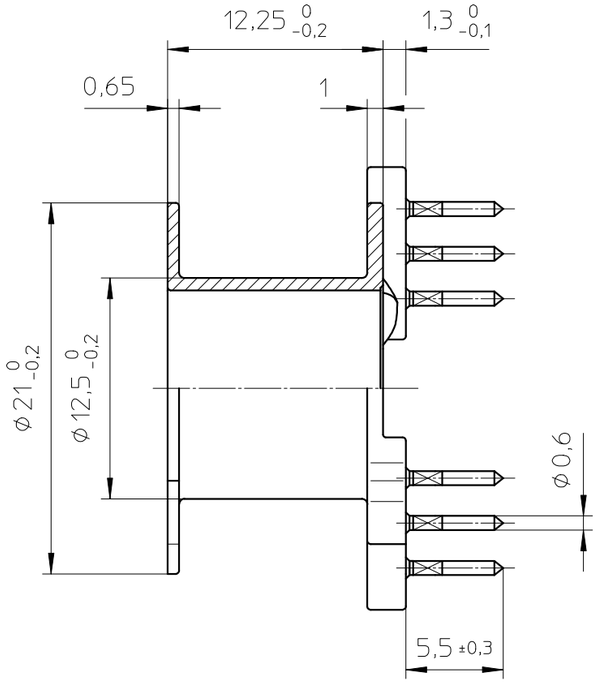

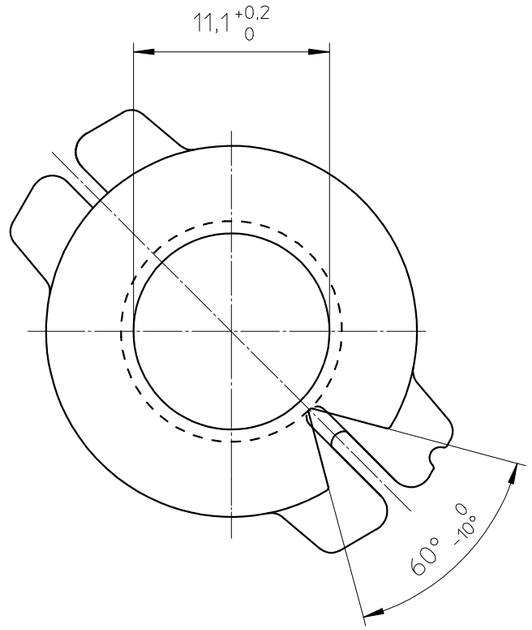

PHASED OUT

HOLE PATTERN:
Space requirement 10x10 pitch

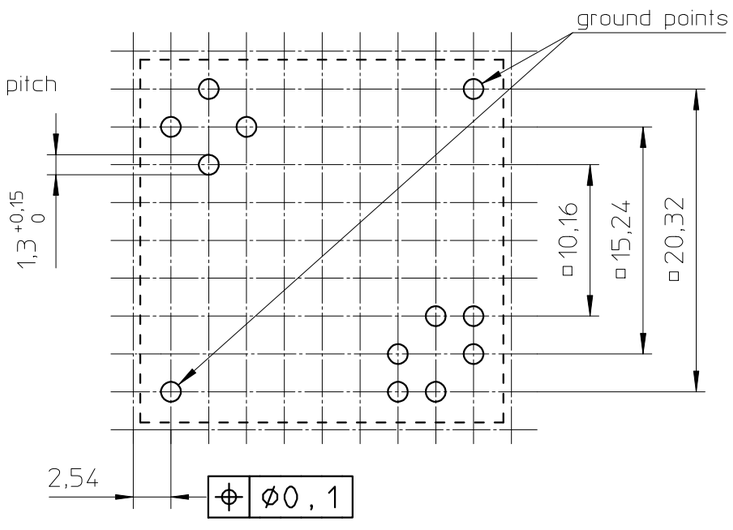

Coil former material: Bakelite UP 3420, glass-reinforced
UL file number: E61040 - UL94V-0.
Pin material: CuSn - Ni flash, Sn plated.
Max. operating temp.: acc. to IEC 60 085 class F, 155°C
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B 350°C-3,5sec.
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2sec.
Winding area: 42,7 mm.^{2}
Mean length of turn: 52,3mm.

CLASS.NO.	CSV-RM10-1S-10P	4322 021 34741	~~2004-09-28~~
			2005-09-01
90-01-26			~~97-04-18~~
			~~2000-05-02~~
			~~2000-08-01~~
NAME M.Veekens / NAAM MPA	SUPERS. VERV. / CHECK CONTR.	1 SH / SH BL. 112 – 001	010 / A3
	DAT. 89-04-05	Property of Eigendom van © FERROXCUBE 2000	