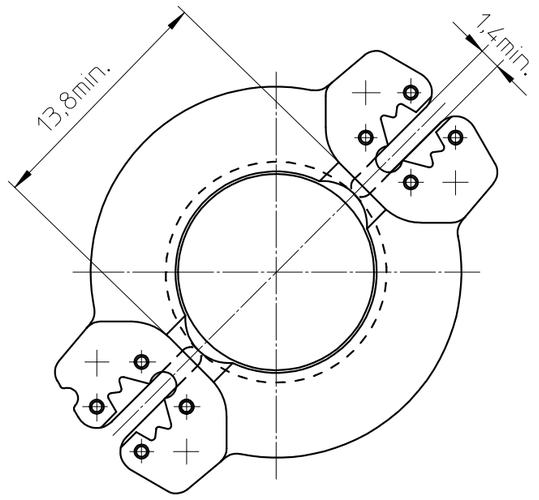

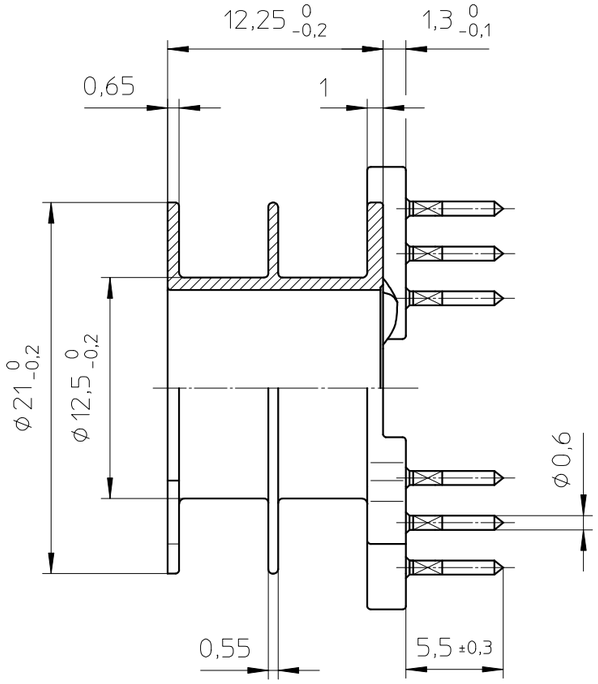

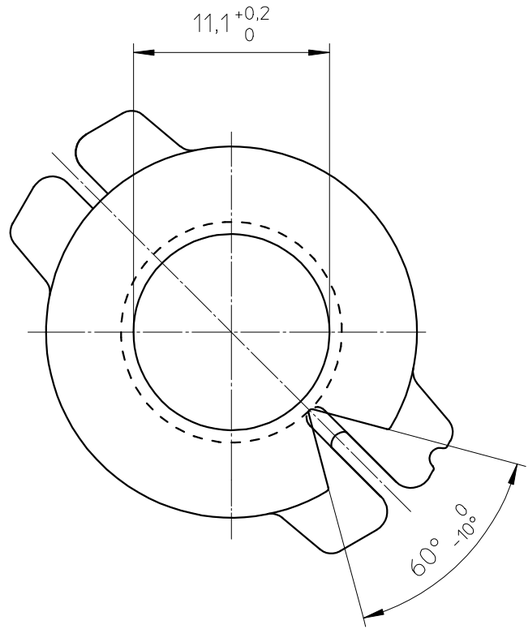

PHASED OUT

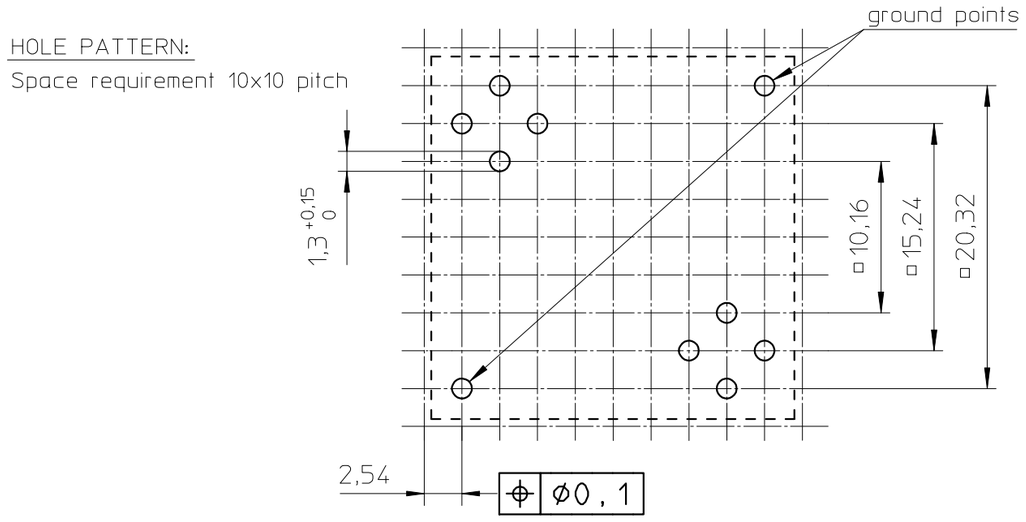

Coil former material: Bakelite UP 3420, glass-reinforced
UL file number: E61040 - UL94V-0.
Pin material: CuSn - Ni flash, Sn plated.
Max. operating temp.: acc. to IEC 60 085 class F, 155°C
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B 350°C-3,5sec.
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2sec.
Winding area: 42,7 mm.^{2}
Mean length of turn: 52,3mm.

CLASS.NO.	CSV-RM10-2S-8P	4322 021 34782	04-09-28 2005-09-01 97-04-18 00-05-02 00-08-01
90-01-26			
NAME NAAM M.Veekens	SUPERS. VERV.	1 SH BL. SH 112 – 001	010 A3
MPA CHECK CONTR.	DAT. 89-04-05	Property of Eigendom van © FERROXCUBE 2000	