

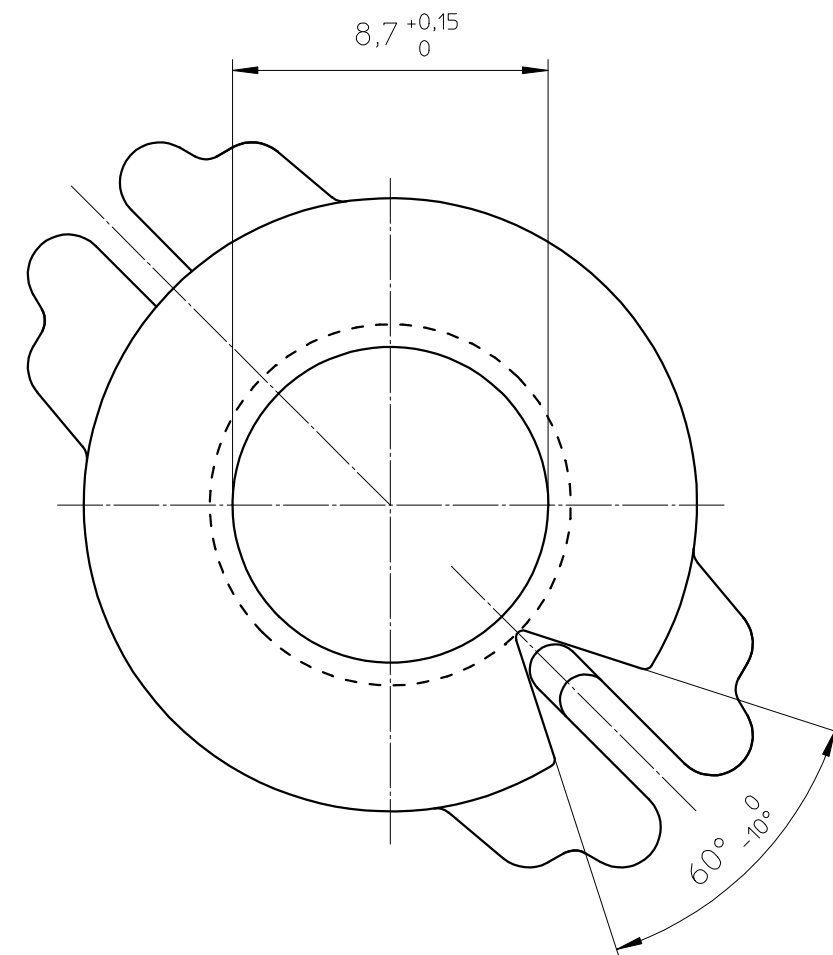
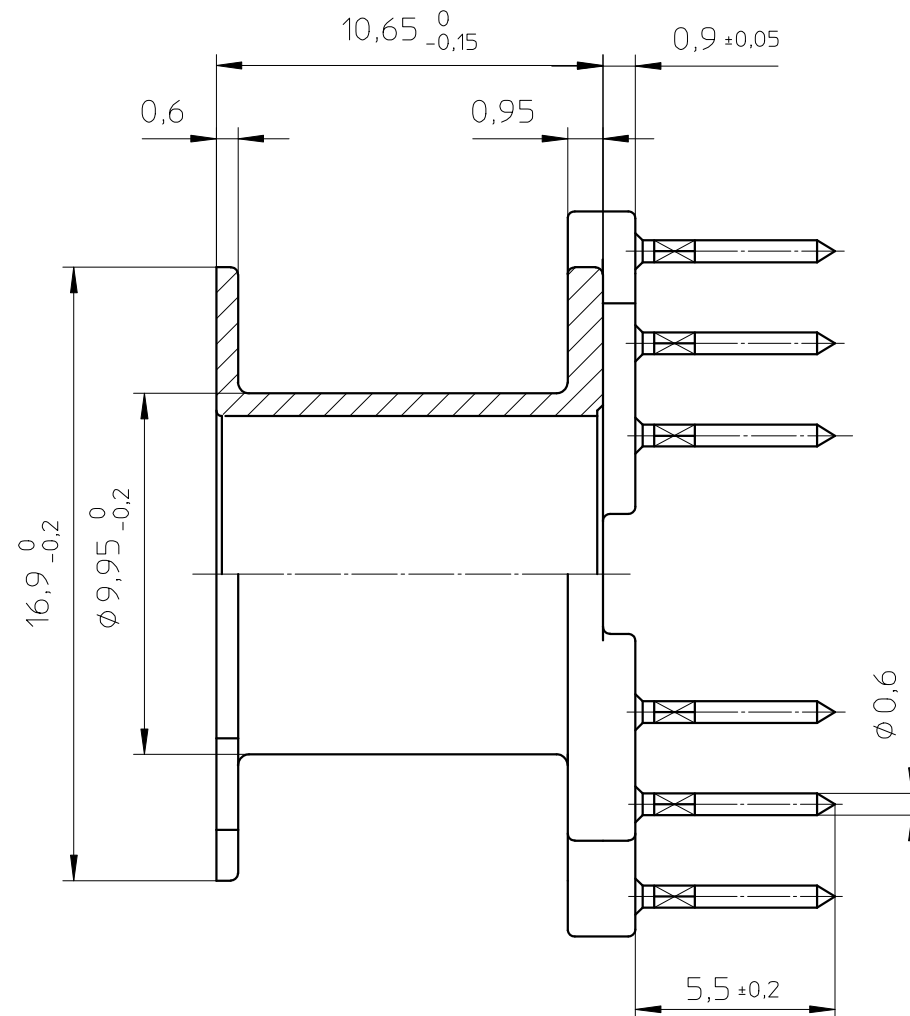
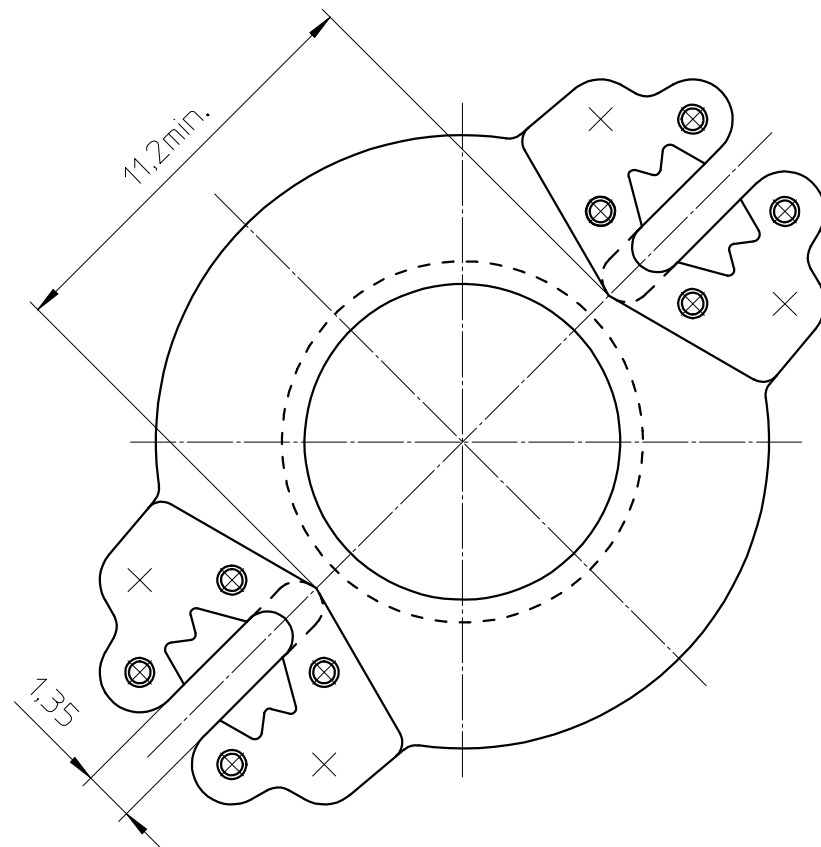






PHASED OUT

HOLE PATTERN:

Space requirement 8x8 pitch.

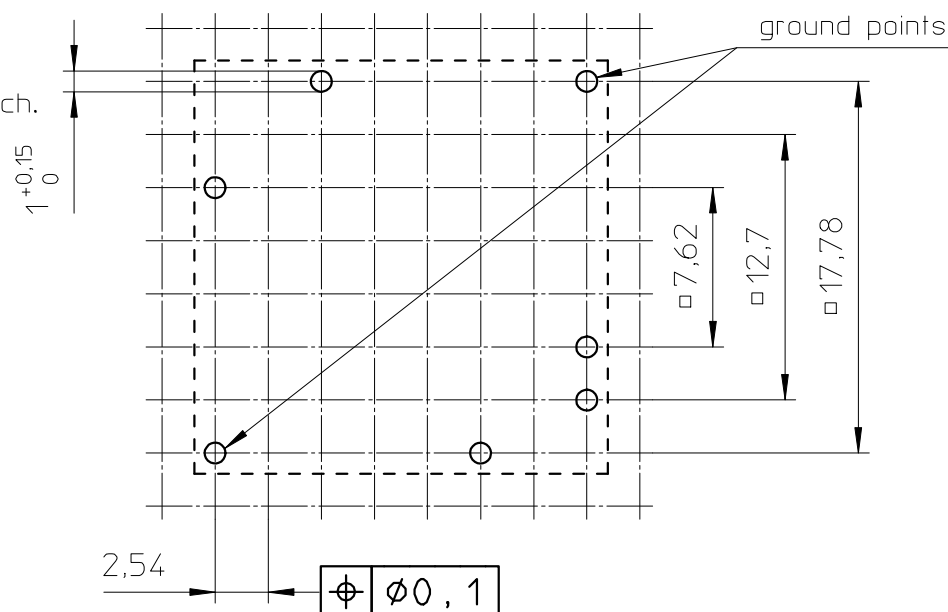

Coil former material: Bakelite UP 3420 (UP), glass-reinforced.
UL file number: E61040 - UL94V-0.

Pin material: CuSn - Ni flash, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area: 30 mm².

Mean length of turn: 42 mm.

CLASS.NO.					04-09-28
					2005-09-01
					97-04-18
					00-05-02
					00-08-01
NAME NAAM	M.Veekens		SUPERS. VERV.	1	SH SH BL BL
MPA			CHECK CONTR.		
	89-12-15		DAT.	89-08-15	Property of Eigendom van
					© FERROXCUBE 2000
					112 - 001
					010
					A3