

SPECIFICATION

Current Rating:0.4 AMP

Insulation Resistance:50M Ω Min.

Contact Resistance:30m Ω Max.

Dielectric Voltage:250V AC/Minute


Operation Temperature:-55°C to +85°C

MATERIAL


Insulator:High Temperature Thermoplastic,UL 94V-0

Contact Pin:Copper Alloy




ORDER INFORMATION

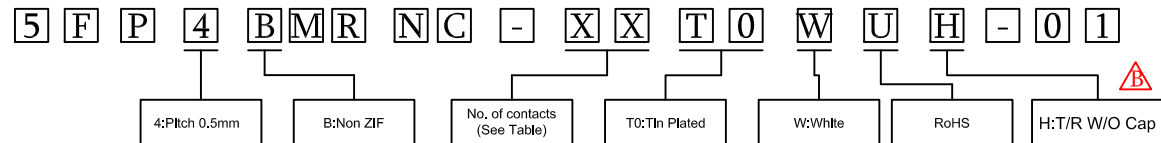

No. of Contacts	Dimensions		
	A	B	C
4	5.53	1.5	2.57
6	6.53	2.5	3.57
8	7.53	3.5	4.57
10	8.53	4.5	5.57
12	9.53	5.5	6.57
14	10.53	6.5	7.57
16	11.53	7.5	8.57
18	12.53	8.5	9.57
20	13.53	9.5	10.57
24	15.53	11.5	12.57
26	16.53	12.5	13.57
30	18.53	14.5	15.57
40	23.53	19.5	20.57
50	28.53	24.5	25.57
54	30.53	26.5	27.57
60	33.53	29.5	30.57

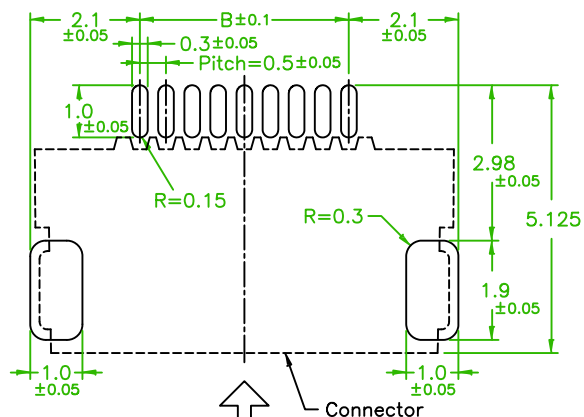

FPC/FFC INSERT DIRECTION
Recommended PCB Board Hole Layout

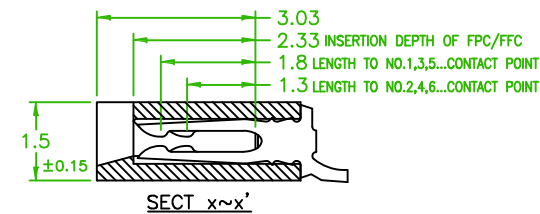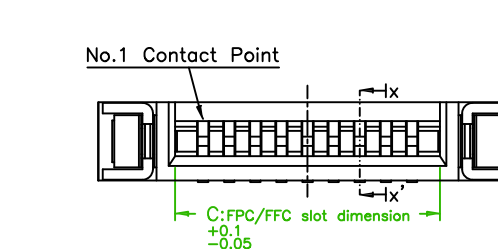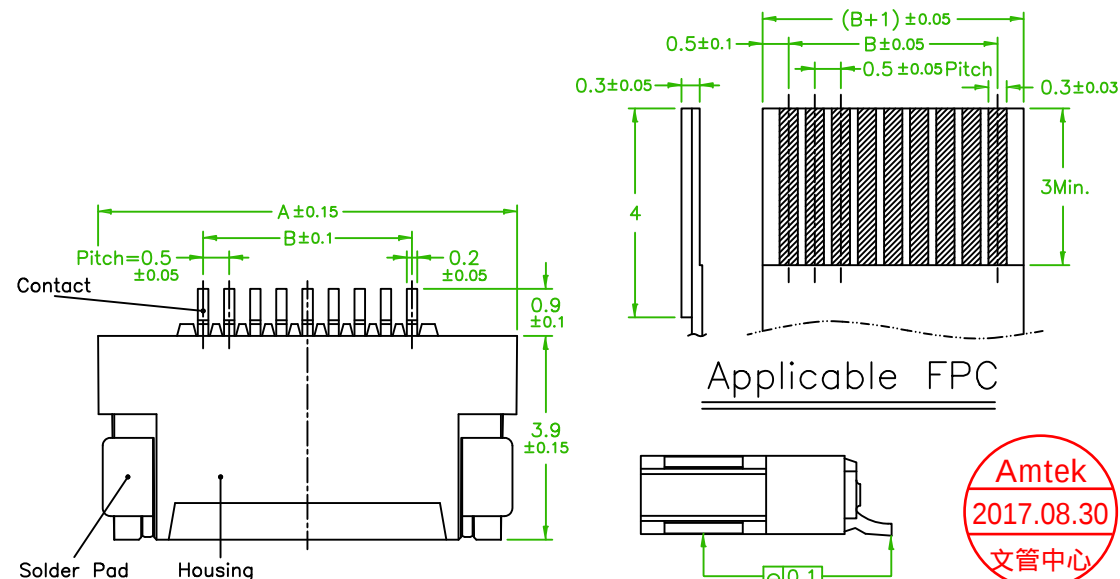

Old Part No. : FPC4BMR1B-XX-U

REV.	Revise the P/N:5FP4BMRNC-XXT0WUX-01->5FP4BMRNC-XXT0WUH-01	B	2016/09/30 Roy
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FPC/FFC 0.5mm Non Zif R/A SMT Type				頁數 Page	1/1
	品號 PART NO.	5FP4BMRNC-XXT0WUH-01				繪圖 DRAWN	Roy 2015/09/15
	圖號 DRAWING NO.					核對 CHECKED	John 2015/09/15
	客戶品號 CUSTOMER P/N					承認 APPROVED	John 2015/09/15
	公差 TOLERANCE	.X $\pm$ 0.10 .XX $\pm$ 0.05				單位 UNIT	mm
		.X $^{\circ}$ $\pm$ 3				THIRD ANGLE PROJECTION	